


• AL • BURHAN REGIONAL

◦ ARCHITECTURAL LED SYSTEMS

Light, engineered.

Manufactured in Jiangmen. Specified across Kuwait, the
UAE, China and Egypt.

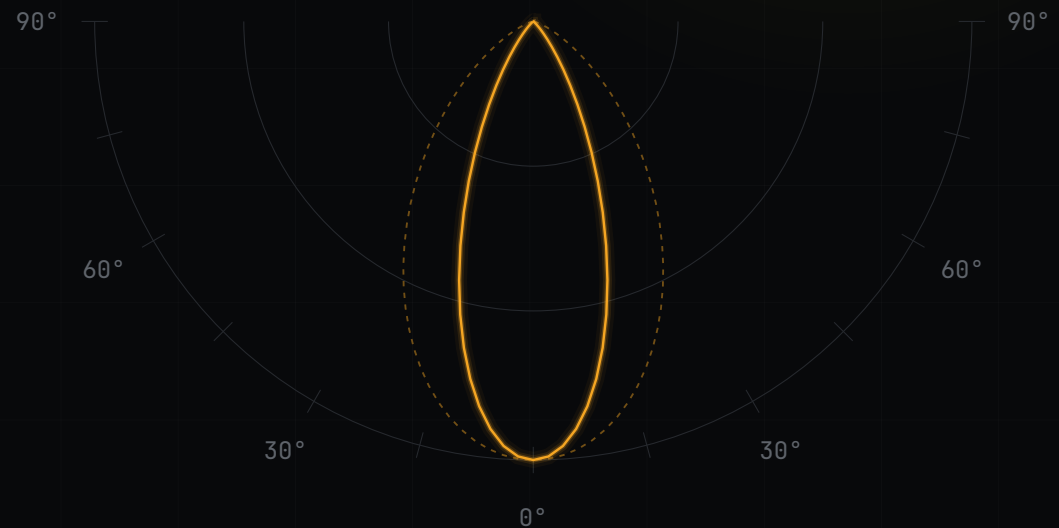

MS LIGHTING • PRODUCT BRAND

JIANGMEN BOHAN • MANUFACTURING

2025 / CATALOGUE

01/114

A regional lighting partner

Al-Burhan Regional supplies professional LED lighting for commercial, hospitality, retail, residential and façade projects. Through our product brand MS Lighting and our manufacturing base Jiangmen Bohan Lighting Co., Ltd, we control design, production and certification — then deliver through offices in Kuwait, the UAE, China and Egypt.

01



01

Manufacturing

Own factory in Jiangmen with R&D, tooling, SMT and QC.

02

Specification

Architectural optics and finishes for serious projects.

03

Certification

CE · RoHS · CB · SASO documentation for Gulf and export.

04

Network

Kuwait · UAE · China · Egypt — one coordinated supply chain.

Where we operate

Four markets. One manufacturing backbone. Coordinated project delivery.

02

01

02

03

04

05

06

07

KUWAIT

OPERATIONAL

Al-Burhan Regional Co.

Headquarters · Sales & project coordination

Al Refaei Building, 4th Floor, Tunis St, Hawally

+965 999 35 529 · info@alburhan-regional.com

UNITED ARAB EMIRATES

OPERATIONAL

Al-Burhan Hegazi

UAE sales · Specification support

Al Owais Business Tower, Al Sabkha, Dubai

+971 56 6032 765 · info@alburhan-regional.com

CHINA

FACTORY

Jiangmen Bohan Lighting Co., Ltd

Manufacturing · R&D · OEM / ODM

B2 Building, No.159 Yunxin Road, Jianghai District, Jiangmen, Guangdong

+86 137 2600 6786 · al@alburhanlighting.com *

EGYPT

OPENING 2025

Al-Burhan Egypt

Regional expansion

Cairo, Egypt

via Kuwait HQ · info@alburhan-regional.com

* Factory entity – Jiangmen Bohan Lighting Co., Ltd operates its own domain.



Jiangmen Bohan Lighting Co., Ltd

JIANGHAI DISTRICT · JIANGMEN CITY · GUANGDONG · CHINA

Own production — R&D, tooling, SMT, aging tests and QC

15+

YEARS

48+

MODELS

15

FAMILIES

100%

IN-HOUSE QC

OEM

ODM READY



Selected project references

Each project follows on its own page with photography and scope notes.

04

01	Multi-store retail rollout	KUWAIT CITY, KUWAIT	RETAIL & SHOWROOM	2024
02	Boutique hotel lobby & F&B	DUBAI, UAE	HOSPITALITY	2025
03	Coastal façade & landscape	ABU DHABI, UAE	FAÇADE & LANDSCAPE	2025
04	Headquarters office fit-out	JIANGMEN, CHINA	OFFICE	2024
05	Regional logistics depot	SHUWAIKH, KUWAIT	INDUSTRIAL & LOGISTICS	2023
06	Private villa interiors	HAWALLY, KUWAIT	RESIDENTIAL	2025



PROJECT 01 • RETAIL & SHOWROOM

Multi-store retail rollout

KUWAIT CITY, KUWAIT

2024 • Four coordinated store openings with unified fixture schedules.

Track spots, recessed grille accents and linear systems supplied with full SASO documentation. One point of contact for quantities, lead times and site coordination across all locations.

FIXTURES SPECIFIED

- Track spot light
- Recessed grille spot
- Linear light

RESULT

All four stores opened on schedule with certified import packs.



PROJECT 02 • HOSPITALITY

Boutique hotel lobby & F&B

DUBAI, UAE

2025 • Lobby, restaurant and corridor lighting layers.


Warm dim-to-warm recessed and magnetic systems specified for glare-free seated viewing. Finishes matched to the interior architect's material board.

FIXTURES SPECIFIED

- Recessed down light
- Magnetic track
- Surface down light

RESULT

Deep-dimming warm ambience held consistent across all F&B zones.

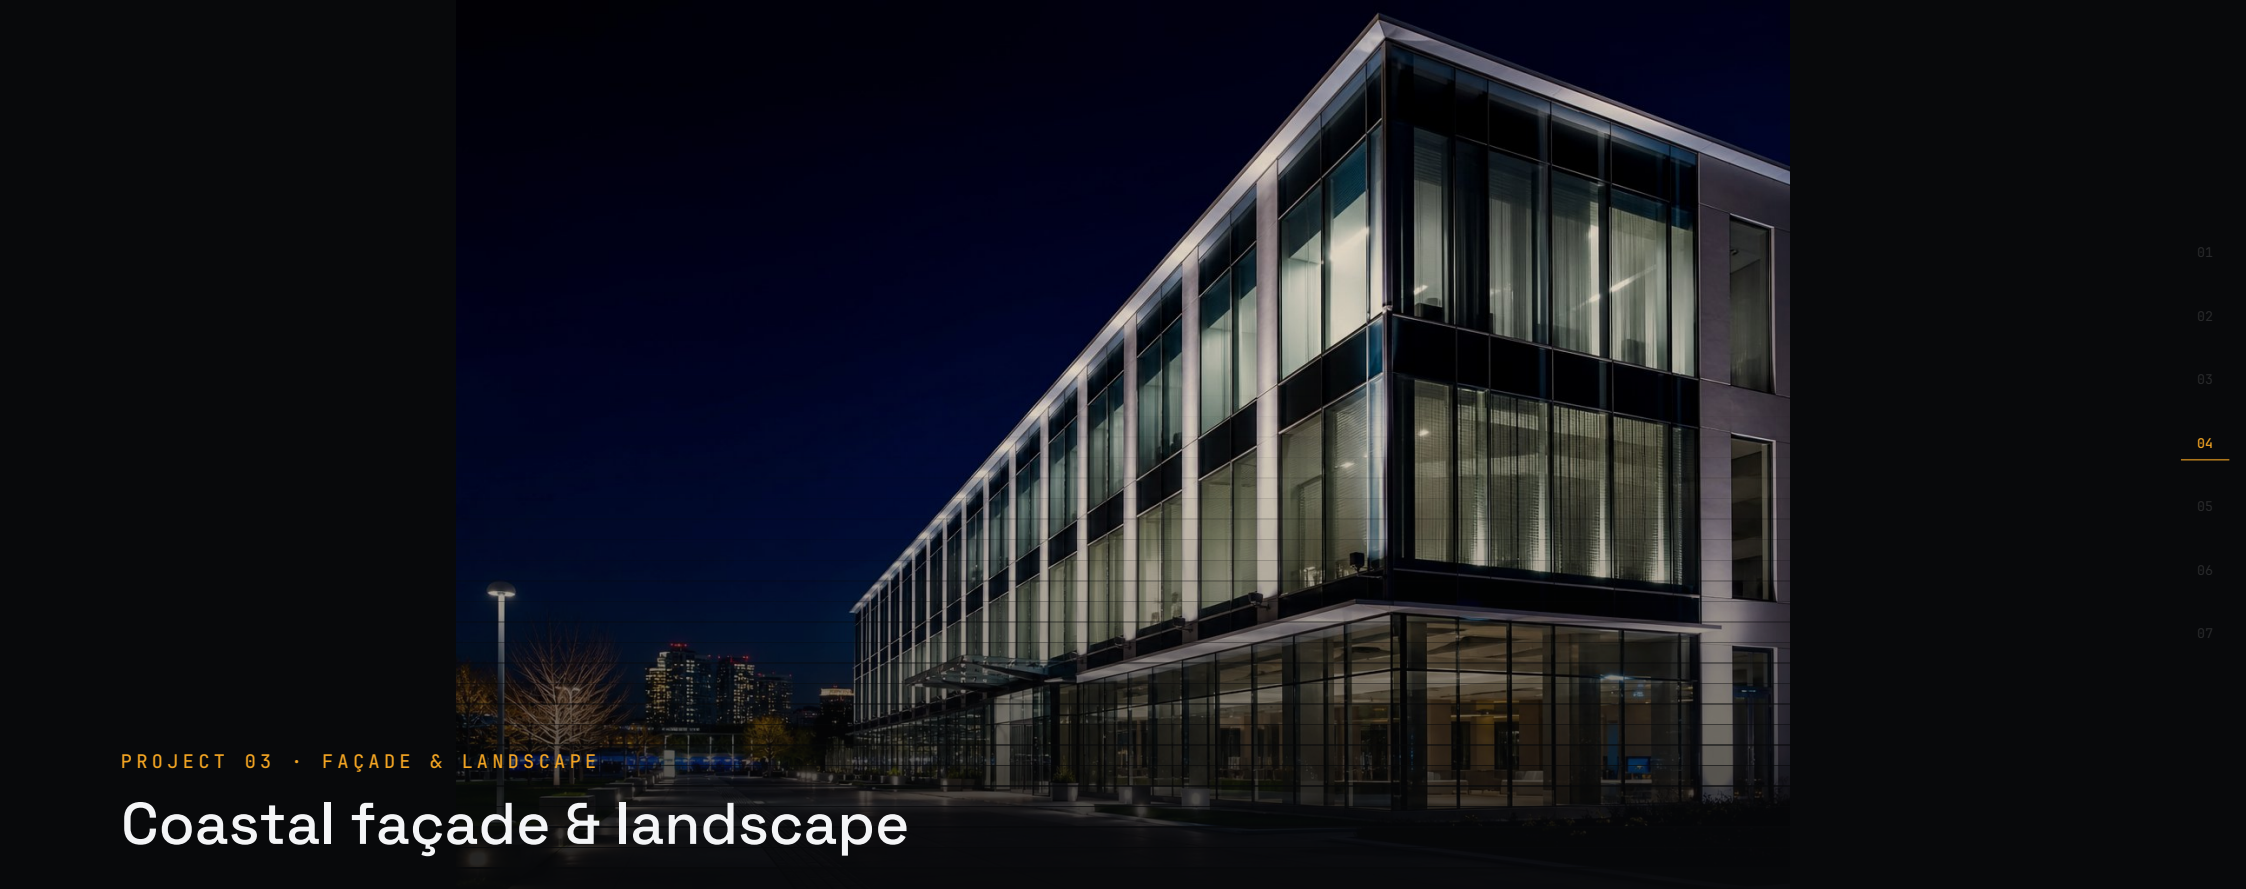

01

02

03

04

05

06

07

PROJECT 03 • FAÇADE & LANDSCAPE

Coastal façade & landscape

ABU DHABI, UAE

2025 • IP-rated wall-wash, flood and lawn markers for a waterfront scheme.

Fixtures selected for salt-air durability with full cut-off optics for neighbourhood dark-sky compliance. Night scenes commissioned with the MEP team.

FIXTURES SPECIFIED

- Flood light
- Wall light
- Lawn light

RESULT

Exterior layers passed salt-spray and dark-sky review first time.



PROJECT 04 • OFFICE

Headquarters office fit-out

JIANGMEN, CHINA

2024 • Open office, meeting rooms and circulation from reflected ceiling plans.

Photometrics, fixture schedules and certification packs returned within a week of receiving RCP drawings — factory-direct supply from Jiangmen.

FIXTURES SPECIFIED

- Recessed panel light
- Linear light
- Ceiling light

RESULT

Tender pack a week after RCPs; UGR<19 across open plan.



PROJECT 05 • INDUSTRIAL & LOGISTICS

Regional logistics depot

SHUWAIKH, KUWAIT

2023 • High-bay replacement across aisle and loading zones at 12 m mount height.

High-efficacy industrial fixtures delivering uniform aisle illumination with reduced energy load versus the previous metal-halide install.

FIXTURES SPECIFIED

- High bay
- Flood light

RESULT

150+ lm/W system efficacy; ~40% energy reduction vs metal halide.



PROJECT 06 • RESIDENTIAL

Private villa interiors

HAWALLY, KUWAIT

2025 • Living, dining and gallery spaces — warm 2700K domestic white.

Trimless recessed and magnetic track throughout principal rooms. Quiet ceilings with architectural discipline at domestic scale.

FIXTURES SPECIFIED

- Recessed down light
- Magnetic track
- Module series

RESULT

Quiet trimless ceilings; a single warm 2700K white throughout.

Technical datasheets by family

Ten product families. Full specification plates follow each divider.

05


01		Recessed Down Light	10 technical datasheets	02		Surface Mounted Down Light	10 technical datasheets
03		Recessed Panel Light	10 technical datasheets	04		Ceiling Light	10 technical datasheets
05		Linear Light	10 technical datasheets	06		Track Spot Light	10 technical datasheets
07		Magnetic Track Light	10 technical datasheets	08		Wall Light	10 technical datasheets
09		Lawn & Landscape Light	9 technical datasheets	10		Flood Light	1 technical datasheet

Certification — CE · RoHS · CB and SASO documentation packs are prepared per fixture and per order for Gulf import and export.

Recessed Down Light

10 TECHNICAL DATASHEETS



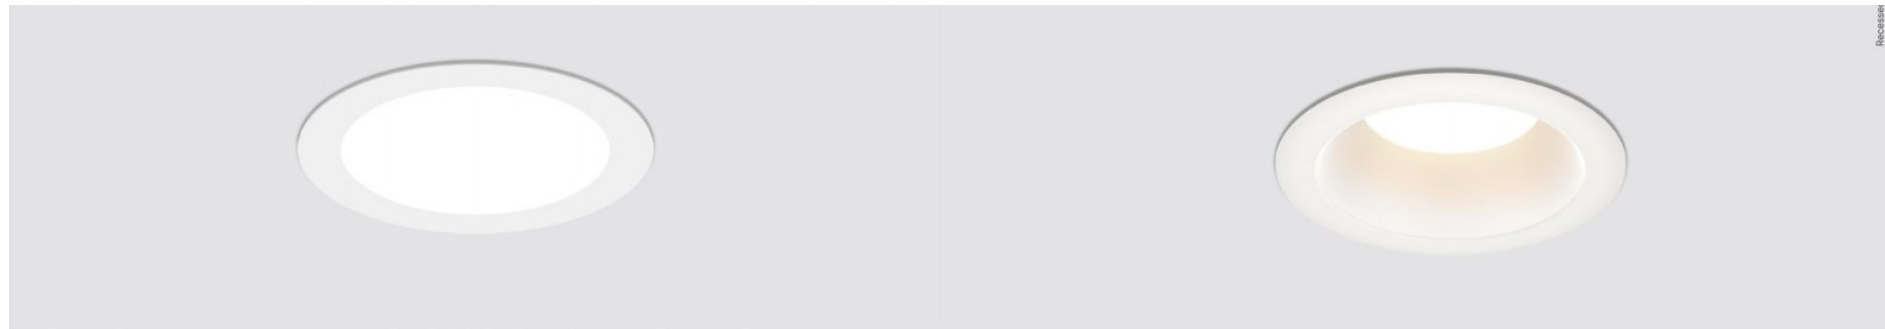

DL210 Downlight



DL210 LED downlight is with super slim design, external driver, adopting high lumen SMD LED with uniform light. Interchangeable CCT with slide switch is available. IP54 waterproof for front side.

Materials of Housing : Aluminium
Materials of Optics : PC



Code	Watt	Size(Ax8mm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL210-3-10W	10W	Ø110x30	Ø90-95	1000lm	0.25	36PCS
DL210-3-13W	13W	Ø110x30	Ø90-95	1320lm	0.25	36PCS
DL210-4-13W	13W	Ø145x30	Ø120-130	1370lm	0.35	30PCS
DL210-4-18W	18W	Ø145x30	Ø120-130	1980lm	0.35	30PCS
DL210-6-18W	18W	Ø190x30	Ø160-170	1930lm	0.50	24PCS
DL210-6-25W	25W	Ø190x30	Ø160-170	2750lm	0.50	24PCS
DL210-8-25W	25W	Ø225x34	Ø200-210	2750lm	0.65	12PCS
DL210-8-35W	35W	Ø225x34	Ø200-210	3900lm	0.65	12PCS
DL210-8-42W	42W	Ø225x34	Ø200-210	4750lm	0.65	12PCS

CCT — 3000K — 4000K — 5700K

Trim — White — Black

DL216 Downlight



DL216 LED downlight is with high lumen SMD LED. Deep trim design provides soft lighting for eyes. external driver is available for triac dim, 0-10V and DALI. 3CCT changeable with slide switch is available. IP44 waterproof for front side.


Materials of Housing : Aluminium
Materials of Optics : PC



Code	Watt	Size(Ax8mm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL216-3-8W	8W	Ø115x45	Ø90-105	790lm	0.20	36PCS
DL216-3.5-10W	10W	Ø129x45	Ø105-115	1045lm	0.24	36PCS
DL216-4-13W	13W	Ø152x48	Ø125-140	1355lm	0.30	24PCS
DL216-5-20W	20W	Ø175x52	Ø145-160	2090lm	0.40	12PCS
DL216-7-25W	25W	Ø203x56	Ø175-190	2610lm	0.50	12PCS
DL216-7-30W	30W	Ø203x56	Ø175-190	2950lm	0.50	12PCS
DL216-8-33W	33W	Ø228x63	Ø205-215	3445lm	0.65	6PCS
DL216-8-40W	40W	Ø228x63	Ø205-215	4000lm	0.65	6PCS

CCT — 3000K — 4000K — 5700K

Trim — White — Black

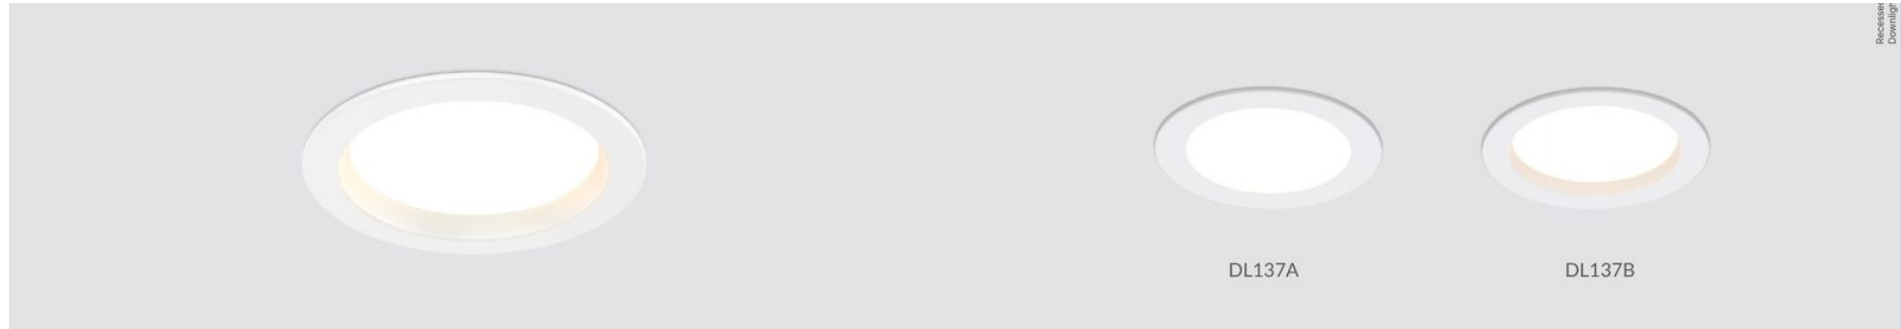

DL422 NEW Downlight



DL422 LED downlight adapts high lumen SMD with external driver design. It is power changeable version and CCT changeable is for your option. On/off, triac dim and DALI dim are available. IP54 waterproof provides great protection level.

Materials of Housing : Aluminium
Materials of Optics : PC



Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL422-3-13W	10W/13W	Ø115x52	90-95	1400lm	0.20	36PCS
DL422-4-15W	12W/15W	Ø145x55	120-130	1700lm	0.25	36PCS
DL422-5-25W	20W/25W	Ø170x60	140-150	2950lm	0.34	24PCS
DL422-6-25W	20W/25W	Ø190x62	160-170	3000lm	0.37	12PCS
DL422-8-35W	28W/35W	Ø235x67	200-210	4300lm	0.47	12PCS
DL422-10-40W	30W/40W	Ø280x78	230-260	5000lm	0.61	6PCS

CCT — 3000K — 4000K — 5700K

Trim — White — Black

DL137 Downlight



DL137A flat cover & DL137B step cover, super slim downlight. It adopts high lumen SMD LED with even light output. External driver is available for triac dim. It is IP54 for LED cover part and can do CCT changeable.

Materials of Housing : Aluminium Coated Plastic
Materials of Optics : PC



Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL137A-2.5-7W	7W	Ø85x30	Ø68-75	750lm	0.17	48PCS
DL137A-3-8W	8W	Ø110x30	Ø90-100	940lm	0.20	36PCS
DL137B-2.5-7W	7W	Ø85x36	Ø68-75	710lm	0.18	48PCS
DL137B-3-8W	8W	Ø110x36	Ø90-100	900lm	0.21	36PCS
DL137B-4-12W	12W	Ø145x46	Ø120-130	1480lm	0.36	24PCS
DL137B-4-16W	16W	Ø145x46	Ø120-130	1970lm	0.36	24PCS
DL137B-5-18W	18W	Ø170x46	Ø140-150	2250lm	0.42	12PCS
DL137B-6-18W	18W	Ø190x46	Ø160-170	2370lm	0.54	12PCS
DL137B-6-25W	25W	Ø190x46	Ø160-170	3180lm	0.54	12PCS
DL137B-6-30W	30W	Ø190x46	Ø160-170	4000lm	0.54	12PCS
DL137B-8-18W	18W	Ø235x46	Ø200-210	2430lm	0.72	12PCS
DL137B-8-25W	25W	Ø235x46	Ø200-210	3285lm	0.72	12PCS
DL137B-8-35W	35W	Ø235x46	Ø200-210	4420lm	0.72	12PCS

CCT — 3000K — 4000K — 5700K

Trim — White — Black



DL317 Downlight



DL317 LED downlight adopts high lumen SMD LED, deep housing has been deepened to reduce the glare. Dimmable flicker free driver shares great popularity by the excellent dimming effect. Interchangeable CCT with slide switch is available, IP54 waterproof for front side.

Materials of Housing : Aluminium coated plastic
Materials of Optics : PC



Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL317-3-10W	10W	Ø115x70.5	Ø90-95	910lm	0.20	30PCS
DL317-6-16W	16W	Ø190x102	Ø160-170	1660lm	0.40	12PCS
DL317-8-20W	20W	Ø240x117	Ø200-210	2250lm	0.56	12PCS

CCT — 3000K — 4000K — 5700K

Trim — White — Black

DL134 Downlight



DL134 LED downlight with SMD LED, internal driver. Deep trim design provides soft lighting. IP54 waterproof for internal use. CCT switchable by slide switch is available.


Materials of Housing : Aluminium Coated Plastic
Materials of Optics : PC




Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL134-3-10W	10W	Ø115x83.4	Ø90-95	880lm	0.17	36PCS
DL134-4-13W	13W	Ø145x97.5	Ø125-130	1230lm	0.25	24PCS
DL134-6-16W	16W	Ø190x115.3	Ø160-170	1720lm	0.40	12PCS
DL134-8-20W	20W	Ø240x132.5	Ø200-210	2150lm	0.55	12PCS

CCT — 3000K — 4000K — 5700K

Trim — White

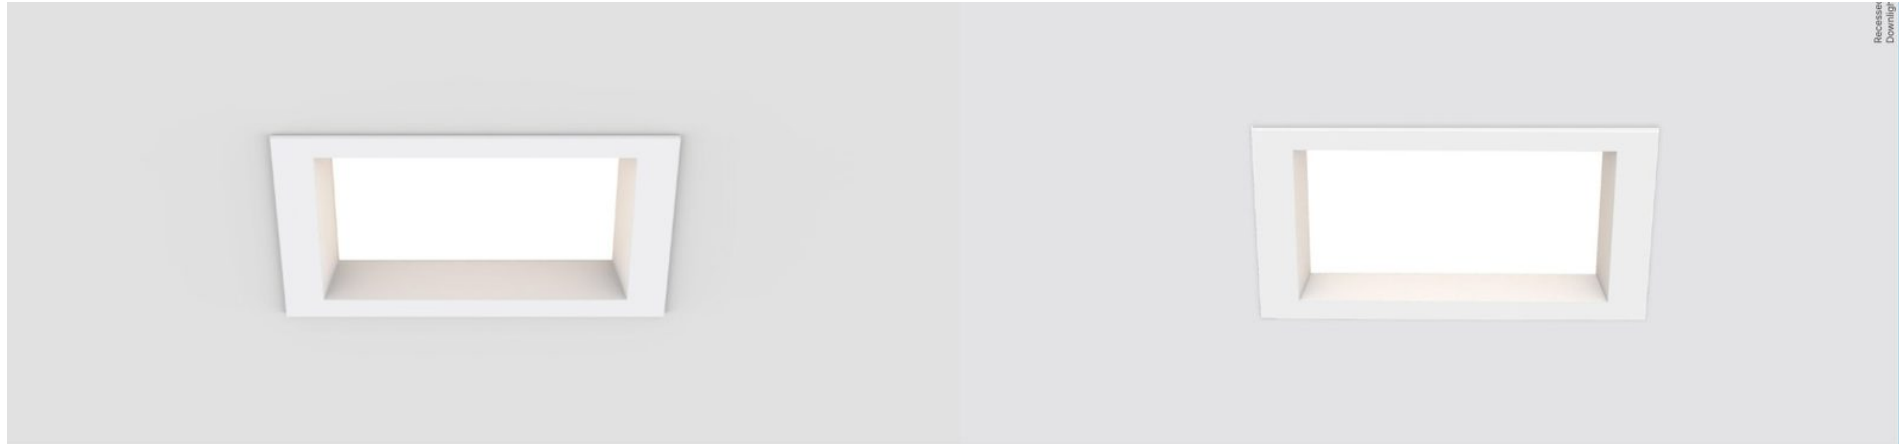

DL308B Downlight



DL308B LED downlight as square design is with high lumen SMD LED, external driver triac dimmable as option, IP54 protection level. CCT changeable by slide switch is available.


Materials of Housing : Aluminium
Materials of Optics : PC



Code	Watt	Size(AxBxCmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL308B-3-10W	10W	110x110x52	90x90	1050lm	0.26	24PCS
DL308B-4-12W	12W	145x145x53	120x120	1560lm	0.40	18PCS
DL308B-4-18W	18W	145x145x53	120x120	2160lm	0.40	18PCS
DL308B-6-18W	18W	190x190x53	160x160	2195lm	0.58	12PCS
DL308B-6-25W	25W	190x190x53	160x160	2830lm	0.58	12PCS
DL308B-8-18W	18W	228x228x55	200x200	2450lm	0.92	6PCS
DL308B-8-25W	25W	228x228x55	200x200	3270lm	0.92	6PCS
DL308B-8-35W	35W	228x228x55	200x200	4380lm	0.92	6PCS

CCT — 3000K — 4000K — 5700K Trim — White

DL34 Downlight




DL34 LED downlight with high lumen SMD LED, square shape, external driver triac, 0-10V, DALI for option. IP20/IP44 waterproof available.

Materials of Housing : Aluminium
Materials of Optics : PMMA



Code	Watt	Size(AxBxCmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL34-3-13W	13W	110x110x44	90-95	940lm	0.40	24PCS
DL34-6-25W	25W	190x190x54	160-170	2300lm	1.11	12PCS

CCT — 3000K — 4000K — 5700K Trim — White — Black

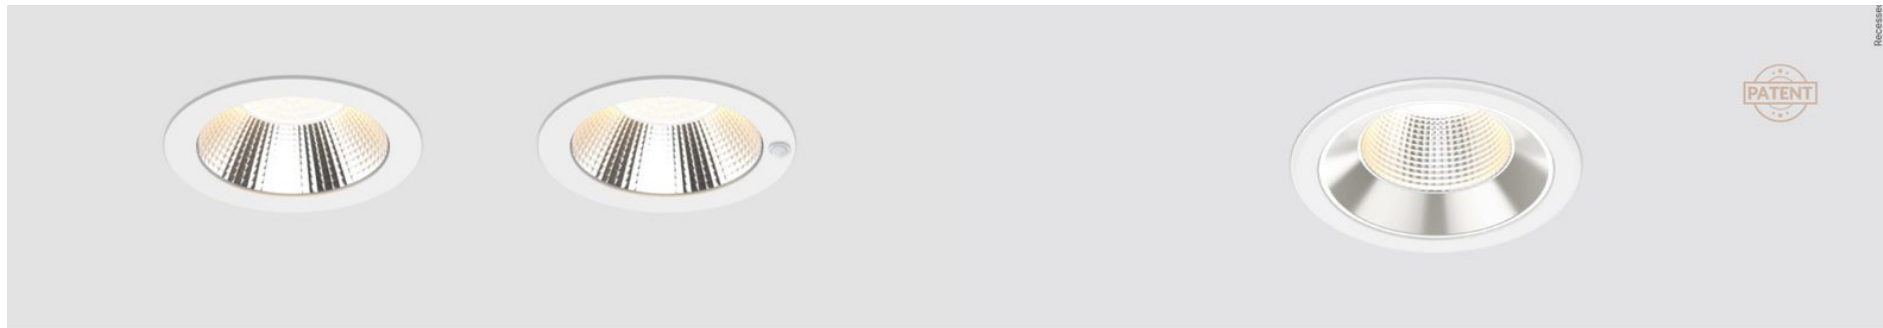

DL367 Downlight



DL367 SMD downlight is with high lumen efficiency 130lm/w as external driver. The concave design in front and reflector+lens optic combination reduced the height of the lamp and make it anti-glare. Besides, can do surface mounted with extra accessory for 4/6/8 inches. More function as CCT adjustable, sensor available, one lamp with multiple function use.

Materials of Housing : Aluminium die-casting
Materials of Optics : PC+Aluminium



Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL367-4-9W	9W	Ø145x55	Ø120-130	1300lm	0.32	24PCS
DL367-4-12W	12W	Ø145x55	Ø120-130	1750lm	0.32	24PCS
DL367-5-11W	11W	Ø170x58	Ø140-150	1600lm	0.39	24PCS
DL367-5-16W	16W	Ø170x58	Ø140-150	2200lm	0.39	24PCS
DL367-6-12W	12W	Ø190x61	Ø160-170	1780lm	0.44	24PCS
DL367-6-18W	18W	Ø190x61	Ø160-170	2550lm	0.44	24PCS
DL367-6-24W	24W	Ø190x61	Ø160-170	3200lm	0.44	24PCS
DL367-8-12W	12W	Ø228x61	Ø200-210	1850lm	0.59	24PCS
DL367-8-18W	18W	Ø228x61	Ø200-210	2650lm	0.59	24PCS
DL367-8-24W	24W	Ø228x61	Ø200-210	3450lm	0.59	24PCS
DL367-6-9W-S1	9W	Ø180x63	Ø160-170	1300lm	0.6	12PCS
DL367-6-12W-S1	12W	Ø180x63	Ø160-170	1750lm	0.6	12PCS



DL264 Downlight



DL264 LED downlight with anti-glare UGR<19 and external driver design. Adopting high lumen SMD light source 100lm/W, the scale PC shade and reflector make a uniform light output. Interchangeable CCT and IP54 in front are available.

Materials of Housing : PC/Aluminium
Materials of Optics : PC




Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL264-3-10W	10W	Ø115x67mm	Ø90-95mm	950lm	0.21	30PCS
DL264-3-13W	13W	Ø115x67mm	Ø90-95mm	1200lm	0.21	30PCS
DL264-4-13W	13W	Ø145x73mm	Ø120-130mm	1200lm	0.26	24PCS
DL264-4-18W	18W	Ø145x73mm	Ø120-130mm	1500lm	0.26	24PCS
DL264-5-13W	13W	Ø170x86mm	Ø140-150mm	1350lm	0.31	24PCS
DL264-5-18W	18W	Ø170x86mm	Ø140-150mm	1850lm	0.31	24PCS
DL264-5-25W	25W	Ø170x86mm	Ø140-150mm	2650lm	0.31	24PCS
DL264-6-18W	18W	Ø190x90mm	Ø160-170mm	1850lm	0.36	12PCS
DL264-6-25W	25W	Ø190x90mm	Ø160-170mm	2650lm	0.36	12PCS
DL264-6-30W	30W	Ø190x90mm	Ø160-170mm	3150lm	0.36	12PCS
DL264-8-18W	18W	Ø235x100mm	Ø200-210mm	1850lm	0.52	12PCS
DL264-8-25W	25W	Ø235x100mm	Ø200-210mm	2650lm	0.52	12PCS
DL264-8-35W	35W	Ø235x100mm	Ø200-210mm	3600lm	0.52	12PCS





DL83 Downlight



DL83 SMD downlight, a high-performance LED downlight for accenting and general lighting. The luminaire provides enhanced glare control and leading performance, making it ideal for commercial and residential environments.

Materials of Housing : Aluminium
Materials of Optics : PMMA



Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL83-3-13W	13W	Ø110x80	Ø90-100	1160lm	0.33	30PCS
DL83-6-25W	25W	Ø190x100	Ø160-180	2620lm	0.76	12PCS
DL83-8-35W	35W	Ø230x110	Ø200-220	3700lm	0.98	12PCS

CCT — 3000K — 4000K — 5700K — Trim — White — Black

DL315 Downlight



DL315 deep reflector downlight which adopts high lumen efficiency SMD 100lm/W. Three covers for option, honeycomb cover and tri-reflector cover make a low UGR. Adapter ring makes a wider application area and convenient installation. IP54 in front and tri-color changeable are available.

Materials of Housing : Die-casting Aluminium
Materials of Optics : PC + Aluminium



Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL315-2.5-8W	8W	Ø87x73	Ø68-75	760lm	0.24	24PCS
DL315-3-10W	10W	Ø110x84	Ø95-100	1000lm	0.31	18PCS
DL315-3-13W	13W	Ø110x84	Ø95-100	1200lm	0.31	18PCS
DL315-4-18W	18W	Ø135x96	Ø120-125	1850lm	0.46	18PCS
DL315-4-25W	25W	Ø135x96	Ø120-125	2350lm	0.46	18PCS
DL315-6-25W	25W	Ø160x117	Ø150-155	2850lm	0.64	12PCS
DL315-6-35W	35W	Ø160x117	Ø150-155	3850lm	0.64	12PCS
DL315-8-35W	35W	Ø186x128	Ø170-175	3800lm	0.85	6PCS
DL315-8-42W	42W	Ø186x128	Ø170-175	4400lm	0.85	6PCS

CCT — 3000K — 4000K — 5700K — Trim — White — Black

DL179 Downlight



DL179 SMD LED downlight, designed with a traditional deep reflector, which provides perfect and comfortable lighting. External driver solution both in dimmable and non-dimmable version achieves great dimming compatibility with world brand dimmers.

Reflector



Materials of Housing : Die-casting Aluminium

Materials of Optics : PC

Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL179A-3-10W	10W	Ø95x54	Ø82-88	830lm	0.23	36PCS
DL179A-3-10W	10W	Ø95x54	Ø82-88	1030lm	0.23	36PCS
DL179B-3-10W	10W	Ø110x54	Ø90-95	870lm	0.27	36PCS
DL179B-3-10W	10W	Ø110x54	Ø90-95	1040lm	0.27	36PCS
DL179B-3-13W	13W	Ø110x54	Ø90-95	1140lm	0.27	36PCS
DL179-4-10W	10W	Ø145x78	Ø125-135	900lm	0.46	18PCS
DL179-4-12W	12W	Ø145x78	Ø125-135	1390lm	0.46	18PCS
DL179-4-18W	18W	Ø145x78	Ø125-135	1950lm	0.46	18PCS
DL179-4-25W	25W	Ø145x78	Ø125-135	2250lm	0.46	18PCS
DL179-6-18W	18W	Ø172x90	Ø150-165	1900lm	0.67	12PCS
DL179-6-18W	18W	Ø172x90	Ø150-165	2250lm	0.67	12PCS
DL179-6-25W	25W	Ø172x90	Ø150-165	2650lm	0.67	12PCS
DL179-6-35W	35W	Ø172x90	Ø150-165	3180lm	0.67	12PCS
DL179-8-18W	18W	Ø228x99	Ø200-210	2070lm	1.08	12PCS
DL179-8-25W	25W	Ø228x99	Ø200-210	2800lm	1.08	12PCS
DL179-8-25W	25W	Ø228x99	Ø200-210	3000lm	1.08	12PCS
DL179-8-35W/ 40W/45W	35W/40W/45W	Ø228x99	Ø200-210	4000lm/4400lm/4950lm	1.08	12PCS

CCT — 3000K — 4000K — 5700K

Trim — White — Black

DL179 Narrow Trim



DL179 SMD LED downlight, designed with a traditional deep reflector and die-casting housing, provides perfect and comfortable lighting and excellent thermal dissipation. External driver solution both in dimmable and non-dimmable version achieves great dimming compatibility with world brand dimmers.

Reflector




Materials of Housing : Aluminium

Materials of Optics : PC

Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL179B-3-10W	10W	Ø100x54	Ø90	870lm	0.23	36PCS
DL179B-3-13W	13W	Ø100x54	Ø90	1140lm	0.27	36PCS
DL179-4-10W	10W	Ø130x78	Ø120	900lm	0.46	18PCS
DL179-4-18W	18W	Ø130x78	Ø120	1950lm	0.46	18PCS
DL179-4-25W	25W	Ø130x78	Ø120	2250lm	0.46	18PCS
DL179-6-18W	18W	Ø160x90	Ø150	1900lm	0.67	12PCS
DL179-6-25W	25W	Ø160x90	Ø150	2650lm	0.67	12PCS
DL179-6-35W	35W	Ø160x90	Ø150	3180lm	0.67	12PCS
DL179-8-18W	18W	Ø210x99	Ø200	2070lm	1.08	12PCS
DL179-8-25W	25W	Ø210x99	Ø200	2800lm	1.08	12PCS
DL179-8-35W	35W	Ø210x99	Ø200	4000lm	1.08	12PCS
DL179-8-40W	40W	Ø210x99	Ø200	4400lm	1.08	12PCS
DL179-8-45W	45W	Ø210x99	Ø200	4500lm	1.08	12PCS

CCT — 3000K — 4000K — 5700K

Trim — White — Black

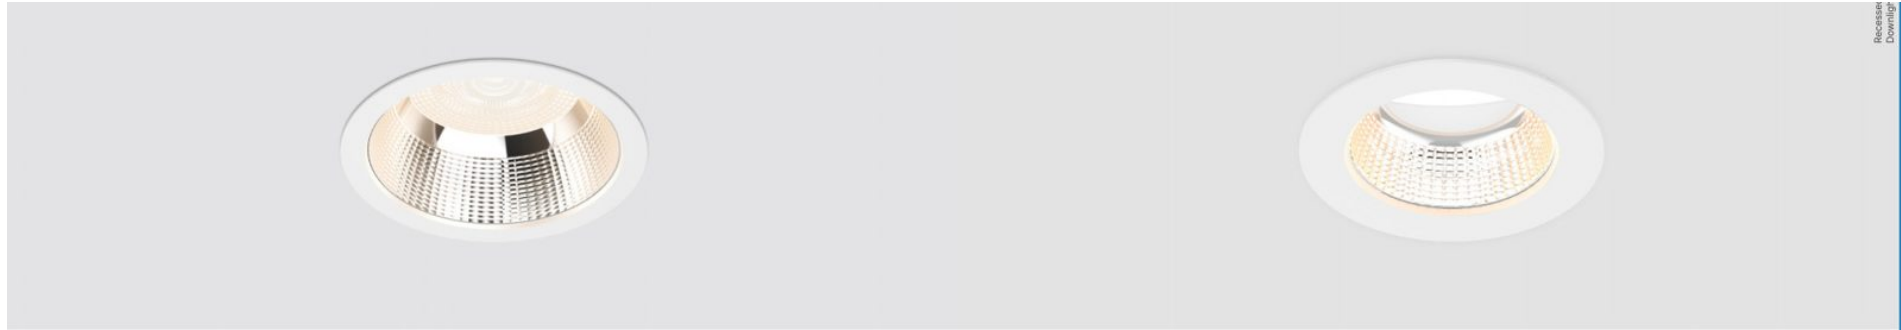

DL178 Narrow Trim



DL178 downlight with deep-set reflector provides better glaring control (UGR<19). The luminaire with modular design offers a wide choice of beam angles, 24°/36°/60° for optional. Adopted COB CITIZEN brand to reach high efficiency 110lm/W and energy saving. The luminaire blends harmoniously into ceilings, making it ideal for commercial and residential applications.

Reflector



Materials of Housing : Aluminium

Materials of Optics : PC

Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL178B-3-10W	10W	Ø100x54	Ø90	1120lm	0.27	36PCS
DL178-3-13W	13W	Ø100x54	Ø90	1300lm	0.27	36PCS
DL178-4-10W	10W	Ø130x78	Ø120	1150lm	0.48	18PCS
DL178-4-18W	18W	Ø130x78	Ø120	2250lm	0.48	18PCS
DL178-4-25W	25W	Ø130x78	Ø120	2750lm	0.48	18PCS
DL178-6-18W	18W	Ø160x90	Ø150	2200lm	0.70	12PCS
DL178-6-25W	25W	Ø160x90	Ø150	2850lm	0.70	12PCS
DL178-6-35W	35W	Ø160x90	Ø150	3670lm	0.70	12PCS
DL178-8-18W	18W	Ø210x99	Ø200	2070lm	1.11	12PCS
DL178-8-25W	25W	Ø210x99	Ø200	2850lm	1.11	12PCS
DL178-8-35W	35W	Ø210x99	Ø200	3900lm	1.11	12PCS

CCT — 2700K — 3000K — 4000K



Trim — White — Black

DL178 ^{NEW} Asymmetric downlight



DL178 downlight with deep-set reflector provides better glaring control (UGR<19), asymmetric beam angle can be wall washer. A variety of dimming modes and three color temperatures are available.

Materials of Housing : Aluminium


Materials of Optics : PC



Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL178B-3-8W	8W	Ø110x54	Ø90-95	448lm	0.27	36PCS
DL178B-3-10W	10W	Ø110x54	Ø90-95	570lm	0.27	36PCS
DL178-4-10W	10W	Ø145x78	Ø125-135	600lm	0.48	18PCS
DL178-4-13W	13W	Ø145x78	Ø125-135	930lm	0.48	18PCS

CCT — 3000K — 4000K — 5700K

Trim — White — Black

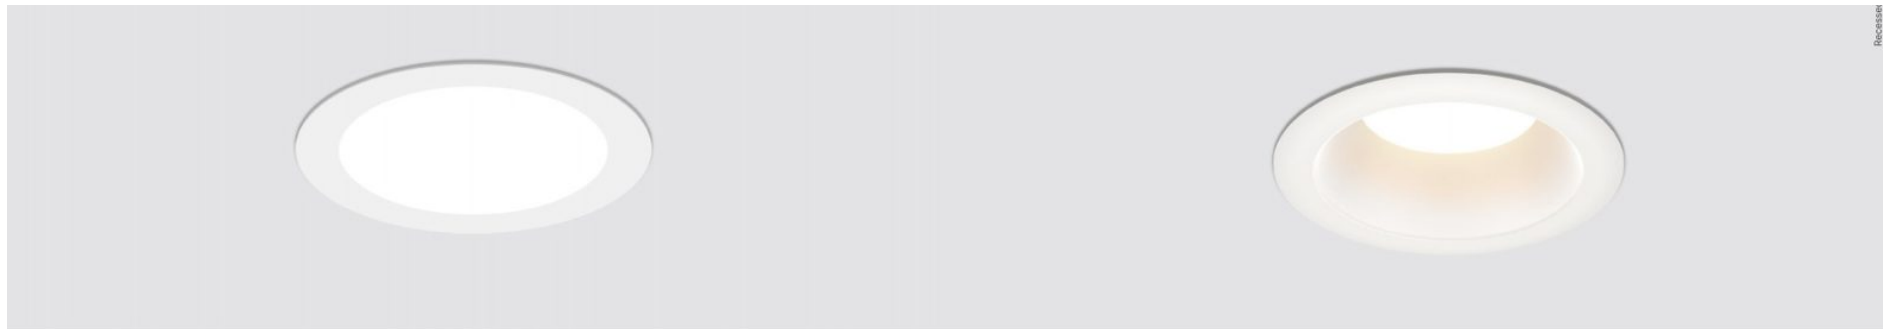

DL210 Downlight



DL210 LED downlight is with super slim design, external driver, adopting high lumen SMD LED with uniform light. Interchangeable CCT with slide switch is available. IP54 waterproof for front side.

Materials of Housing : Aluminium
Materials of Optics : PC



Code	Watt	Size(Ax8mm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL210-3-10W	10W	Ø110x30	Ø90-95	1000lm	0.25	36PCS
DL210-3-13W	13W	Ø110x30	Ø90-95	1320lm	0.25	36PCS
DL210-4-13W	13W	Ø145x30	Ø120-130	1370lm	0.35	30PCS
DL210-4-18W	18W	Ø145x30	Ø120-130	1980lm	0.35	30PCS
DL210-6-18W	18W	Ø190x30	Ø160-170	1930lm	0.50	24PCS
DL210-6-25W	25W	Ø190x30	Ø160-170	2750lm	0.50	24PCS
DL210-8-25W	25W	Ø225x34	Ø200-210	2750lm	0.65	12PCS
DL210-8-35W	35W	Ø225x34	Ø200-210	3900lm	0.65	12PCS
DL210-8-42W	42W	Ø225x34	Ø200-210	4750lm	0.65	12PCS

CCT — 3000K — 4000K — 5700K

Trim — White — Black

DL216 Downlight



DL216 LED downlight is with high lumen SMD LED. Deep trim design provides soft lighting for eyes. external driver is available for triac dim, 0-10V and DALI. 3CCT changeable with slide switch is available. IP44 waterproof for front side.


Materials of Housing : Aluminium
Materials of Optics : PC



Code	Watt	Size(Ax8mm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL216-3-8W	8W	Ø115x45	Ø90-105	790lm	0.20	36PCS
DL216-3.5-10W	10W	Ø129x45	Ø105-115	1045lm	0.24	36PCS
DL216-4-13W	13W	Ø152x48	Ø125-140	1355lm	0.30	24PCS
DL216-5-20W	20W	Ø175x52	Ø145-160	2090lm	0.40	12PCS
DL216-7-25W	25W	Ø203x56	Ø175-190	2610lm	0.50	12PCS
DL216-7-30W	30W	Ø203x56	Ø175-190	2950lm	0.50	12PCS
DL216-8-33W	33W	Ø228x63	Ø205-215	3445lm	0.65	6PCS
DL216-8-40W	40W	Ø228x63	Ø205-215	4000lm	0.65	6PCS

CCT — 3000K — 4000K — 5700K

Trim — White — Black

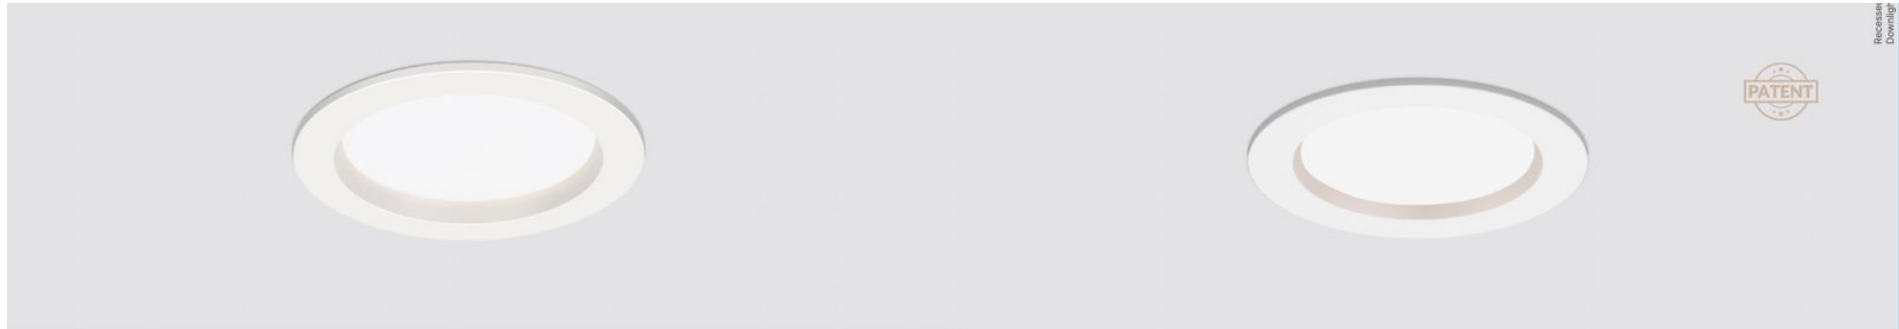


DL110 Downlight



DL110 LED downlight is with high lumen SMD LED. IP65 waterproof for indoor and outdoor use.

Materials of Housing : Aluminium
Materials of Optics : PMMA



Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL110-3-13W	13W	Ø115x55.5	Ø95-100	1320lm	0.40	24PCS
DL110-4-18W	18W	Ø155x67	Ø120-130	1830lm	0.61	24PCS
DL110-6-25W	25W	Ø195x46.5	Ø175-185	2550lm	0.75	12PCS
DL110-8-35W	35W	Ø235x54.5	Ø205-215	3570lm	1.08	12PCS

CCT — 3000K — 4000K — 5700K — Trim — White — Black

DL54 Downlight



DL54 LED downlight with SMD LED, internal driver for triac dimmable available. IP40/IP54 available for choice. CCT switchable by slide switch is available.

Materials of Housing : Aluminium Coated Plastic
Materials of Optics : PMMA




Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL54C-2.5-7W-P3	7W	Ø85x68	Ø68-75	700lm	0.12	50PCS
DL54C-3-8W	8W	Ø115x58	Ø90-95	750lm	0.20	30PCS
DL54C-3-8W-C3(P3)	8W	Ø115x61	Ø90-95	750lm	0.20	30PCS
DL54C-3-10W	10W	Ø115x58	Ø90-95	940lm	0.20	30PCS
DL54C-3-10W-C3(P3)	10W	Ø115x61	Ø90-95	940lm	0.20	30PCS
DL54B-4-13W	13W	Ø145x61	Ø120-130	1100lm	0.28	30PCS
DL54B-4-13W-C3(P3)	13W	Ø145x62.5	Ø120-130	1300lm	0.28	30PCS
DL54B-6-16W	16W	Ø190x74	Ø160-170	1550lm	0.51	30PCS
DL54B-6-16W-C3(P3)	16W	Ø190x75.5	Ø160-170	1760lm	0.41	30PCS
DL54B-8-20W	20W	Ø225x84	Ø200-210	1840lm	0.64	20PCS
DL54B-8-20W-C3(P3)	20W	Ø225x84	Ø200-210	2100lm	0.52	20PCS

CCT — 3000K — 4000K — 5700K — Trim — White — Black
Ring — ACC-DL54 Nickel brushed


Surface Mounted Down Light

10 TECHNICAL DATASHEETS



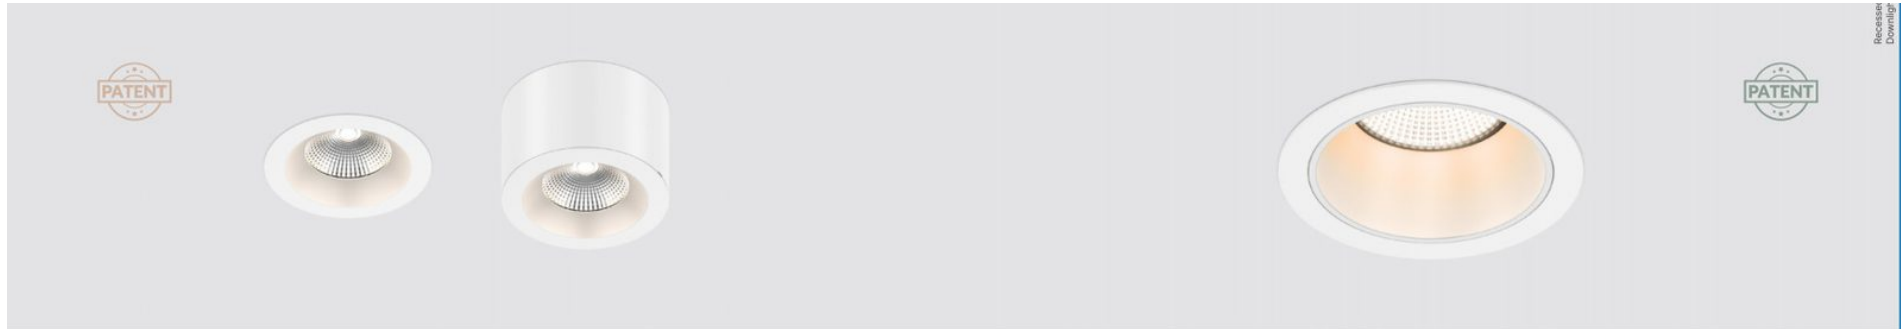

DL326 Downlight

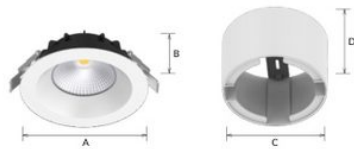

DL326 is a super slim COB downlight, which can be recessed and surface mounted with extra accessory, 4", 6", 8" .

Materials of Housing : Die-casting Aluminium

Materials of Optics : Reflector+Tempered glass



Code	Watt	Size(AxB/CxDmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL326-2.5-6W	6W	Ø85x36	Ø68-75	620lm	0.19	36PCS
DL326-3-10W	10W	Ø110x45	Ø90-95	1000lm	0.26	36PCS
DL326-3-13W	13W	Ø110x45	Ø90-95	1330lm	0.26	36PCS
DL326-4-13W	13W	Ø145x52	Ø120-130	1380lm	0.39	30PCS
DL326-4-18W	18W	Ø145x52	Ø120-130	1990lm	0.39	30PCS
DL326-6-18W	18W	Ø190x52	Ø160-170	2290lm	0.58	20PCS
DL326-6-25W	25W	Ø190x52	Ø160-170	3080lm	0.58	20PCS
DL326-8-18W	18W	Ø228x59	Ø200-210	2160lm	0.78	12PCS
DL326-8-25W	25W	Ø228x59	Ø200-210	2990lm	0.78	12PCS
DL326-8-35W	35W	Ø228x59	Ø200-210	3860lm	0.78	12PCS
ACC-DL326-4-WT	-	Ø148x93	-	-	0.34	24PCS
ACC-DL326-6-WT	-	Ø193x93	-	-	0.43	12PCS
ACC-DL326-8-WT	-	Ø232x93	-	-	0.53	12PCS



CL94 Downlight




CL94 LED downlight designed with a deep reflector, provides optimal glare control(UGR<19). It adopts brand CITIZEN COB for uniform and accenting lighting. Ideal for commercial and residential applications looking for a clean, minimalist look.



Materials of Housing : Die-casting Aluminium
Materials of Optics : Aluminium

Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
CL94-3-13W	13W	Ø110x100	Ø95-100	920lm	0.38	24PCS
CL94-6-25W	25W	Ø190x127	Ø165-180	2550lm	0.85	12PCS
CL94-8-35W	35W	Ø230x140	Ø205-220	3350lm	1.20	12PCS



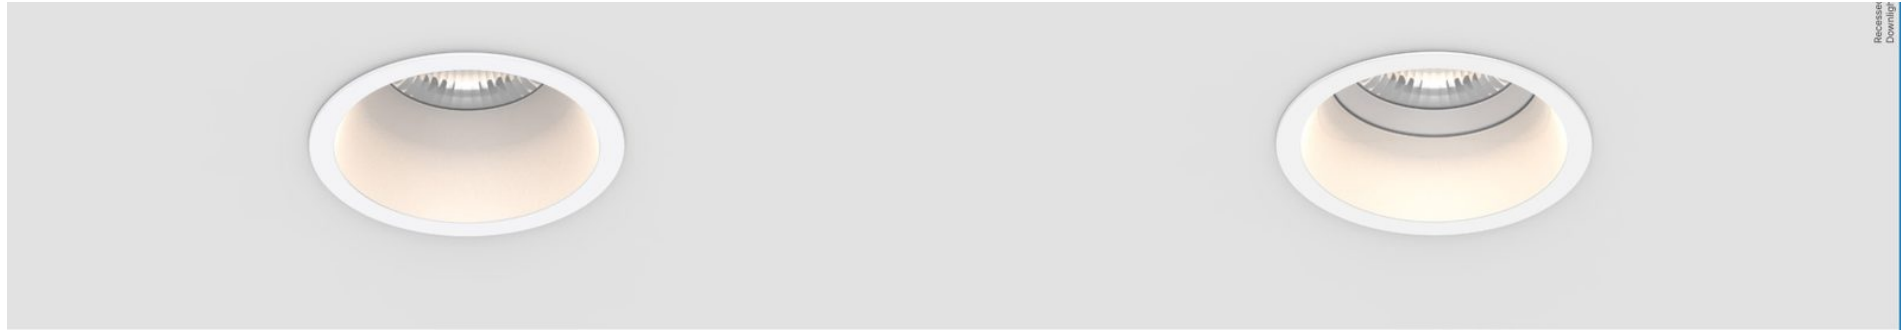

DL440 ^{NEW} Downlight



DL440 is a deep reflector and narrow trim design fixed COB downlight with high CRI90 and low glare UGR<18. Various beam angle options: 24°/36°/60°. External driver design with Triac dim, 0-10V, DALI dim available.

Materials of Housing : Aluminium

Materials of Optics : PC



Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL440-3-10W	10W	Ø110x90	Ø90-100	1110lm	0.41	24PCS
DL440-4-13W	13W	Ø150x120	Ø130-140	1400lm	0.76	12PCS
DL440-4-18W	18W	Ø150x120	Ø130-140	1960lm	0.76	12PCS
DL440-6-18W	18W	Ø190x149	Ø170-180	1950lm	1.20	4PCS
DL440-6-25W	25W	Ø190x149	Ø170-180	2770lm	1.20	4PCS
DL440-6-35W	35W	Ø190x149	Ø170-180	3630lm	1.20	4PCS
DL440-8-18W	18W	Ø220x149	Ø200-210	2010lm	1.39	4PCS
DL440-8-25W	25W	Ø220x149	Ø200-210	2850lm	1.39	4PCS
DL440-8-35W	35W	Ø220x149	Ø200-210	3640lm	1.39	4PCS
DL440-8-40W	40W	Ø220x149	Ø200-210	3880lm	1.39	4PCS

CCT — 3000K — 4000K — 5700K

Trim — Black


CL440 ^{NEW} Downlight



CL440 is a deep reflector and narrow trim design COB downlight with high CRI90 and low glare UGR<18. 15 degree adjustable in vertical direction. Various beam angle options 24°/36°/60°. External driver design with Triac dim, 0-10V, DALI dim available.

Materials of Housing : Aluminium

Materials of Optics : PC



Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
CL440-3-10W	10W	Ø110x90	Ø90-100	1000lm	0.41	24PCS
CL440-4-13W	13W	Ø150x120	Ø130-140	1400lm	0.76	12PCS
CL440-4-18W	18W	Ø150x120	Ø130-140	1930lm	0.76	12PCS
CL440-6-18W	18W	Ø190x149	Ø170-180	1980lm	1.20	4PCS
CL440-6-25W	25W	Ø190x149	Ø170-180	2740lm	1.20	4PCS
CL440-6-35W	35W	Ø190x149	Ø170-180	3630lm	1.20	4PCS

CCT — 3000K — 4000K — 5700K

Trim — Black



DL361 Downlight



DL361 Led downlight is a deep reflector design, it has a wider shielding angle which can lower the glare and reach UGR<19. Adopt bridgelux brand COB light source, CRI>90 for a more real lighting effect. Transparent tempered glass provides great light transmittance.

Materials of Housing : Die-casting Aluminium

Materials of Optics : Aluminium + PC




Code	Watt	Size(AxHmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL361-2.5-7W	7W	Ø85xH56	Ø68-75	630lm	0.20	48PCS
DL361-3-10W	10W	Ø110xH75	Ø90-100	1100lm	0.30	48PCS
DL361-4-13W	13W	Ø150xH97	Ø120-130	1400lm	0.44	24PCS
DL361-4-18W	18W	Ø150xH97	Ø120-130	1770lm	0.44	24PCS
DL361-5-18W	18W	Ø170xH112	Ø140-150	2020lm	0.61	24PCS
DL361-5-25W	25W	Ø170xH112	Ø140-150	2700lm	0.61	24PCS
DL361-6-18W	18W	Ø190xH120	Ø160-170	2020lm	0.70	12PCS
DL361-6-25W	25W	Ø190xH120	Ø160-170	2700lm	0.70	12PCS
DL361-6-30W	30W	Ø190xH120	Ø160-170	3000lm	0.70	12PCS
DL361-8-18W	18W	Ø240xH142	Ø195-230	2020lm	0.93	6PCS
DL361-8-25W	25W	Ø240xH142	Ø195-230	2700lm	0.93	6PCS
DL361-8-35W	35W	Ø240xH142	Ø195-230	3400lm	0.93	6PCS
DL361-8-40W	40W	Ø240xH142	Ø195-230	4080lm	0.93	6PCS

CCT — 2700K — 3000K — 4000K

Trim — White — Black



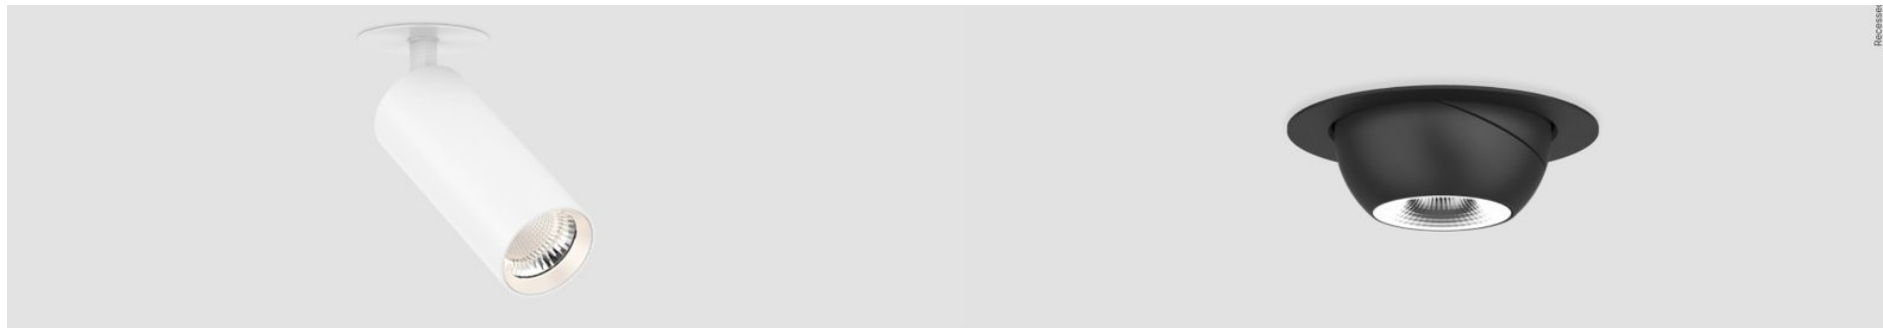

DL338 Downlight



DL338 is a DIY modular series with an exquisite appearance and anti-glare UGR19 design, 6 kinds of installation ways, 3 reflectors and 3 front ring colors can be exchangeable. It adopts brand Bridgelux COB led chip with 120lm/W light efficiency. Four size options: Ø55mm, Ø65mm, Ø85mm, Ø100mm. It can do triac dim, DALI dim, CCT interchangeable and wattage adjustable.

Materials of Housing : Aluminium

Materials of Optics : Aluminium+transparent tempered glass



Code	Watt	Size(Ax8mm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL338-55-6W	6W	Ø55x215	90-95	750lm	0.51	12PCS
DL338-55-10W	10W	Ø55x215	90-95	1200lm	0.51	12PCS
DL338-65-10W	10W	Ø65x235	90-95	1200lm	0.62	12PCS
DL338-65-15W	15W	Ø65x235	90-95	1750lm	0.62	12PCS
DL338-85-20W	20W	Ø85x274	90-95	2550lm	1.08	12PCS
DL338-85-25W	25W	Ø85x274	90-95	3150lm	1.08	12PCS
DL338-100-30W	30W	Ø100x288	90-95	3650lm	1.17	12PCS
DL338-100-35W	35W	Ø100x288	90-95	4100lm	1.17	12PCS



DL322B Downlight



DL322B adopts high lumen COB chip. The type B is recessed installation. ADC12 aluminum lamp body provides excellent heat dissipation. 340degree rotatory and lighting direction is 40 degree adjustable.


Materials of Housing : Die-casting Aluminium

Materials of Optics : PC



Code	Watt	Size(Ax8mm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL322B-12W	12W	Ø172x100	Ø150-160	1400lm	1.13	12PCS
DL322B-16W	16W	Ø172x100	Ø150-160	1800lm	1.13	12PCS
DL322B-20W	20W	Ø172x100	Ø150-160	2100lm	1.13	12PCS



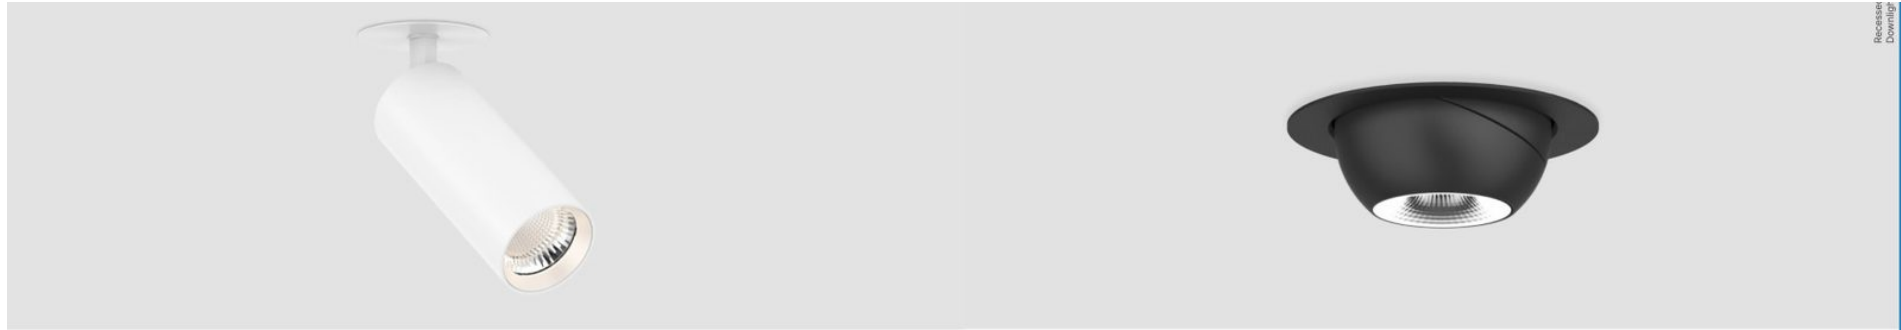

DL338 Downlight



DL338 is a DIY modular series with an exquisite appearance and anti-glare UGR19 design, 6 kinds of installation ways, 3 reflectors and 3 front ring colors can be exchangeable. It adopts brand Bridgelux COB led chip with 120lm/W light efficiency. Four size options: Ø55mm, Ø65mm, Ø85mm, Ø100mm. It can do triac dim, DALI dim, CCT interchangeable and wattage adjustable.

Materials of Housing : Aluminium


Materials of Optics : Aluminium+transparent tempered glass



Code	Watt	Size(Ax8mm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL338-55-6W	6W	Ø55x215	90-95	750lm	0.51	12PCS
DL338-55-10W	10W	Ø55x215	90-95	1200lm	0.51	12PCS
DL338-65-10W	10W	Ø65x235	90-95	1200lm	0.62	12PCS
DL338-65-15W	15W	Ø65x235	90-95	1750lm	0.62	12PCS
DL338-85-20W	20W	Ø85x274	90-95	2550lm	1.08	12PCS
DL338-85-25W	25W	Ø85x274	90-95	3150lm	1.08	12PCS
DL338-100-30W	30W	Ø100x288	90-95	3650lm	1.17	12PCS
DL338-100-35W	35W	Ø100x288	90-95	4100lm	1.17	12PCS



DL322B Downlight



DL322B adopts high lumen COB chip. The type B is recessed installation. ADC12 aluminum lamp body provides excellent heat dissipation. 340degree rotatory and lighting direction is 40 degree adjustable.


Materials of Housing : Die-casting Aluminium

Materials of Optics : PC



Code	Watt	Size(Ax8mm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL322B-12W	12W	Ø172x100	Ø150-160	1400lm	1.13	12PCS
DL322B-16W	16W	Ø172x100	Ø150-160	1800lm	1.13	12PCS
DL322B-20W	20W	Ø172x100	Ø150-160	2100lm	1.13	12PCS



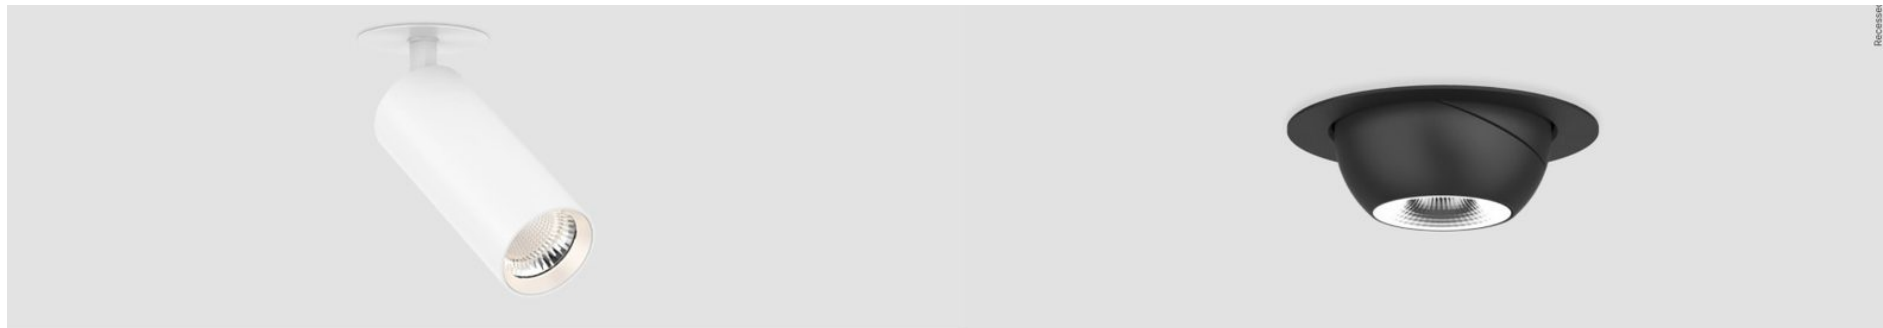

DL338 Downlight



DL338 is a DIY modular series with an exquisite appearance and anti-glare UGR19 design, 6 kinds of installation ways, 3 reflectors and 3 front ring colors can be exchangeable. It adopts brand Bridgelux COB led chip with 120lm/W light efficiency. Four size options: Ø55mm, Ø65mm, Ø85mm, Ø100mm. It can do triac dim, DALI dim, CCT interchangeable and wattage adjustable.

Materials of Housing : Aluminium


Materials of Optics : Aluminium+transparent tempered glass



Code	Watt	Size(Ax8mm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL338-55-6W	6W	Ø55x215	90-95	750lm	0.51	12PCS
DL338-55-10W	10W	Ø55x215	90-95	1200lm	0.51	12PCS
DL338-65-10W	10W	Ø65x235	90-95	1200lm	0.62	12PCS
DL338-65-15W	15W	Ø65x235	90-95	1750lm	0.62	12PCS
DL338-85-20W	20W	Ø85x274	90-95	2550lm	1.08	12PCS
DL338-85-25W	25W	Ø85x274	90-95	3150lm	1.08	12PCS
DL338-100-30W	30W	Ø100x288	90-95	3650lm	1.17	12PCS
DL338-100-35W	35W	Ø100x288	90-95	4100lm	1.17	12PCS



DL322B Downlight



DL322B adopts high lumen COB chip. The type B is recessed installation. ADC12 aluminum lamp body provides excellent heat dissipation. 340degree rotatory and lighting direction is 40 degree adjustable.


Materials of Housing : Die-casting Aluminium

Materials of Optics : PC




Code	Watt	Size(Ax8mm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL322B-12W	12W	Ø172x100	Ø150-160	1400lm	1.13	12PCS
DL322B-16W	16W	Ø172x100	Ø150-160	1800lm	1.13	12PCS
DL322B-20W	20W	Ø172x100	Ø150-160	2100lm	1.13	12PCS



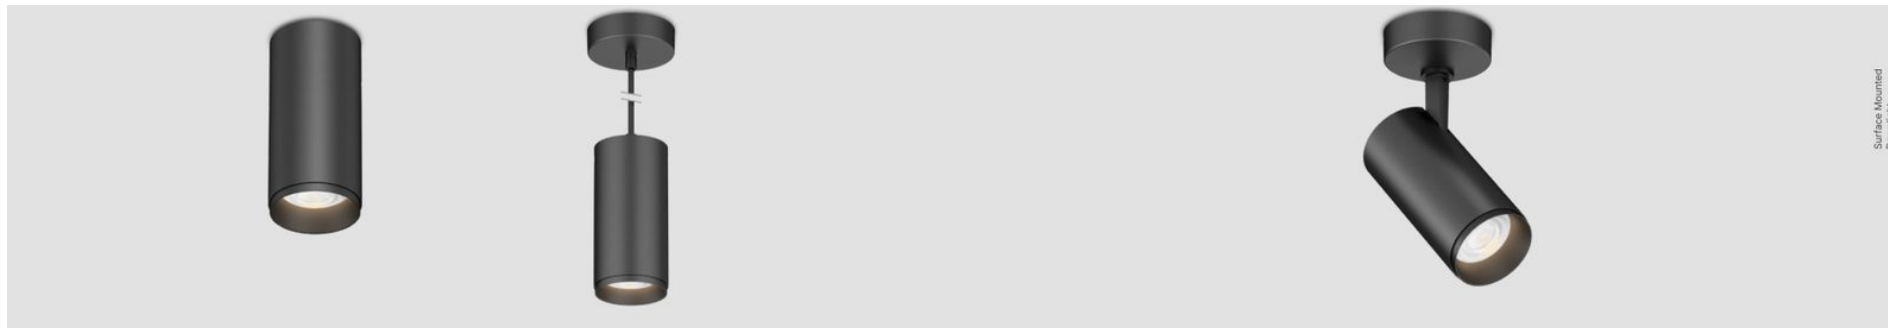

Surface Mounted Downlight

DL228A Downlight



DL228A adopt high lumen COB chip with uniform light effect and enhanced glare control. It offers a wide choice of beam angles 24°/36°/60° for optional. PD228 is suspended version.

Materials of Housing : Aluminium

Materials of Optics : PMMA




Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL228A-10W	10W	Ø65x157	1100lm	0.45	12PCS
DL228A-15W	15W	Ø65x157 (Non-dim) Ø85x178 (Triac-dim)	1650lm	0.45	12PCS
DL228A-20W	20W	Ø85x178	2250lm	0.67	12PCS
DL228A-25W	25W	Ø85x178	2700lm	0.67	12PCS
DL228A-30W	30W	Ø100x211	3050lm	1.00	12PCS
DL228A-40W	40W	Ø100x211	4200lm	1.00	12PCS
PD228-10W	10W	Ø65x157	1100lm	0.55	12PCS
PD228-15W	15W	Ø65x157 (Non-dim) Ø85x178 (Triac-dim)	1650lm	0.55	12PCS
PD228-20W	20W	Ø85x178	2250lm	0.80	12PCS
PD228-25W	25W	Ø85x178	2700lm	0.80	12PCS
PD228-30W	30W	Ø100x211	3050lm	1.15	12PCS
PD228-40W	40W	Ø100x211	4200lm	1.15	12PCS

CCT — 2700K — 3000K — 4000K Finish — White — Black

Interchangeable lens options — 24°/30°/45° for 10W/15W — 24°/36°/60° for 15W/20W/25W/30W/40W

DL228B

Downlight



DL228B surface mounted downlight with adjustable lighting orientation, 350° rotate and 90° tilt, it offers a wide choice of beam angles 24°/36°/60° for optional. Driver built-in easy for installation.

Materials of Housing : Aluminium


Materials of Optics : PMMA



Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL228B-10W	10W	Ø65x218	1100lm	0.55	12PCS
DL228B-15W	15W	Ø65x218 (Non-dim) Ø85x241 (Triac-dim)	1650lm	0.55	12PCS
DL228B-20W	20W	Ø85x241	2250lm	0.82	12PCS
DL228B-25W	25W	Ø85x241	2700lm	0.82	12PCS
DL228B-30W	30W	Ø100x274	3050lm	1.15	12PCS
DL228B-40W	40W	Ø100x274	4200lm	1.15	12PCS

CCT — 2700K — 3000K — 4000K Finish — White — Black

Interchangeable lens options — 24°/30°/45° for 10W/15W — 24°/36°/60° for 15W/20W/25W/30W/40W

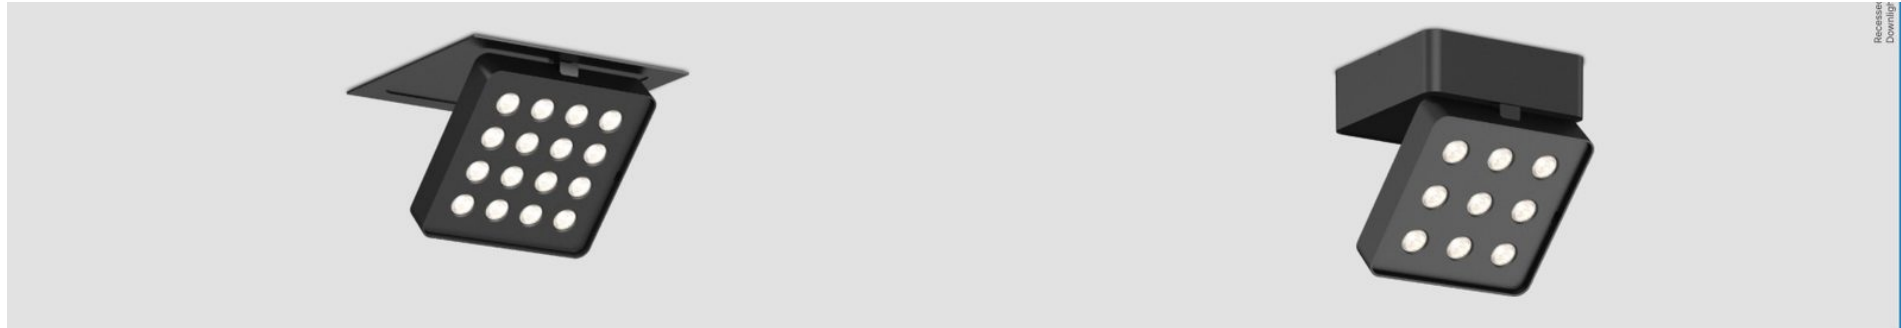

DL438B NEW Downlight



DL438B is made for interior with 2 forms - a 9-grid and a 16-grid. It's honeycomb louver and polarizing film optical accessories available as options. The lamp head can rotate 350° horizontally and adjust 90° vertically for light distribution. The system enables the fixture mounting to adapt to the specific requirements of the project, with recessed, track, surface and wall mounting options. It is widely applicable for various commercial lighting scenarios.

Materials of Housing : Aluminium
Materials of Optics : Lens/PMMA




Code	Watt	Size(AxBxCmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL438B-127-15W	15W	170x170x74	140x140	1670lm	0.72	12PCS
DL438B-127-20W	20W	170x170x74	140x140	2220lm	0.72	12PCS
DL438B-145-25W	15W	185x185x74	155x155	2700lm	0.90	6PCS
DL438B-145-28W	20W	185x185x74	155x155	3100lm	0.90	6PCS

CCT — 3000K — 4000K — 5700K

Trim — Black

DL438A NEW Downlight



DL438A is made for interior with 2 forms - a 9-grid and a 16-grid. It's honeycomb louver and polarizing film optical accessories available as options. The lamp head can rotate 350° horizontally and adjust 90° vertically for light distribution. The system enables the fixture mounting to adapt to the specific requirements of the project, with recessed, track, surface and wall mounting options. It is widely applicable for various commercial lighting scenarios.

Materials of Housing : Aluminium
Materials of Optics : Lens/PMMA



Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL438A-127-15W	15W	127x127x72	1670lm	0.75	12PCS
DL438A-127-20W	20W	127x127x72	2220lm	0.75	12PCS
DL438A-145-25W	25W	145x145x72	2700lm	0.93	6PCS
DL438A-145-28W	28W	145x145x72	3100lm	0.93	6PCS

CCT — 3000K — 4000K — 5700K


Trim — Black




DL130

SURFACE MOUNTED

LED COB | Internal driver
Die-casting Aluminium | PMMA



DL130-90-6W
DL130-90-10W



DL130-115-20W

Beam Angle	
24°	36°
Light Source	
CRI≥80	CRI≥90
2700K	3000K
Gear	
ON/OFF	DIM
Certification	
SAA	RoHS


Code	Voltage	Watt	Lumen(±5%)	Class
DL130-90-6W	AC100-240V	6W	630lm	I
DL130-90-10W	AC100-240V	10W	1030lm	I
DL130-115-20W	AC100-240V	20W	2350lm	I



DL387

SURFACE MOUNTED

LED COB | Internal driver
Aluminium | PC/ PMMA



DL387-90-8W




Beam Angle	
70°	
Light Source	
CRI≥80	SDCM<6
2700K	3000K
Gear	
ON/OFF	DIM
Certification	
SAA	RoHS

Code	Voltage	Watt	Lumen(±5%)	Class
DL387-90-8W	AC220-240V	8W	1050lm	II



Accessories	
ACC-DL387-90-WT	ACC-DL387-90-BK
Certification	
SAA	RoHS

Surface Mounted
& Pendant





DL379C

SURFACE MOUNTED | LED SMD | Internal driver
Die-casting Aluminium +PC | PC



DL379C-95-8W
DL379C-95-14W



DL379C-185-14W
DL379C-185-28W

Beam Angle

★100°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF DIM DALI Flicker Free PF≥0.9



Certification

SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
DL379C-95-8W	AC220-240V	8W	950lm	I
DL379C-95-14W	AC220-240V	14W	1600lm	I
DL379C-185-14W	AC220-240V	14W	1650lm	I
DL379C-185-28W	AC220-240V	28W	3500lm	I




DL379A

SURFACE MOUNTED | LED COB | Internal driver
Die-casting Aluminium +PC | PC



DL379A-95-8W
DL379A-95-14W



DL379A-185-14W
DL379A-185-28W

Beam Angle

★30° ★40°

Light Source

CRI≥80 SDCM<3

2700K 3000K 4000K

Gear

ON/OFF DIM DALI Flicker Free PF≥0.9




Certification

SAA RoHS CE


Code	Voltage	Watt	Lumen(±5%)	Class
DL379A-95-8W	AC220-240V	8W	950lm	I
DL379A-95-14W	AC220-240V	14W	1600lm	I
DL379A-185-14W	AC220-240V	14W	1650lm	I
DL379A-185-28W	AC220-240V	28W	3500lm	I

Recessed Panel Light

10 TECHNICAL DATASHEETS

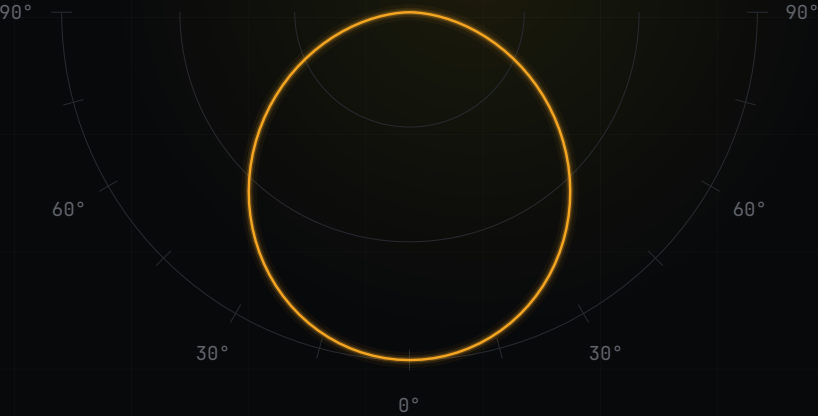

PL-CK5 Backlit panel light



PL-CK5 series is slim design backlit panel just 25mm thickness. It makes full use of all light and is more cost effective compared with side lighting LED panel light. It is adopted high lumen 2835 SMD light source, the optical lens provides a uniform light output.

Materials of Housing : Aluminium, SPCC


Materials of Optics : PMMA(Lens)+PS(Diffuser)



Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PL6060-36W-CK5	36W	595x595x25	570x570	100lm/W (90lm/W UGR<19)	1.82	5PCS/6PCS
PL6262-36W-CK5	36W	620x620x25	590x590	100lm/W (90lm/W UGR<19)	1.91	5PCS/6PCS
PL30120-36W-CK5	36W	1195x295x25	1170x270	100lm/W (90lm/W UGR<19)	1.86	5PCS/6PCS
PL6060-36W-CK5	36W	595x595x25	570x570	120lm/W (110lm/W UGR<19)	1.82	5PCS/6PCS
PL6262-36W-CK5	36W	620x620x25	590x590	120lm/W (110lm/W UGR<19)	1.91	5PCS/6PCS
PL30120-36W-CK5	36W	1195x295x25	1170x270	120lm/W (110lm/W UGR<19)	1.86	5PCS/6PCS
PL6060-30W-CK5	30W	595x595x25	570x570	140lm/W (130lm/W UGR<19)	1.82	5PCS/6PCS
PL6262-30W-CK5	30W	620x620x25	590x590	140lm/W (130lm/W UGR<19)	1.91	5PCS/6PCS
PL30120-30W-CK5	30W	1195x295x25	1170x270	140lm/W (130lm/W UGR<19)	1.86	5PCS/6PCS
PL6060-20W-CK5	20W	595x595x25	570x570	180lm/W (160lm/W UGR<19)	1.82	5PCS/6PCS
PL6262-20W-CK5	20W	620x620x25	590x590	180lm/W (160lm/W UGR<19)	1.91	5PCS/6PCS
PL30120-20W-CK5	20W	1195x295x25	1170x270	180lm/W (160lm/W UGR<19)	1.86	5PCS/6PCS
PL6060-20W-CK5	20W	595x595x25	570x570	4260lm (200lm/W)	8.40	6PCS
PL6262-20W-CK5	20W	620x620x25	590x590	4260lm (200lm/W)	9.70	6PCS
PL30120-20W-CK5	20W	1195x295x25	1170x270	4260lm (200lm/W)	9.60	6PCS
PL60120-40W-CK5	40W	1195x595x25	1170x570	7800lm (200lm/W)	13.1	4PCS

CCT — 3000K — 4000K — 5700K

Finish — White

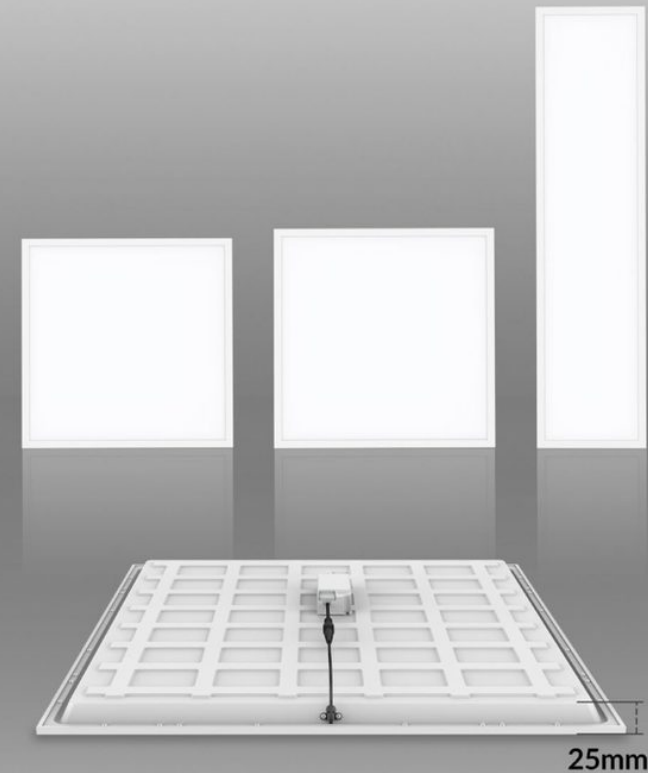


PL-CK5
SUPER SLIM BACKLIT PANEL

LED Panel & Troffer
& Office Lighting

LED Panel & Troffer
& Office Lighting

PL008 Panel light



PL008 panel light is direct lighting with reflector design, reflector available with multiple colors, white, bright silver, matt silver, and black. Great optics design with SMD, reach low glare UGR<19 and high lumen efficiency up to 140lm/W, single CCT and 3CCT available. External driver available with on/ off, triac, DALI and 0-10V.

Reflector




Materials of Housing : SPCC

Materials of Optics : PC


Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PL008-3060-15W	15W	295x595x31.5	570x270	1800lm	1.47	5PCS
PL008-6060-30W	30W	595x595x31.5	570x570	3600lm	2.70	5PCS
PL008-6262-30W	30W	620x620x31.5	595x595	3600lm	2.90	5PCS
PL008-30120-30W	30W	295x1195x31.5	1170x270	3600lm	2.74	5PCS
PL008-60120-55W	55W	595x1195x31.5	1170x570	6700lm	5.28	2PCS
PL008-3060-12W	12W	295x595x31.5	570x270	1700lm	1.47	5PCS
PL008-6060-25W	25W	595x595x31.5	570x570	3550lm	2.70	5PCS
PL008-6262-25W	25W	620x620x31.5	595x595	3550lm	2.90	5PCS
PL008-30120-25W	25W	295x1195x31.5	1170x270	3550lm	2.74	5PCS
PL008-60120-40W	40W	595x1195x31.5	1170x570	5700lm	5.28	2PCS

CCT — 3000K — 4000K — 5700K — Finish — White

Installation accessories — Suspension kit (Customized length)



PL18 ^{NEW} Panel light



PL18 panel light is modular design easy to replacement, high lumen efficiency, 120lm/w@30W and 140lm/w@25W, louver reflectors design makes UGR<16, multiple installation: recessed, suspended, surface mounted and triac, 0-10V, DALI for option.

Materials of Housing : SPCC

Materials of Optics : PC+PET

Code	Watt	Size(AxBxCmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PL18-6060-25W	25W	595x595x31	570x570	3890lm	2.63	5PCS
PL18-6060-30W	30W	595x595x31	570x570	3795lm	2.63	5PCS
PL18-30120-25W	30W	295x1195x25	270x1170	3625lm	2.61	5PCS
PL18-30120-30W	30W	295x1195x25	270x1170	3830lm	2.61	5PCS

CCT — 3000K — 4000K — 5700K — Finish — White

Installation accessories — Suspension kit (Customized length)



LED Panel & Troffer
& Office Lighting

PL-DB Panel light



PL-DB panel light is up & down emitting panel, novel design without any screw make it a special and good looking panel. Optics design with anti-glare UGR<19 but without Prism plate. External driver in magnetic box provides convenient installation and available with on/ off, triac, and DALI

Materials of Housing : Aluminium

Materials of Optics : PS (Diffuser) /PMMA (LGP)




Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PL30120-30W-DB	30W	1200x300x16.5	3060lm	3.76	2PCS
PL30120-40W-DB	40W	1200x300x16.5	4000lm	3.76	2PCS
PL30120-50W-DB	50W	1200x300x16.5	4950lm	3.76	2PCS

CCT — 3000K — 4000K — 5700K

Finish — White

PL-DF Panel light



PL-DF panel light is frameless, transparent and 360 degree lighting design, which provides a great visual aesthetic feeling. Optics with high lumen SMD light source, reach anti-glare UGR<19. External driver in magnetic box provides convenient installation and available with on/ off, triac, and DALI.

Materials of Housing : Aluminium

Materials of Optics : PMMA




Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PL35120-40W-DF	40W	1200x350x19	4800lm	4.50	2PCS
PL35120-40W-DF-D	40W	1200x350x19	4800lm	4.50	2PCS
PL35120-60W-DF	60W	1200x350x19	7300lm	4.50	2PCS

CCT — 3000K — 4000K — 5700K

Finish — White



PL-DD Panel light



PL-DD small round & square panel with complete diameter options. Optics with 2835SMD LED chip and PMMA LGP offer a great light transmittance and light output. External driver available with on/ off, triac, DALI and 0-10V.

Materials of Housing : Aluminium

Materials of Optics : PS(Diffuser)+PMMA(LGP)




Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PL1212-7W-DD	7W	120x120x21	105x105	580lm	0.24	36PCS
PL1515-9W-DD	9W	146x146x21	127x127	810lm	0.28	24PCS
PL1717-12W-DD	12W	171x171x21	155x155	1070lm	0.34	20PCS
PL2222-18W-DD	18W	224x224x21	205x205	1580lm	0.52	12PCS
PL3030-24W-DD	24W	300x300x21	277x277	2500lm	0.88	12PCS
PL1221-7W-DD	7W	Ø120x21	Ø108-113	580lm	0.20	36PCS
PL1521-9W-DD	9W	Ø145x21	Ø127-133	810lm	0.24	24PCS
PL1721-12W-DD	12W	Ø170x21	Ø157-162	1050lm	0.29	20PCS
PL2021-15W-DD	15W	Ø200*21	Ø177-182	1470lm	0.35	12PCS
PL2221-18W-DD	18W	Ø224x21	Ø205-212	1680lm	0.42	12PCS
PL2421-22W-DD	22W	Ø238*21	Ø224-228	2150lm	0.50	12PCS
PL3021-24W-DD	24W	Ø300x21	Ø282-288	2500lm	0.71	12PCS

CCT — 3000K — 4000K — 5700K

Finish — White

PL-W Panel light



PL-W round pendant panel light with side-lighting design. Optics with high quality diffuser and 3T PMMA LGP. 300mm, 400mm, 500mm, 600mm and 780mm diameter for options. Various installation ways with suspended, surface mounted and recessed. External driver available with on/ off, triac, DALI and 0-10V.

Materials of Housing : Aluminium


Materials of Optics : PMMA (LGP)




Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PL3012-18W-W	18W	Ø300x12	1560lm	2.50	5PCS
PL4012-25W-W	25W	Ø400x12	2070lm	3.10	4PCS
PL4012-35W-W	35W	Ø400x12	2900lm	3.10	4PCS
PL5012-30W-W	30W	Ø500x12	2520lm	4.20	4PCS
PL5012-35W-W	35W	Ø500x12	2900lm	4.20	4PCS
PL6012-35W-W	35W	Ø600x12	3040lm	4.34	2PCS
PL6012-45W-W	45W	Ø600x12	3600lm	4.34	2PCS
PL8012-60W-W	60W	Ø780x20	5430lm	6.10	2PCS
PL8012-80W-W	80W	Ø780x20	7460lm	6.90	2PCS

CCT — 3000K — 4000K — 5700K

Finish — White

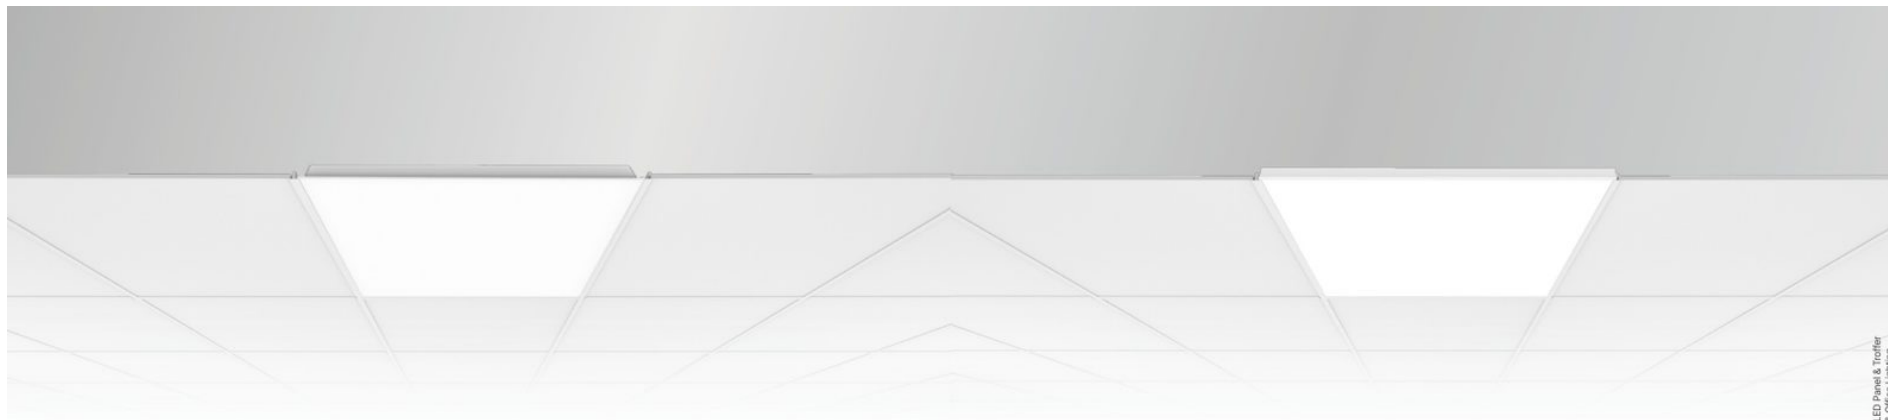LED Panel & Troffer
& Office Lighting

PL-CK2 Backlit panel light



PL-CK2 panel is a patented frameless design with larger lighting area, direct lighting way makes full use of all light. Adopt high lumen 2835 SMD light source, the optical lens provides a uniform light output. The lamps are directly provided with pendants, which is convenient for installation. 2CCT/ 3CCT adjustable by slide switch is available.

Materials of Housing : SPCC

Materials of Optics : PMMA(Lens)+PS(Diffuser)




Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PL6060-36W-CK2	36W	595x595x28	580x580	120LM/W	1.50	5PCS/6PCS
PL6262-36W-CK2	36W	620x620x28	605x605	120LM/W	1.82	5PCS/6PCS
PL30120-36W-CK2	36W	1195x295x28	1180x280	120LM/W	1.76	5PCS/6PCS
PL6060-25W-CK2	25W	595x595x28	580x580	130LM/W	1.50	5PCS/6PCS
PL6262-25W-CK2	25W	620x620x28	605x605	130LM/W	1.82	5PCS/6PCS
PL30120-25W-CK2	25W	1195x295x28	1180x280	130LM/W	1.76	5PCS/6PCS
PL6060-28W-CK2	28W	595x595x28	580x580	130LM/W	1.50	5PCS/6PCS
PL6262-28W-CK2	28W	620x620x28	605x605	130LM/W	1.82	5PCS/6PCS
PL30120-28W-CK2	28W	1195x295x28	1180x280	130LM/W	1.76	5PCS/6PCS

CCT — 3000K 4000K 5700K

Finish — White

Installation accessories — Suspension kit (Customized length)

PL-CK8 Backlit panel light



PL-CK8 panel is backlit panel with frameless design. Adopt high lumen 2835 SMD light source, CRI>80 and CRI>90 for option, CCT switch is available. Recessed, suspended and surface mounted installation ways for choice.

Materials of Housing : Aluminium, SPCC

Materials of Optics : PMMA(Lens)+PS(Diffuser)



Code	Watt	Size(AxBxCmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PL6060-CK8-36W	36W	595x595x50	570x570	4770lm	2.70	5PCS
PL30120-CK8-36W	36W	1195x295x50	1170x270	4450lm	3.20	5PCS

CCT — 3000K 4000K 5700K

Finish — White

Installation accessories — Suspension kit (Customized length)



PL-G5B Panel light



PL-G5B is 10mm thickness edgelit panel, which adopts high lumen SMD LED achieve 120lm/W, with external flickering free driver, triac dim, 0-10V dim and DALI dim available. It available with various installation ways: embedded into ceiling, suspended with hanging wires, surface mounted in a concrete ceiling by using surface mounting frame.

Materials of Housing : Aluminium

Materials of Optics : PMMA (LGP) / PS(Diffuser)




Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PL3030-10W-G5B	10W	295x295x10	280x280	1210lm	0.76	12PCS
PL3060-20W-G5B	20W	595x295x10	580x280	2530lm	1.37	6PCS
PL6060-28W-G5B	28W	595x595x10	580x580	3696lm	2.60	5PCS
PL6060-33W-G5B	33W	595x595x10	580x580	4356lm	2.60	5PCS
PL6262-28W-G5B	28W	620x620x10	605x605	3696lm	2.80	2PCS
PL6262-33W-G5B	33W	620x620x10	605x605	4356lm	2.80	2PCS
PL30120-28W-G5B	28W	1195x295x10	1180x280	3696lm	2.67	5PCS
PL30120-33W-G5B	33W	1195x295x10	1180x280	4356lm	2.67	5PCS
PL60120-50W-G5B	50W	1195x595x10	1180x580	6600lm	5.23	2PCS

CCT — 3000K — 4000K — 5700K

Installation accessories — Suspension kit (Customized length)

Finish — White

PL-G6B Panel light



PL-G6B is UGR<19 10mm thickness edgelit panel, which adopts high lumen SMD LED achieve 120lm/W, with external flickering free driver, triac dim, 0-10V dim and DALI dim available. It available with various installation ways: embedded into ceiling, suspended with hanging wires, surface mounted in a concrete ceiling by using surface mounting frame.

Materials of Housing : Aluminium

Materials of Optics : PMMA (LGP) / PS(Diffuser)



Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PL3030-10W-G6B	10W	295x295x10	280x280	1210lm	0.76	12PCS
PL3060-20W-G6B	20W	595x295x10	580x280	2530lm	1.37	6PCS
PL6060-28W-G6B	28W	595x595x10	580x580	3696lm	2.60	5PCS
PL6060-33W-G6B	33W	595x595x10	580x580	4356lm	2.60	5PCS
PL6262-28W-G6B	28W	620x620x10	605x605	3696lm	2.80	5PCS
PL6262-33W-G6B	33W	620x620x10	605x605	4356lm	2.80	5PCS
PL30120-28W-G6B	28W	1195x295x10	1180x280	3696lm	2.67	5PCS
PL30120-33W-G6B	33W	1195x295x10	1180x280	4356lm	2.67	5PCS
PL60120-50W-G6B	50W	1195x595x10	1180x580	6600lm	5.23	2PCS

CCT — 3000K — 4000K — 5700K

Installation accessories — Suspension kit (Customized length)

Finish — White




PL006 Panel light



PL006 side-lit panel light is a ODM case with tuya IOT provider, share the same UI as tuya, available with PIR sensor, photo sensor, and tuya smart control with on/off, dimming, CCT adjustable, time setting, records, voice control, master-slave control. Optics designed with SMD LED and prismatic diffuser to reach UGR<19. Clean backside with one external driver only.

Materials of Housing : Aluminium

Materials of Optics : PMMA



Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PL006-6060-40W-WBS-I01	40W	595x595x8.5	4000lm	3.10	4PCS
PL006-6262-40W-WBS-I01	40W	620x620x8.5	4000lm	3.50	4PCS
PL006-30120-40W-WBS-I01	40W	1195x295x8.5	4000lm	3.10	4PCS

CCT — 2700K — 3000K — 6500K

Installation accessories




Suspension kit
(Customized length)

Finish — White


WIFI+Bluetooth

Smart Dual Protocol Panel **PL006-WBS-I01** Series

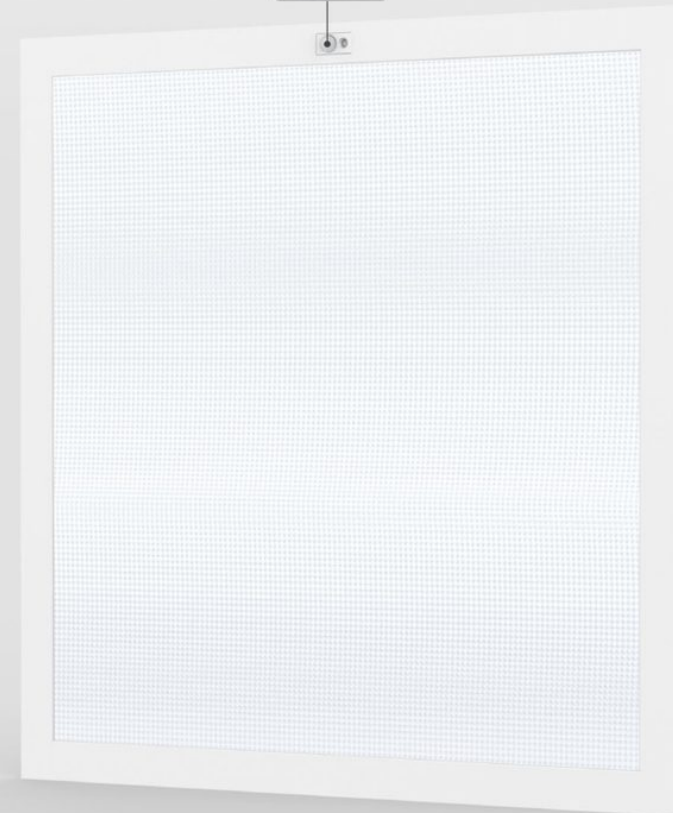



PL-DE Panel light



PL-DE panel light is direct lighting with modular design, prismatic diffuser and louver reflector replaceable, air-slot design and non-air slot design optional. Great optics design with SMD, reach low glare UGR<19. External driver available with on/ off, triac, DALI and 0-10V.

Materials of Housing : SPCC
Materials of Optics : PS/PC+Aluminium

90°

IP20

UGR<19

DIM

DALI

0-10V

AC 220-240V

PF≥0.9

CRI≥90

SAA

RoHS

CE


Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PL3060-13W-DE	13W	292x592x48	282x582	1495lm	2.10	4PCS
PL6060-28W-DE	28W	1192x292x48	582x582	3360lm	4.10	4PCS
PL30120-28W-DE	28W	1192x392x48	282x1182	3360lm	3.84	4PCS
PL40120-28W-DE	28W	592x592x48	382x1182	3360lm	4.30	4PCS
PL30150-40W-DE	40W	1492x292x48	282x1482	4800lm	4.86	4PCS

CCT

3000K4000K5700K

Finish

White

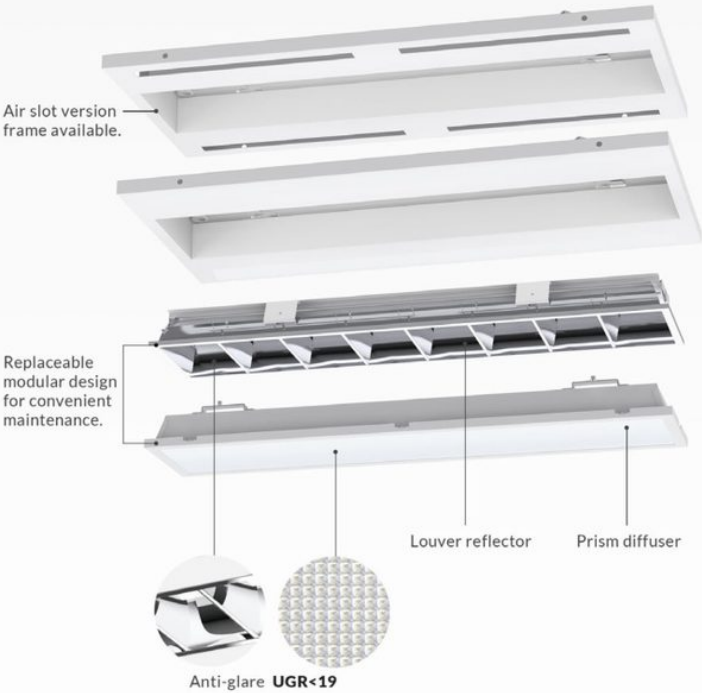

LED Panel & Troffer & Office Lighting

PL-DE
MODULAR DESIGN LED PANEL

Replaceable modular design for convenient maintenance



PL-EA Panel light



PL-EA large size panel with simple and elegant design. Optics with CRI≥90 SMD LED and secondary light distribution design, reach UGR<19, fireproof B1 grade soft film as luminous cover and 0.5mm thickness backboard make this panel looks very reliable. External driver available with DALI and 0-10V.

Materials of Housing : Aluminium
Materials of Optics : PVC Soft film

Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PL120120-60W-EA	60W	1200x1200x110	4800lm	11	1PCS
PL120240-120W-EA	120W	1200x2400x110	9600lm	21	1PCS
PL120300-180W-EA	180W	1200x3000x110	14400lm	27	1PCS
PL150150-80W-EA	80W	1500x1500x110	6400lm	17	1PCS
PL150300-240W-EA	240W	1500x3000x110	19200lm	34	1PCS

CCT

3000K

4000K

5700K

Installation accessories

Suspension kit
(Customized length)

Surface mounted kit

Finish

Black



PL-CK003 Backlit Panel light



PL-CK003 is an IP65 rating panel light with backlit lighting structure, with external IP65 driver, the whole lamp satisfy IP65. It adopts PMMA optical lens and high lumen SMD, give uniform light output and avoid yellow risky. The panel equipped with a waterproof and breathable valve to balance the pressure inside and outside.

Materials of Housing : Aluminium+SPCC

Materials of Optics : PMMA(Lens)+PS(Diffuser)



Code	Watt	Size(AxBxCmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PL-CK003-6060-36W	36W	595x595x27	Ø570x570	3680lm	1.82	5PCS
PL-CK003-30120-36W	36W	295x1195x27	Ø270x1170	3600lm	2.02	5PCS

CCT — 3000K 4000K 5700K

Installation accessories — Suspension kit (Customized length)

PL-DS Panel light



PL-DS panel adopts upper and lower frame structure design to reach an IP65 waterproof effect, it has a strong structure with 10mm thickness. Besides, it has high lumen SMD light source and PMMA LGP which offer a uniform light output and avoid yellow risky. External IP65 flicker free driver with waterproof DC connector UGR<19 available. Multiple installation ways: recessed, suspended and surface mounted.

Materials of Housing : Aluminium(Frame)

Materials of Optics : PMMA (LGP) / PS(Diffuser)




Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PL3030-15W-DS	15W	295x295x10	280x280	1275lm	1.05	10PCS
PL3060-20W-DS	20W	595x295x10	580x280	1800lm	1.79	5PCS
PL6060-36W-DS	36W	595x595x10	580x580	3600lm	3.16	4PCS
PL6262-36W-DS	36W	620x620x10	605x605	3600lm	3.43	4PCS
PL30120-36W-DS	36W	1195x295x10	1180x280	3600lm	3.31	4PCS
PL60120-60W-DS	60W	1195x595x10	1180x580	6300lm	6.37	2PCS
PL3030-10W-DS (UGR<19)	10W	295x295x10	280x280	950lm	1.05	10PCS
PL3060-15W-DS (UGR<19)	15W	595x295x10	580x280	1575lm	1.79	5PCS
PL6060-36W-DS (UGR<19)	36W	595x595x10	580x580	3960lm	3.16	4PCS
PL6262-36W-DS (UGR<19)	36W	620x620x10	605x605	3960lm	3.43	4PCS
PL30120-36W-DS (UGR<19)	36W	1195x295x10	1180x280	3960lm	3.31	4PCS


CCT — 3000K 4000K 5700K

Installation accessories — Suspension kit (Customized length)

Ceiling Light

10 TECHNICAL DATASHEETS

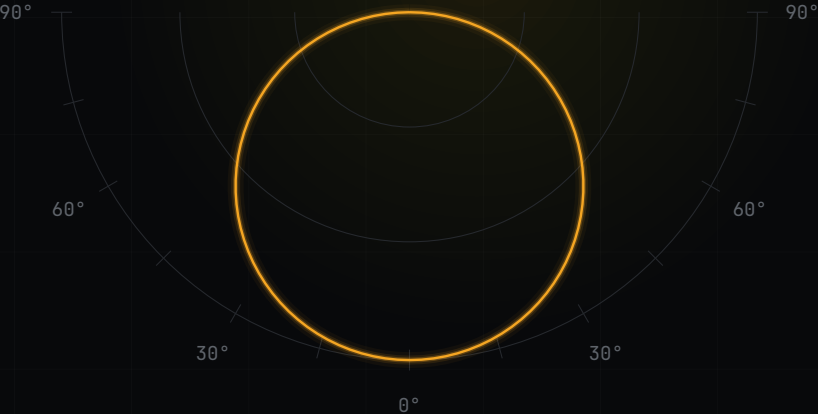

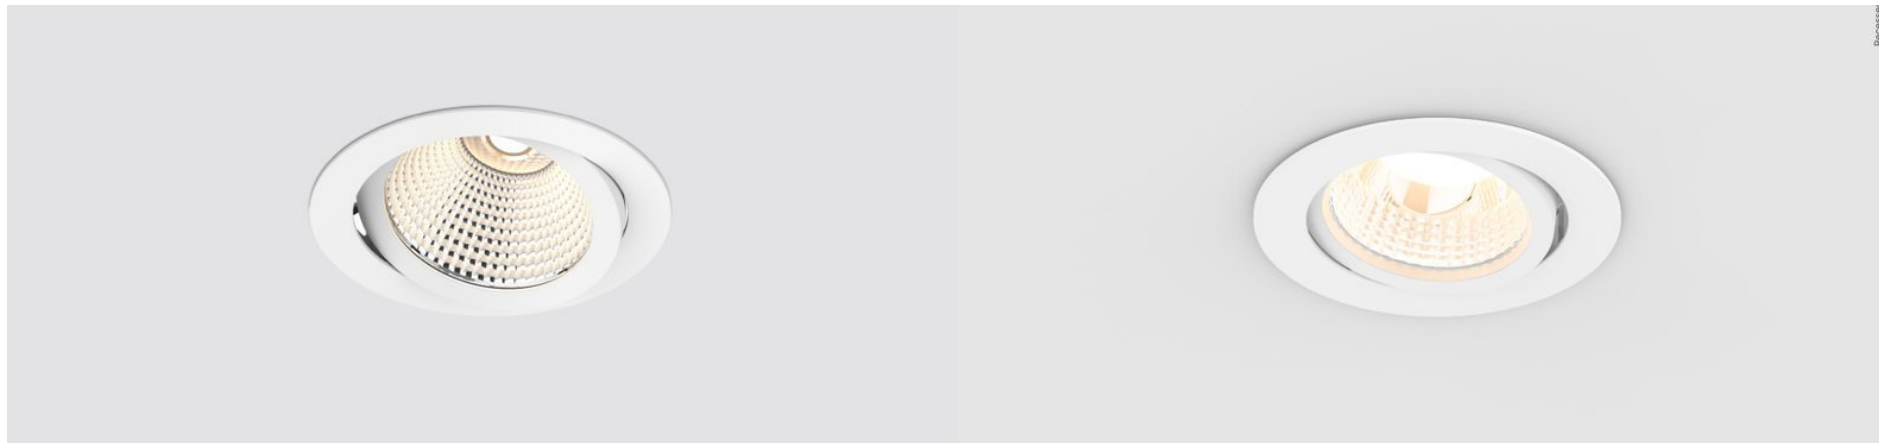

CL156 NEW Downlight



CL156 is IP20 LED downlight with COB LED. Various optical design 10°/15°/24°/36°/45°/60° and full dimensions 2.5inch, 3inch, 4inch, 6inch meet different demand.

Materials of Housing : Die-casting Aluminium

Materials of Optics : PC



Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
CL156-2.5-8W	8W	Ø80x32	Ø68-75	850lm	0.24	30PCS
CL156-3-10W	10W	Ø110x47	Ø90-95	1100lm	0.38	30PCS
CL156-3-13W	13W	Ø110x47	Ø90-95	1400lm	0.38	30PCS
CL156-4-18W	18W	Ø140x65	Ø120-130	2200lm	0.56	12PCS
CL156-4-25W	25W	Ø140x65	Ø120-130	2800lm	0.56	12PCS
CL156-6-18W	18W	Ø180x81	Ø160-170	2250lm	0.88	12PCS
CL156-6-25W	25W	Ø180x81	Ø160-170	2800lm	0.88	12PCS
CL156-6-35W	35W	Ø180x81	Ø160-170	3700lm	0.88	12PCS

CCT — 3000K — 4000K — 5700K

Trim — White — Black

CL178 NEW Downlight



CL178 is an IP54 COB downlight with a luminous efficacy up to 120lm/w. UGR<19 provides better glaring control. The external driver can be interchanged between triac dim, 0/1-10V, and DALI drivers.

Materials of Housing : Aluminium


Materials of Optics : PC



Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
CL178-3-10W	10W	Ø110x54	Ø90-95	1150lm	0.29	24PCS
CL178-3.5-10W	10W	Ø120x54	Ø100-110	1150lm	0.33	24PCS
CL178-3.5-13W	13W	Ø120x54	Ø100-110	1500lm	0.33	24PCS
CL178-3.5-15W	15W	Ø120x54	Ø100-110	1700lm	0.33	24PCS
CL178-5-13W	13W	Ø160x78	Ø140-150	1600lm	0.59	18PCS
CL178-5-18W	18W	Ø160x78	Ø140-150	2350lm	0.59	18PCS
CL178-5-25W	25W	Ø160x78	Ø140-150	3250lm	0.59	18PCS

CCT — 3000K — 4000K — 5700K

Trim — White — Black

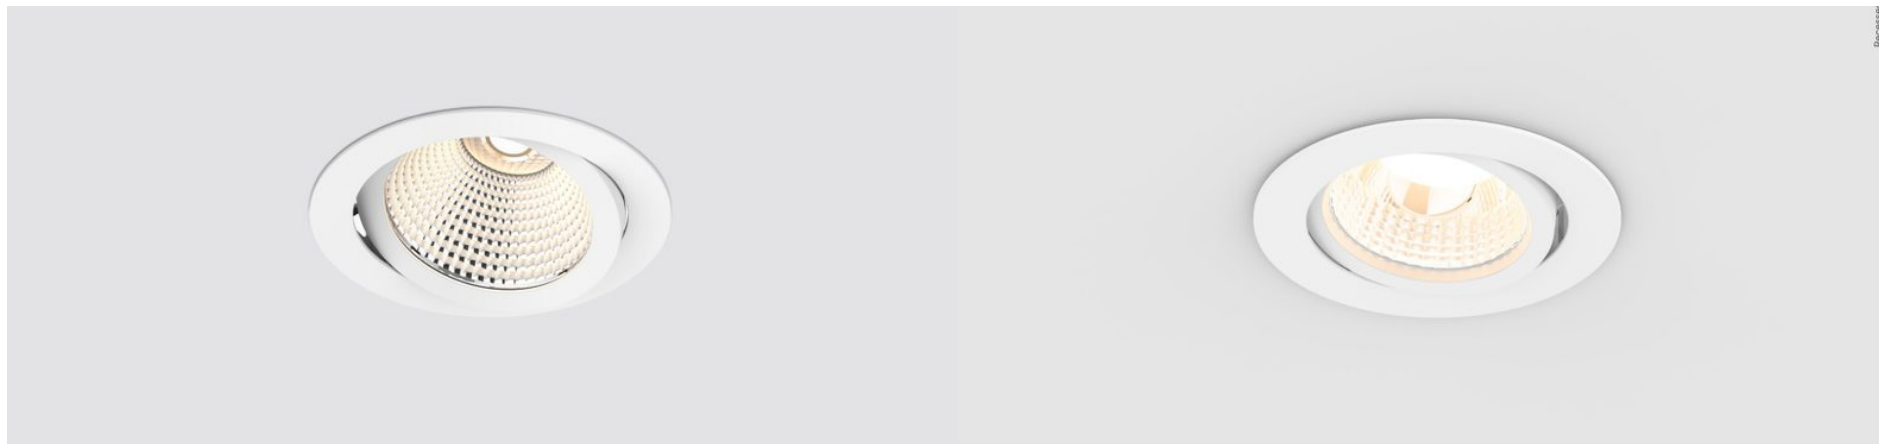

CL156 NEW Downlight



CL156 is IP20 LED downlight with COB LED. Various optical design 10°/15°/24°/36°/45°/60° and full dimensions 2.5inch, 3inch, 4inch, 6inch meet different demand.

Materials of Housing : Die-casting Aluminium

Materials of Optics : PC



Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
CL156-2.5-8W	8W	Ø80x32	Ø68-75	850lm	0.24	30PCS
CL156-3-10W	10W	Ø110x47	Ø90-95	1100lm	0.38	30PCS
CL156-3-13W	13W	Ø110x47	Ø90-95	1400lm	0.38	30PCS
CL156-4-18W	18W	Ø140x65	Ø120-130	2200lm	0.56	12PCS
CL156-4-25W	25W	Ø140x65	Ø120-130	2800lm	0.56	12PCS
CL156-6-18W	18W	Ø180x81	Ø160-170	2250lm	0.88	12PCS
CL156-6-25W	25W	Ø180x81	Ø160-170	2800lm	0.88	12PCS
CL156-6-35W	35W	Ø180x81	Ø160-170	3700lm	0.88	12PCS

CCT — 3000K — 4000K — 5700K

Trim — White — Black

CL178 NEW Downlight



CL178 is an IP54 COB downlight with a luminous efficacy up to 120lm/w. UGR<19 provides better glaring control. The external driver can be interchanged between triac dim, 0/1-10V, and DALI drivers.

Materials of Housing : Aluminium


Materials of Optics : PC



Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
CL178-3-10W	10W	Ø110x54	Ø90-95	1150lm	0.29	24PCS
CL178-3.5-10W	10W	Ø120x54	Ø100-110	1150lm	0.33	24PCS
CL178-3.5-13W	13W	Ø120x54	Ø100-110	1500lm	0.33	24PCS
CL178-3.5-15W	15W	Ø120x54	Ø100-110	1700lm	0.33	24PCS
CL178-5-13W	13W	Ø160x78	Ø140-150	1600lm	0.59	18PCS
CL178-5-18W	18W	Ø160x78	Ø140-150	2350lm	0.59	18PCS
CL178-5-25W	25W	Ø160x78	Ø140-150	3250lm	0.59	18PCS

CCT — 3000K — 4000K — 5700K

Trim — White — Black

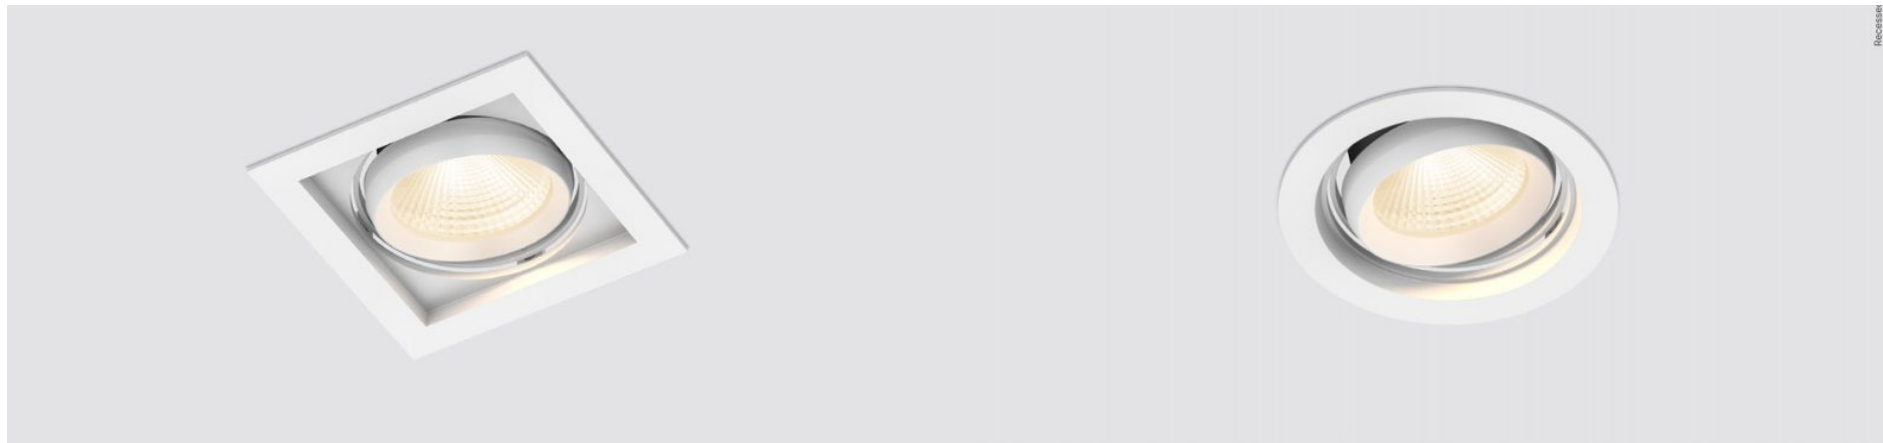

CL113A Downlight



CL113A Gimbal downlight adopts brand CITIZEN COB. Square modular design allows various DIY combinations through splicing plates. External driver is exchangeable through quick connector among non-dimmable driver, Triac dimmable, 0-10V and DALI dimmable drivers.

Materials of Housing : Aluminium
Materials of Optics : PC



Code	Watt	Size(AxBxCmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
CL113A-6-25W	25W	175x175x110	150-160	2750lm	0.83	18PCS
CL113A-6-35W	35W	175x175x110	150-160	3850lm	0.83	18PCS

CCT — 3000K — 4000K — 5700K

Trim — White — Black

CL113B Downlight



CL113B Gimbal downlight adopts brand CITIZEN COB. External driver is exchangeable through quick connector among non-dimmable driver, Triac dimmable, 0-10V and DALI dimmable drivers.


Materials of Housing : Aluminium
Materials of Optics : PC



Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
CL113B-6-25W	25W	Ø180x110	Ø150-160	2750lm	0.79	18PCS
CL113B-6-35W	35W	Ø180x110	Ø150-160	3850lm	0.79	18PCS

CCT — 2700K — 3000K — 4000K

Trim — White — Black

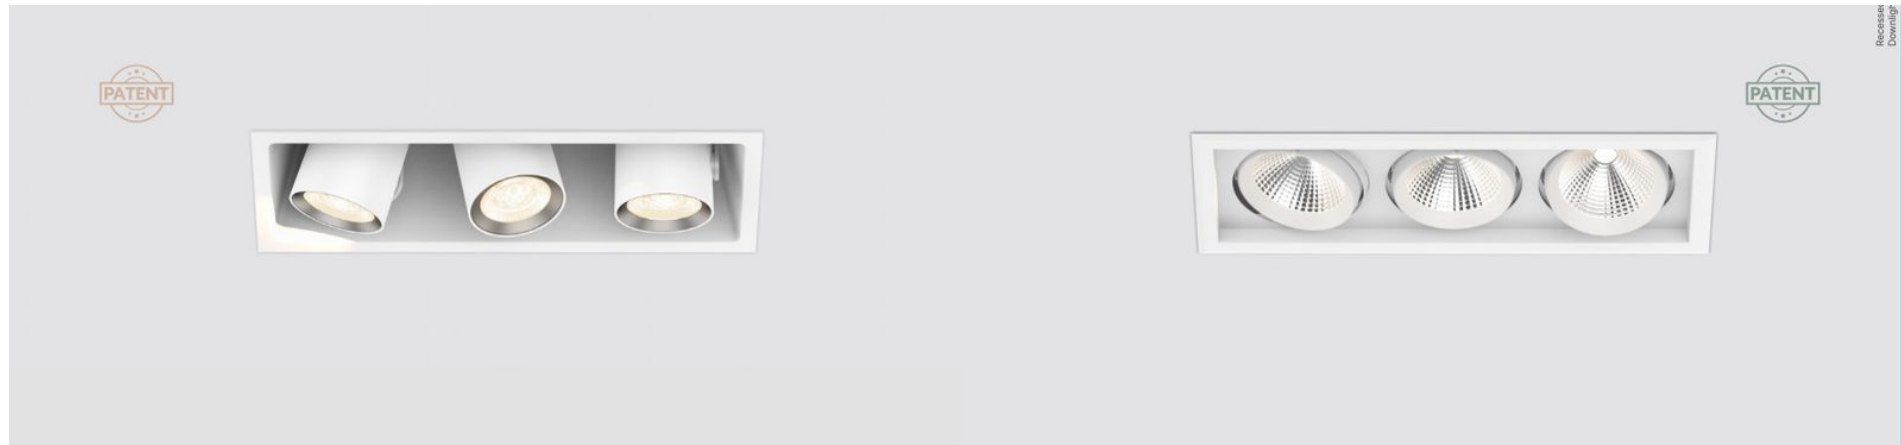

CL146 Downlight



CL146 is gyro design commercial LED downlight with single/double/triple head options. It is tiltable 45° in all directions 355°. SMD with 1CCT/ 3CCT, COB LED light source is available.

Materials of Housing : Die-casting Aluminium
Materials of Optics : PC




Code	Watt	Size(AxBxCmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
CL146A-15W(COB)	15W	125x125x88	115x115	1590lm	0.63	12PCS
CL146A-30W(COB)	30W	228x125x88	218x115	3240lm	0.95	12PCS
CL146A-45W(COB)	45W	331x125x88	321x115	4830lm	1.32	6PCS
CL146B-8W(SMD)	8W	125x125x88	115x115	770lm	0.63	12PCS
CL146B-16W(SMD)	16W	228x125x88	218x115	1480lm	0.95	12PCS
CL146B-24W(SMD)	24W	331x125x88	321x115	2400lm	1.32	6PCS

CCT — 2700K — 3000K — 4000K

Trim — White — Black

CL99 Downlight



CL99 downlight is a unique replaceable module design which makes an easier installation and maintenance. The drivers are separate and external for easy replacement. It is an ideal design for commercial lighting.


Materials of Housing : Die-casting Aluminium
Materials of Optics : PC



Code	Watt	Size(AxBxCmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
CL99-30W	1x30W	175x175x110	160-160	3500lm	1.25	12PCS
CL99-60W	2x30W	330x175x110	310-160	6700lm	2.25	6PCS
CL99-90W	3x30W	475x175x110	455-160	9870lm	3.20	6PCS
CL99-30W-C3	1x30W	175x175x110	160-160	2950lm	1.25	12PCS
CL99-60W-C3	2x30W	330x175x110	310-160	5900lm	2.25	6PCS
CL99-90W-C3	3x30W	475x175x110	455-160	8600lm	3.20	6PCS

CCT — 2700K — 3000K — 4000K

Finish — White — Black

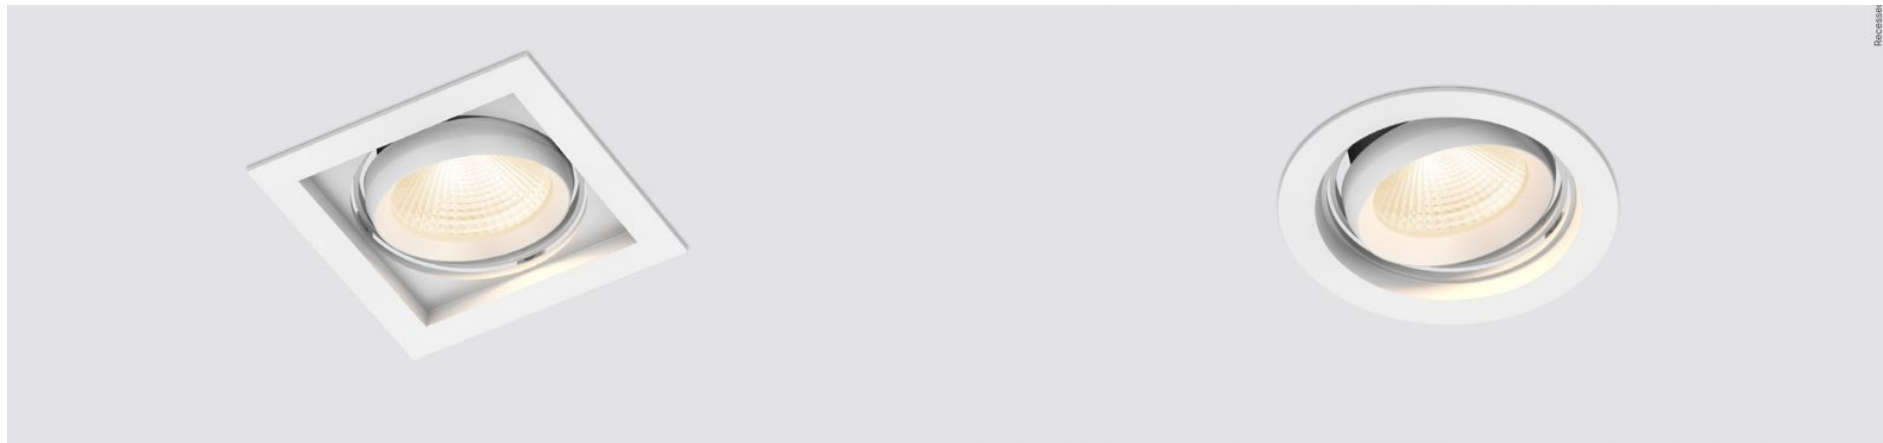

CL113A Downlight



CL113A Gimbal downlight adopts brand CITIZEN COB. Square modular design allows various DIY combinations through splicing plates. External driver is exchangeable through quick connector among non-dimmable driver, Triac dimmable, 0-10V and DALI dimmable drivers.

Materials of Housing : Aluminium
Materials of Optics : PC



Code	Watt	Size(AxBxCmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
CL113A-6-25W	25W	175x175x110	150-160	2750lm	0.83	18PCS
CL113A-6-35W	35W	175x175x110	150-160	3850lm	0.83	18PCS

CCT — 3000K — 4000K — 5700K

Trim — White — Black

CL113B Downlight



CL113B Gimbal downlight adopts brand CITIZEN COB. External driver is exchangeable through quick connector among non-dimmable driver, Triac dimmable, 0-10V and DALI dimmable drivers.

Materials of Housing : Aluminium
Materials of Optics : PC



Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
CL113B-6-25W	25W	Ø180x110	Ø150-160	2750lm	0.79	18PCS
CL113B-6-35W	35W	Ø180x110	Ø150-160	3850lm	0.79	18PCS

CCT — 2700K — 3000K — 4000K

Trim — White — Black



CL146 Downlight



CL146 is gyro design commercial LED downlight with single/double/triple head options. It is tiltable 45° in all directions 355°. SMD with 1CCT/ 3CCT, COB LED light source is available.

Materials of Housing : Die-casting Aluminium
Materials of Optics : PC



Code	Watt	Size(AxBxCmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
CL146A-15W(COB)	15W	125x125x88	115x115	1590lm	0.63	12PCS
CL146A-30W(COB)	30W	228x125x88	218x115	3240lm	0.95	12PCS
CL146A-45W(COB)	45W	331x125x88	321x115	4830lm	1.32	6PCS
CL146B-8W(SMD)	8W	125x125x88	115x115	770lm	0.63	12PCS
CL146B-16W(SMD)	16W	228x125x88	218x115	1480lm	0.95	12PCS
CL146B-24W(SMD)	24W	331x125x88	321x115	2400lm	1.32	6PCS

CCT — 2700K — 3000K — 4000K

Trim — White — Black

CL99 Downlight



CL99 downlight is a unique replaceable module design which makes an easier installation and maintenance. The drivers are separate and external for easy replacement. It is an ideal design for commercial lighting.


Materials of Housing : Die-casting Aluminium
Materials of Optics : PC




Code	Watt	Size(AxBxCmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
CL99-30W	1x30W	175x175x110	160-160	3500lm	1.25	12PCS
CL99-60W	2x30W	330x175x110	310-160	6700lm	2.25	6PCS
CL99-90W	3x30W	475x175x110	455-160	9870lm	3.20	6PCS
CL99-30W-C3	1x30W	175x175x110	160-160	2950lm	1.25	12PCS
CL99-60W-C3	2x30W	330x175x110	310-160	5900lm	2.25	6PCS
CL99-90W-C3	3x30W	475x175x110	455-160	8600lm	3.20	6PCS

CCT — 2700K — 3000K — 4000K

Finish — White — Black

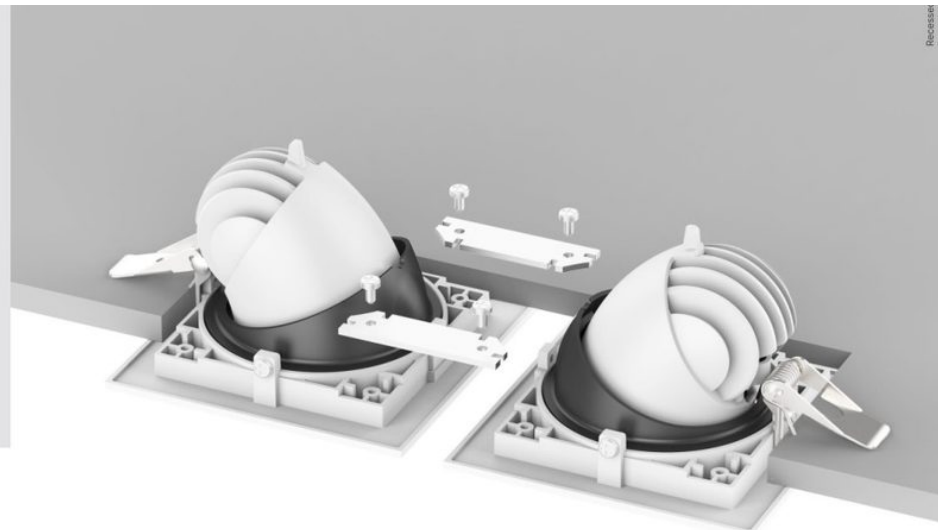

CL108 Downlight



CL108 Gimbal downlight adopts brand CITIZEN COB, Square modular design allows various DIY combinations through splicing plates. External driver is exchangeable through quick connector among non-dimmable driver, Triac dimmable, 0-10V and DALI dimmable drivers.

Materials of Housing : Die-casting Aluminium
Materials of Optics : PC



Code	Watt	Size(AxBxCmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
CL108-2.5-10W	10W	100x100x70	85-85	780lm	0.29	36PCS
CL108-4-15W	15W	145x145x107	125-125	1290lm	0.60	18PCS
CL108-4-20W	20W	145x145x107	125-125	2100lm	0.60	18PCS
CL108-6-35W	35W	180x180x129	165-165	3800lm	1.07	12PCS
CL108-6-45W	45W	180x180x129	165-165	4350lm	1.07	12PCS

CCT — 2700K — 3000K — 4000K


Trim — White — Black

DIY Splicing Scoop downlight






DL326 Downlight

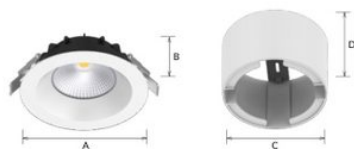

DL326 is a super slim COB downlight, which can be recessed and surface mounted with extra accessory, 4", 6", 8" .

Materials of Housing : Die-casting Aluminium

Materials of Optics : Reflector+Tempered glass



Code	Watt	Size(AxB/CxDmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL326-2.5-6W	6W	Ø85x36	Ø68-75	620lm	0.19	36PCS
DL326-3-10W	10W	Ø110x45	Ø90-95	1000lm	0.26	36PCS
DL326-3-13W	13W	Ø110x45	Ø90-95	1330lm	0.26	36PCS
DL326-4-13W	13W	Ø145x52	Ø120-130	1380lm	0.39	30PCS
DL326-4-18W	18W	Ø145x52	Ø120-130	1990lm	0.39	30PCS
DL326-6-18W	18W	Ø190x52	Ø160-170	2290lm	0.58	20PCS
DL326-6-25W	25W	Ø190x52	Ø160-170	3080lm	0.58	20PCS
DL326-8-18W	18W	Ø228x59	Ø200-210	2160lm	0.78	12PCS
DL326-8-25W	25W	Ø228x59	Ø200-210	2990lm	0.78	12PCS
DL326-8-35W	35W	Ø228x59	Ø200-210	3860lm	0.78	12PCS
ACC-DL326-4-WT	-	Ø148x93	-	-	0.34	24PCS
ACC-DL326-6-WT	-	Ø193x93	-	-	0.43	12PCS
ACC-DL326-8-WT	-	Ø232x93	-	-	0.53	12PCS



CL94 Downlight



CL94 LED downlight designed with a deep reflector, provides optimal glare control(UGR<19). It adopts brand CITIZEN COB for uniform and accenting lighting. Ideal for commercial and residential applications looking for a clean, minimalist look.


Materials of Housing : Die-casting Aluminium

Materials of Optics : Aluminium



Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
CL94-3-13W	13W	Ø110x100	Ø95-100	920lm	0.38	24PCS
CL94-6-25W	25W	Ø190x127	Ø165-180	2550lm	0.85	12PCS
CL94-8-35W	35W	Ø230x140	Ø205-220	3350lm	1.20	12PCS

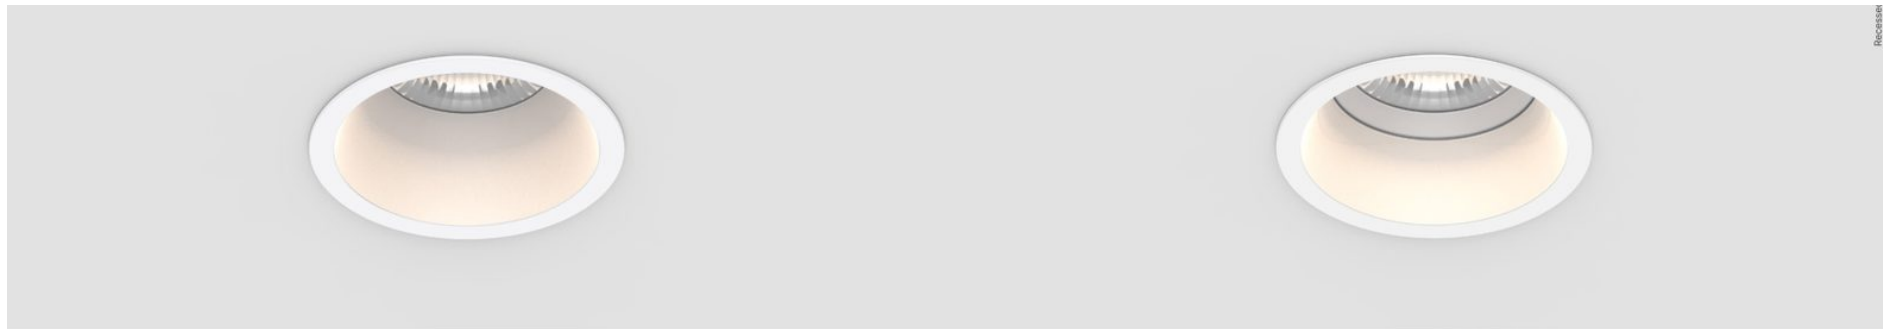

Recessed
Downlight

DL440 ^{NEW} Downlight



DL440 is a deep reflector and narrow trim design fixed COB downlight with high CRI90 and low glare UGR<18. Various beam angle options: 24°/36°/60°. External driver design with Triac dim, 0-10V, DALI dim available.

Materials of Housing : Aluminium

Materials of Optics : PC



Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL440-3-10W	10W	Ø110x90	Ø90-100	1110lm	0.41	24PCS
DL440-4-13W	13W	Ø150x120	Ø130-140	1400lm	0.76	12PCS
DL440-4-18W	18W	Ø150x120	Ø130-140	1960lm	0.76	12PCS
DL440-6-18W	18W	Ø190x149	Ø170-180	1950lm	1.20	4PCS
DL440-6-25W	25W	Ø190x149	Ø170-180	2770lm	1.20	4PCS
DL440-6-35W	35W	Ø190x149	Ø170-180	3630lm	1.20	4PCS
DL440-8-18W	18W	Ø220x149	Ø200-210	2010lm	1.39	4PCS
DL440-8-25W	25W	Ø220x149	Ø200-210	2850lm	1.39	4PCS
DL440-8-35W	35W	Ø220x149	Ø200-210	3640lm	1.39	4PCS
DL440-8-40W	40W	Ø220x149	Ø200-210	3880lm	1.39	4PCS

CCT — 3000K — 4000K — 5700K

Trim — Black

CL440 ^{NEW} Downlight



CL440 is a deep reflector and narrow trim design COB downlight with high CRI90 and low glare UGR<18. 15 degree adjustable in vertical direction. Various beam angle options 24°/36°/60°. External driver design with Triac dim, 0-10V, DALI dim available.

Materials of Housing : Aluminium


Materials of Optics : PC



Code	Watt	Size(AxBmm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
CL440-3-10W	10W	Ø110x90	Ø90-100	1000lm	0.41	24PCS
CL440-4-13W	13W	Ø150x120	Ø130-140	1400lm	0.76	12PCS
CL440-4-18W	18W	Ø150x120	Ø130-140	1930lm	0.76	12PCS
CL440-6-18W	18W	Ø190x149	Ø170-180	1980lm	1.20	4PCS
CL440-6-25W	25W	Ø190x149	Ø170-180	2740lm	1.20	4PCS
CL440-6-35W	35W	Ø190x149	Ø170-180	3630lm	1.20	4PCS


CCT — 3000K — 4000K — 5700K

Trim — Black

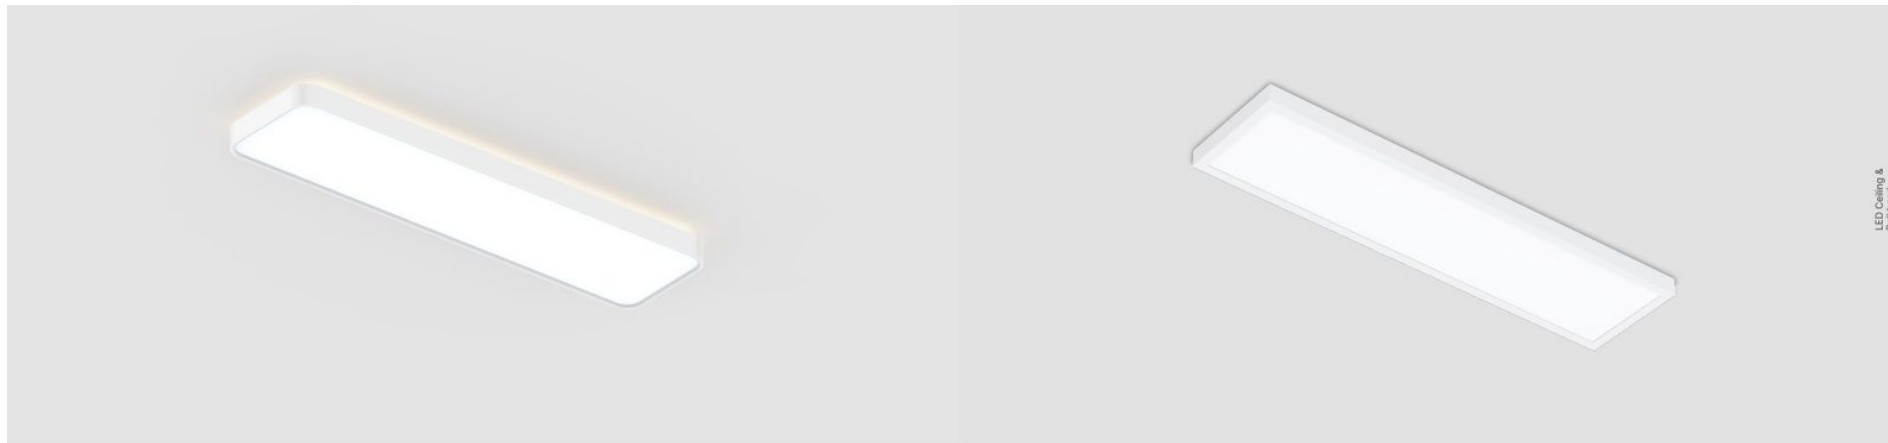

LED Ceiling & Bulkhead

AL194 ^{NEW} Ceiling light



AL194 is a rectangular led ceiling light, adopting high lumen SMD LED, white and black finish can be provided, DALI dim and interchangeable CCT function are available. Installation way: surface mounted and pendant.

Materials of Housing : Aluminium
Materials of Optics : PS



Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
AL194-36W	36W	1200x300x72	5200lm	4.50	2PCS
AL194-42W	42W	1200x300x72	6100lm	4.50	2PCS
AL194-50W	50W	1200x300x72	7300lm	4.50	2PCS

CCT — 3000K — 4000K — 5700K


Finish — White — Black

Installation accessories



ACC-AL194-WT/BK-0200
ACC-AL194-WT/BK-DA-0200

CK32 ^{NEW} Ceiling light



CK32 is an integral surface mounted panel, with high-quality SPCC and aluminum structure. It reached high lumen efficiency 120lm/W. Multiple size in 25121. Function is available with triac dim, 0/1-10V, DALI dim.

Materials of Housing : SPCC+Aluminium
Materials of Optics : PMMA+PS



Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
CK32-25121-30W	30W	1210x250x48	3600lm	3.30	4PCS
CK32-25151-50W	50W	1510x250x48	6000lm	3.60	4PCS
CK32-1841231-22W	22W	1231x184x48	3080lm	2.65	5PCS
CK32-1841531-42W	42W	1531x184x48	5880lm	3.45	5PCS

CCT — 2700K — 3000K — 6500K

Finish — White


Installation accessories




Suspension kit
(Customized length)


Linear Light

10 TECHNICAL DATASHEETS

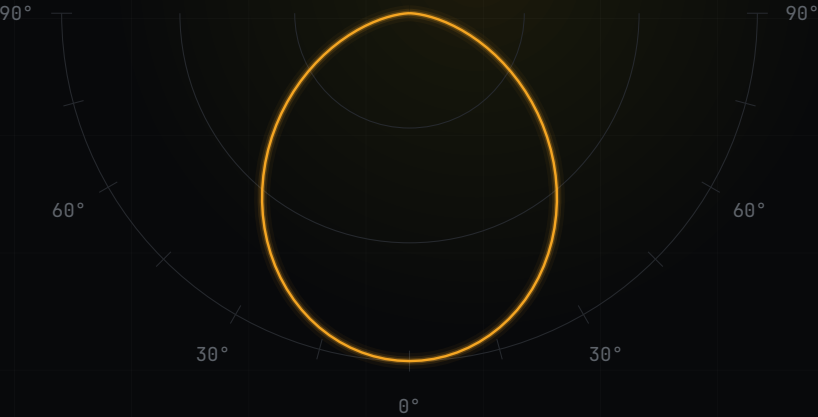

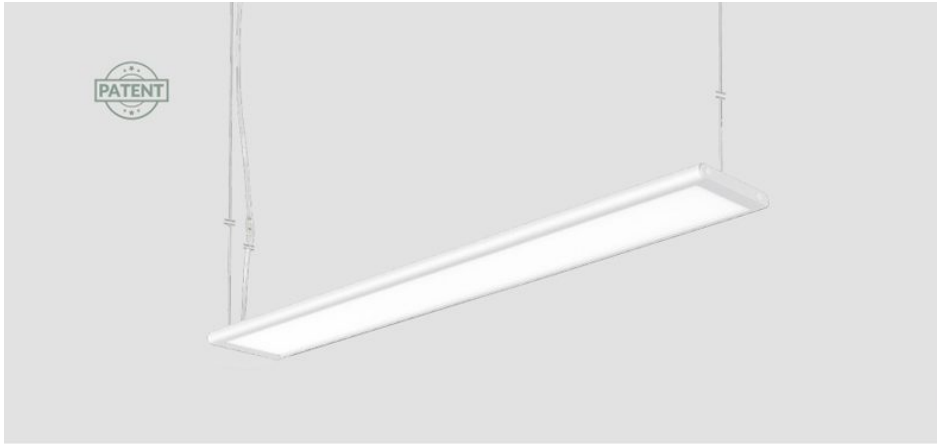

DB15B Batten



DB15B panel light is up & down design with 270° wide beam angle. Optics with side-lit SMD. External driver available with on/ off and triac dim.

Materials of Housing : Aluminium

Materials of Optics : PS



Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DB15B-600-20W	20W	600x148x17	1400lm	1.60	6PCS
DB15B-900-30W	30W	900x148x17	2250lm	1.90	6PCS
DB15B-1200-45W	45W	1200x148x17	2790lm	2.30	6PCS

CCT — 3000K — 4000K — 5700K

Finish — White — Black





OL02 Office Lighting



OL02 free standing luminaire is up & down panel design, available with standing and desk version. OL02A with USB, OL02B without USB version. Function available with touchable 0-10V dimmer, PIR sensor function, and light sensor. Optics with high quality SMD LED, reach UGR<14.

Materials of Housing : Aluminium
Materials of Optics : PMMA



Code	Watt	Size(AxBxCxDmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
OL02/B-75W-DOS	75W	720x340x21.5x1900	8200lm	Flat lamp body:2.70 Lamp pole:3.10 Lamp base:6.70	6PCS 6PCS 2x3PCS
OL02C/D-75W-DOS	75W	720x340x21.5x1188	8200lm	Flat lamp body:2.70 Lamp pole:3.00	6PCS 6PCS

CCT — 3000K — 4000K — 5700K — Finish — White — Black

- Indirect lighting and direct lighting (500~700LUX on the desk)
- PMMA LGP with Prismatic diffuser to achieve UGR<14 ideal for office lighting.

STATUS



- PIR sensor detector automatically switches the luminaire on and then switches it off when there is no one in the room.

- light sensor continuously measures the illuminance level on the desk and dims the light itself depending on the amount of available daylight and artificial lighting.

ON/OFF



Dimming button

- Short press in 1s, brightness will increase/ decrease 5%
- Long press brightness will increase/ decrease continually

Sensor



Flat lamp base with reliable stability/saving space and widely work with office furniture



OL06 Office Lighting



OL06 free standing luminaire is up & down reflector design, available with standing and desk version. OL06A is for floor standing, OL06B is for desk installation, OL06C is for floor standing with smart control, OL06D is for desk installation with smart control. Optics with SMD and reflector design, UGR<16, 125lm/W high light efficiency. Function with 0-10V dimmer, light sensor, PIR sensor module and USB connector.

Materials of Housing : Aluminium
Materials of Optics : PC / PET



Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
OL06A-80W-DOS	80W	1060x60x53x2026	10500lm	Flat lamp body+Lamp pole:5.70 Lamp base:6.80	3PCS 3PCS
OL06B-80W-DOS	80W	1060x60x53x1276	10500lm	5.10	3PCS
OL06C-85W-B	85W	1060x60x53x2026	10500lm	Flat lamp body+Lamp pole:5.70 Lamp base:6.80	3PCS 3PCS
OL06C-75W-B1	75W	1060x60x53x2026	10500lm	Flat lamp body+Lamp pole:5.70 Lamp base:6.80	3PCS 3PCS
OL06D-85W-B	85W	1060x60x53x1276	10500lm	5.10	3PCS
OL06D-75W-B1	75W	1060x60x53x1276	10500lm	5.10	3PCS

CCT — 3000K — 4000K — 5700K — Finish — White

OL07 Office Lighting



OL07 free standing luminaire is up & down panel design. OL07A is professional version, OL07B is intelligent version with Casambi dimming. OL07A professional version could be 0-10V dim, PIR sensor and daylight sensor, with/ without USB version for option. OL07B intelligent version is smart dim by Casambi. 120 degree beam angle and UGR<16 could provide uniform lighting performance. Optics with UGR<16 and high lumen up to 12,000lm.

Materials of Housing : Aluminium
Materials of Optics : PMMA/PC



Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
OL07A-75W-DOS	75W	1925x920x300	7500lm	14	3PCS
OL07A-100W-DOS	100W	1925x920x300	10000lm	14	3PCS
OL07B-85W-B	85W	1925x920x300	8500lm	14	3PCS
OL07B-100W-B	100W	1925x920x300	10000lm	14	3PCS
OL07B-75W-B1	75W	1925x920x300	7500lm	14	3PCS
OL07B-100W-B1	100W	1925x920x300	10000lm	14	3PCS

CCT — 3000K — 4000K — 5000K — Finish — White

LED Panel & Troffer
& Office Lighting

OL06 Office Lighting



OL06 free standing luminaire is up & down reflector design, available with standing and desk version. OL06A is for floor standing, OL06B is for desk installation, OL06C is for floor standing with smart control, OL06D is for desk installation with smart control. Optics with SMD and reflector design, UGR<16, 125lm/W high light efficiency. Function with 0-10V dimmer, light sensor, PIR sensor module and USB connector.

Materials of Housing : Aluminium
Materials of Optics : PC / PET



Code	Watt	Size(AxBxCxDmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
OL06A-80W-DOS	80W	1060x60x53x2026	10500lm	Flat lamp body+Lamp pole:5.70 Lamp base:6.80	3PCS 3PCS
OL06B-80W-DOS	80W	1060x60x53x1276	10500lm	5.10	3PCS
OL06C-85W-B	85W	1060x60x53x2026	10500lm	Flat lamp body+Lamp pole:5.70 Lamp base:6.80	3PCS 3PCS
OL06C-75W-B1	75W	1060x60x53x2026	10500lm	Flat lamp body+Lamp pole:5.70 Lamp base:6.80	3PCS 3PCS
OL06D-85W-B	85W	1060x60x53x1276	10500lm	5.10	3PCS
OL06D-75W-B1	75W	1060x60x53x1276	10500lm	5.10	3PCS

CCT — 3000K — 4000K — 5700K — Finish — White

OL07 Office Lighting



OL07 free standing luminaire is up & down panel design. OL07A is professional version, OL07B is intelligent version with Casambi dimming. OL07A professional version could be 0-10V dim, PIR sensor and daylight sensor, with/ without USB version for option. OL07B intelligent version is smart dim by Casambi. 120 degree beam angle and UGR<16 could provide uniform lighting performance. Optics with UGR<16 and high lumen up to 12,000lm.

Materials of Housing : Aluminium
Materials of Optics : PMMA/PC



Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
OL07A-75W-DOS	75W	1925x920x300	7500lm	14	3PCS
OL07A-100W-DOS	100W	1925x920x300	10000lm	14	3PCS
OL07B-85W-B	85W	1925x920x300	8500lm	14	3PCS
OL07B-100W-B	100W	1925x920x300	10000lm	14	3PCS
OL07B-75W-B1	75W	1925x920x300	7500lm	14	3PCS
OL07B-100W-B1	100W	1925x920x300	10000lm	14	3PCS

CCT — 3000K — 4000K — 5000K — Finish — White



DB160 Acoustic linear light



DB160 is an integrated acoustic linear system that offers unmatched possibilities to control noise and provide optimal lighting in commercial environments. For optic design, DB160 adopts high lumen SMD, direct and indirect lighting design, offering a uniform light distribution. For sound management, the polyester fiber sound-absorbing board is with striped grooves, and the concave-convex structure can fully diffuse excess sound rays, which can realize frequency sound absorption and diffusion, making the sound clearer and fuller, better integration of acoustics and modern lamps together. It supports CCT adjustable and DALI dim.

Materials of Housing : Polyester fibre+Aluminium

Materials of Optics : PC



Code	Watt	Size(AxBxCmm)	Lumen(+5%)	N.W/pc(kgs)	Q'ty/CTN
DB160A-1200-36W	36W	1252x45x80	3800lm	2.23	6PCS
DB160A-1500-50W	50W	1480x45x80	5000lm	2.83	6PCS
DB160B-1200-36W	36W	1252x45x80	4550lm	2.23	6PCS
DB160B-1500-50W	50W	1480x45x80	6200lm	2.83	6PCS
DB160C-1200-36W	36W	1252x45x80	3800lm	2.23	6PCS
DB160C-1500-50W	50W	1480x45x80	5800lm	2.83	6PCS
DB160A-1200-46W/ACC-DB160	36W(Direct)	1292x64x400	3800lm	5.28	1PCS
DB160A-1200-46W/ACC-DB160	10W(Indirect)+36W(Direct)	1292x64x400	5000lm	5.28	1PCS
DB160A-1500-65W/ACC-DB160	50W(Direct)	1500x64x400	5000lm	5.95	1PCS
DB160A-1500-65W/ACC-DB160	15W(Indirect)+50W(Direct)	1500x64x400	6800lm	5.95	1PCS
DB160B-1200-46W/ACC-DB160	36W(Direct)	1292x64x400	4550lm	5.28	1PCS
DB160B-1200-46W/ACC-DB160	10W(Indirect)+36W(Direct)	1292x64x400	5750lm	5.28	1PCS
DB160B-1500-65W/ACC-DB160	50W(Direct)	1500x64x400	6200lm	5.95	1PCS
DB160B-1500-65W/ACC-DB160	15W(Indirect)+50W(Direct)	1500x64x400	8000lm	5.95	1PCS
DB160C-1200-46W/ACC-DB160	36W(Direct)	1292x64x400	3800lm	5.28	1PCS
DB160C-1200-46W/ACC-DB160	10W(Indirect)+36W(Direct)	1292x64x400	4800lm	5.28	1PCS
DB160C-1500-65W/ACC-DB160	50W(Direct)	1500x64x400	5800lm	5.95	1PCS
DB160C-1500-65W/ACC-DB160	15W(Indirect)+50W(Direct)	1500x64x400	7500lm	5.95	1PCS



DIY or ACC-DB160-1200/1500 Upward LED module

DB160/ACC-DB160 Acoustic lighting fixture

DB160A
Grill reflector
UGR<19 95lm/w @White 4000K

DB160B
Opal diffuser
120lm/w @White 4000K

DB160C
Prismatic diffuser
95lm/w @White 4000K

CCT switch & Up module switch

LED Linear DB160 UPSHINE CASAMBI

Acoustic Lighting



DB05 Batten



DB05 is an elegant design with low cost and super slim construction. Surface mounted and suspended installation available.

Materials of Housing : Aluminium
Materials of Optics : PC



Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DB05A/C-600-20W	20W	600X90X46	1710lm	0.86	12PCS
DB05A/C-900-30W	30W	900X90X46	2630lm	1.30	12PCS
DB05A/C-1200-40W	40W	1200X90X46	3540lm	1.98	12PCS
DB05B-600-20W	20W	600X90X28	1710lm	0.82	20PCS
DB05B-900-30W	30W	900X90X28	2630lm	0.95	12PCS
DB05B-1200-40W	40W	1200X90X28	3540lm	1.50	12PCS

CCT — 3000K — 4000K — 5700K


Installation accessories



Finish — White — Black



DB179 Batten



DB179 ceiling luminaire is slim and modern design with high lumen SMD, an ideal replacement for traditional T8 luminaire. Four sizes for option: 550/850/1150/1450mm. Supports triac/ DALI dim, surface mounted and pendant installation.

Materials of Housing : Aluminium
Materials of Optics : PC



Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DB179-550-20W	20W	550x160x35	2800lm	0.94	12PCS
DB179-850-30W	30W	850x160x35	4200lm	1.37	6PCS
DB179-1150-40W	40W	1150x160x35	5600lm	1.82	6PCS
DB179-1450-47W	47W	1450x160x35	5700lm	1.82	6PCS
DB179-1450-50W	50W	1450x160x35	6900lm	2.16	4PCS

CCT — 3000K — 4000K — 5700K


Installation accessories



Finish — White — Black



DB199 NEW Batten



DB199 is a recessed batten light, which adopts high lumen SMD and internal driver. It can also support interchangeable CCT&power.

Materials of Housing : PC
Materials of Optics : PC




Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DB199-600-18W-A3	10W/14W/18W	600x82x35	2100lm	0.33	12PCS
DB199-1200-40W-A3	20W/30W/40W	1200x82x35	5000lm	0.64	6PCS

CCT — 3000K — 4000K — 5700K

Finish — White

DB124 Batten



DB124 is a compact design, it adopts 2835 SMD chip to create a high light output. 130 degrees large lighting area and multiple functions, like CCT changeable, microwave sensor available. Installation: pendant/surface mounted.

Materials of Housing : PC/SPCC
Materials of Optics : PC



Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DB124-600-20W	20W	600x124x60	1900lm	1.18	6PCS
DB124-1200-38W	38W	1200x124x60	3800lm	2.14	6PCS
DB124-1500-50W	50W	1500x124x60	5000lm	2.71	6PCS
DB124-1500-60W	60W	1500x124x60	6000lm	2.71	6PCS


CCT — 3000K — 4000K — 5700K

Finish — White

Installation accessories — Suspension kit 1000mm Adjustable



DB175 ^{NEW} Batten



DB175 is a slim batten light with big lighting area, available with 3CCT, DALI dim, emergency, and sensor function. High lumen efficiency 130lm/W and 160lm/W. Opal diffuser and prismatic diffuser for options.

Materials of Housing : PC
Materials of Optics : PC



Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/ pc(kgs)	Q'ty/ CTN
DB175-600-20W-A4 (ECO)	20W/16W/13W/10W	600x148x50	2750lm	1.00	12PCS
DB175-1200-40W-A4 (ECO)	40W/35W/24W/20W	1200x148x50	5600lm	2.00	6PCS
DB175-1200-40W-DA (ECO)	40W	1200x148x50	5500lm	2.00	6PCS
DB175-1500-55W-A4 (ECO)	55W/50W/45W/40W	1500x148x50	7700lm	2.40	6PCS
DB175-1500-55W-DA (ECO)	55W	1500x148x50	7700lm	2.40	6PCS
DB175-600-19W-A4 (PRO)	19W/16W/13W/10W	600x148x50	2950lm	1.00	12PCS
DB175-1200-38W-A4 (PRO)	38W/33W/22W/19W	1200x148x50	6100lm	2.00	6PCS
DB175-1200-38W-DA (PRO)	38W	1200x148x50	6100lm	2.00	6PCS
DB175-1500-53W-A4 (PRO)	53W/48W/43W/38W	1500x148x50	8500lm	2.40	6PCS
DB175-1500-53W-DA (PRO)	53W	1500x148x50	8500lm	2.40	6PCS
DB175-600-20W-A4	20W/16W/13W/10W	600x148x50	2650lm	1.00	12PCS
DB175-1200-40W-A4	40W/35W/24W/20W	1200x148x50	5400lm	2.00	6PCS
DB175-1200-40W-DA	40W	1200x148x50	5500lm	2.00	6PCS
DB175-1500-55W-A4	55W/50W/45W/40W	1500x148x50	7450lm	2.40	6PCS
DB175-1500-55W-DA	55W	1500x148x50	7450lm	2.40	6PCS


CCT ——— 3000K ——— 4000K ——— 5700K

Finish ———  White





DB200 NEW Batten



DB200 led linear light with stylish design, with modern and classic aesthetics looking, louver reflectors help to reach UGR<19. Available in various installation ways: suspended and surface mounted.

Materials of Housing : AL6063 Aluminum

Materials of Optics : PC



Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DB200-1200-A2	32W/42W	1200x160x45	4160lm/5460lm	3.00	2PCS
DB200-1500-A2	40W/50W	1480x160x45	5200lm/6500lm	3.50	2PCS

CCT — 3000K — 4000K — 5700K


Installation accessories



Suspension kit
ACC-DB200

Finish — White

DB153 NEW Batten



DB153 is a series including linear light and linear track achieve the efficient and standard-compliant low anti-glare lighting of workplaces, can be quickly converted between track light and linear light by replacing the power module - always meeting the requirements of the architecture and the arrangement of the workstations.

Materials of Housing : Aluminium


Materials of Optics : PMMA+PC




Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DB153-1200-36W	36W/32W/28W/24W	1200x85x54	5400lm	2.40	4PCS
DB153-1650-46W	46W/42W/38W/34W	1647x85x54	6900lm	2.90	4PCS

CCT — 3000K — 4000K — 5700K

Finish — White — Black

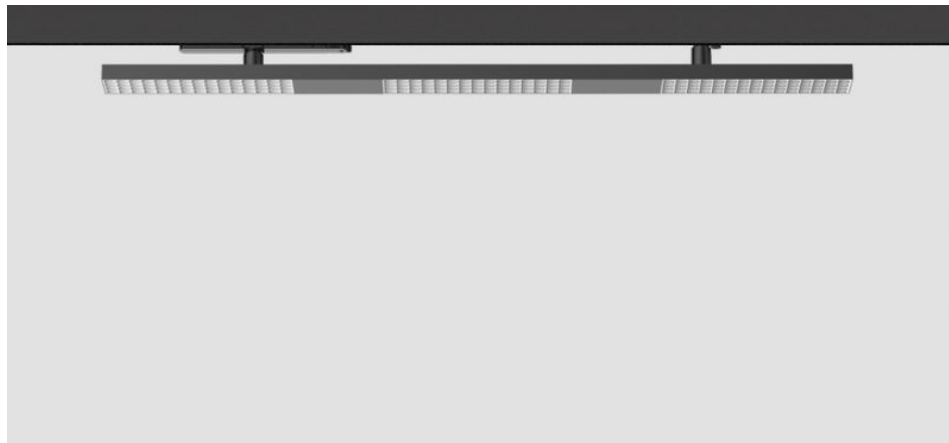


TL153 ^{NEW} Track light



TL153 is a series including linear light and linear track achieve the efficient and standard-compliant low anti-glare lighting of workplaces, can be quickly converted between track light and linear light by replacing the power module - always meeting the requirements of the architecture and the arrangement of the workstations.

Materials of Housing : Aluminium

Materials of Optics : PMMA+PC



TL153



DB153
P321

Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
TL153-1200-36W	36W/32W/28W/24W	1200x85x105	5400lm	1.85	4PCS

CCT ——— 3000K ——— 4000K ——— 5700K

Finish ——— White ——— Black




LED Track Light

MODULAR DESIGN LINER LIGHT WITH
TRACK MOUNTED LED BATTEN LIGHT

Track Spot Light

10 TECHNICAL DATASHEETS



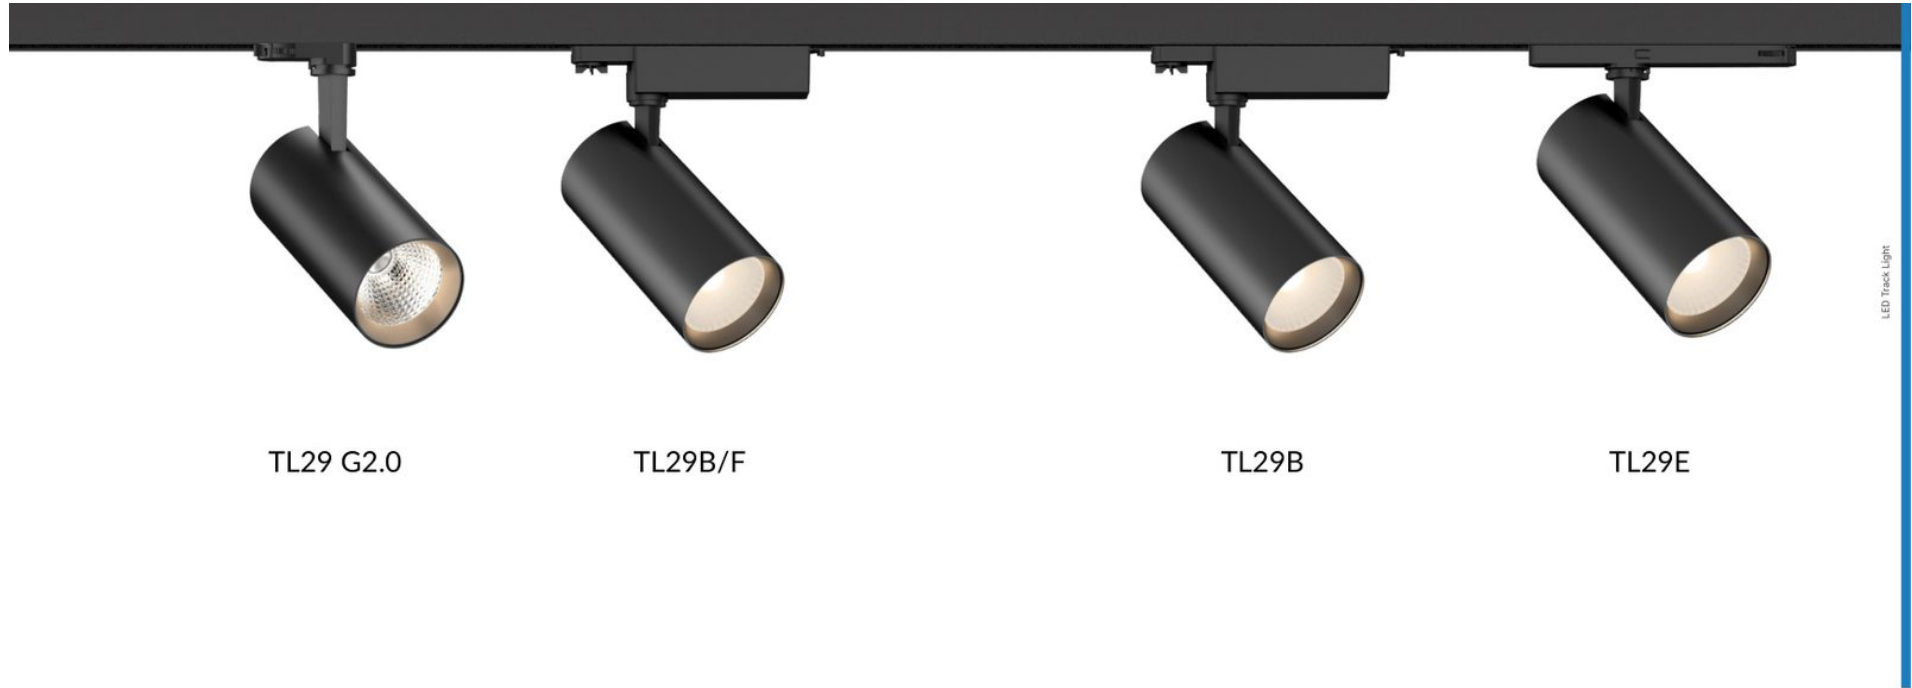


TL29 G2.0


TL29B/F

TL29B

TL29E

TL29 Track Light /Series/

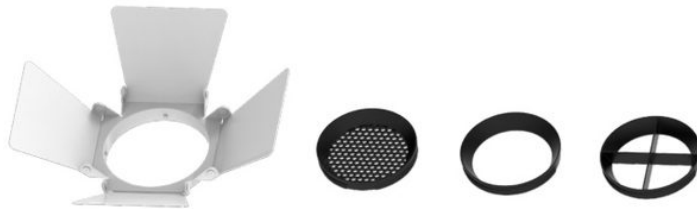

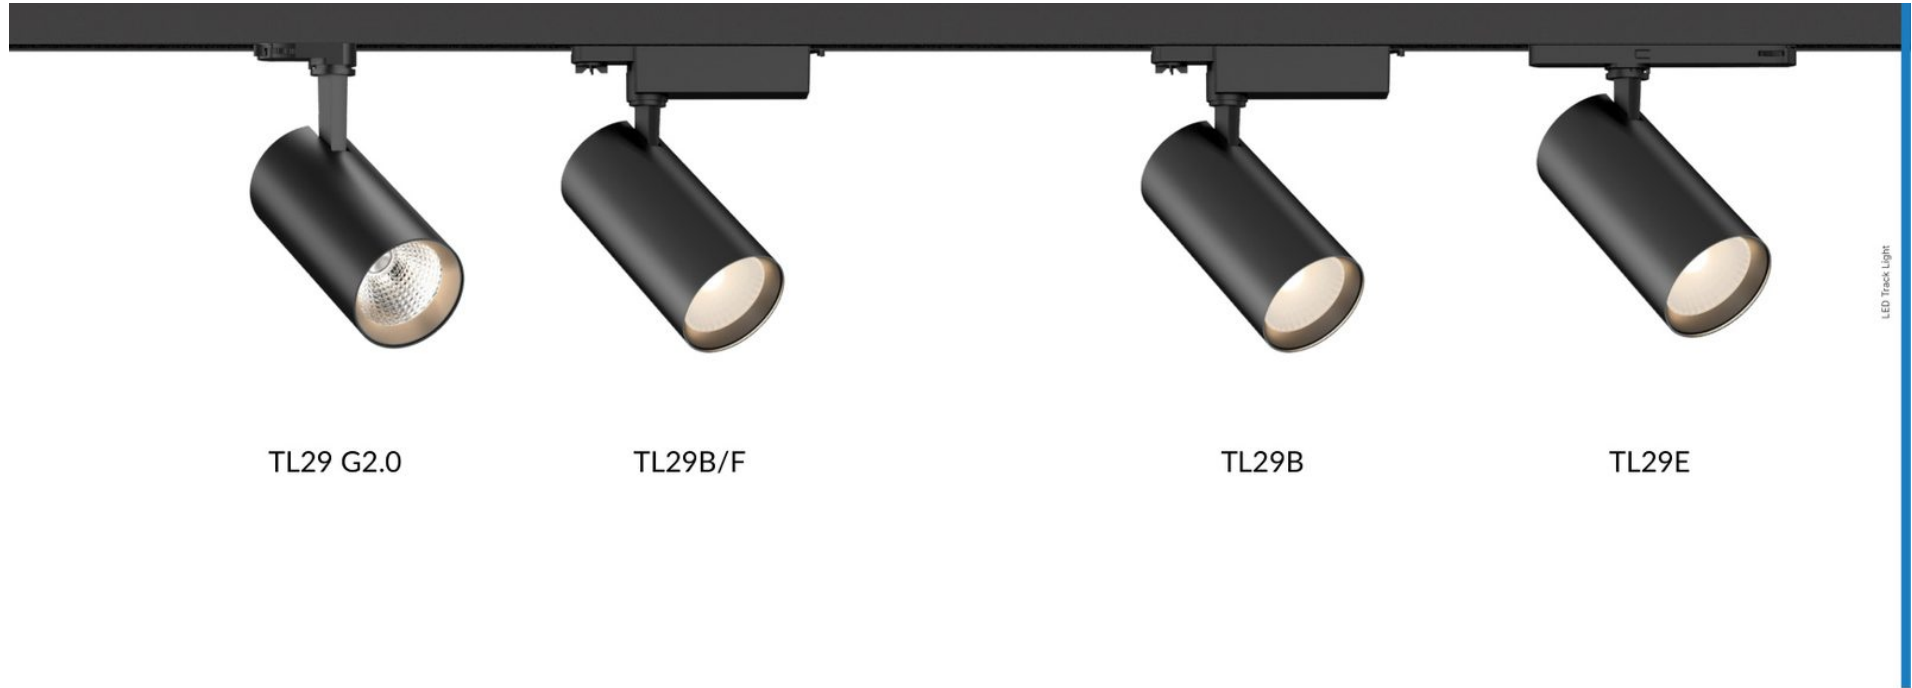


TL29 G2.0


TL29B/F

TL29B

TL29E

TL29 Track Light /Series/

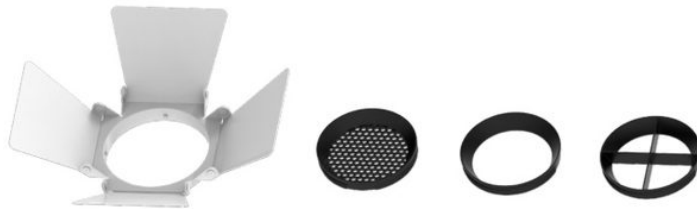

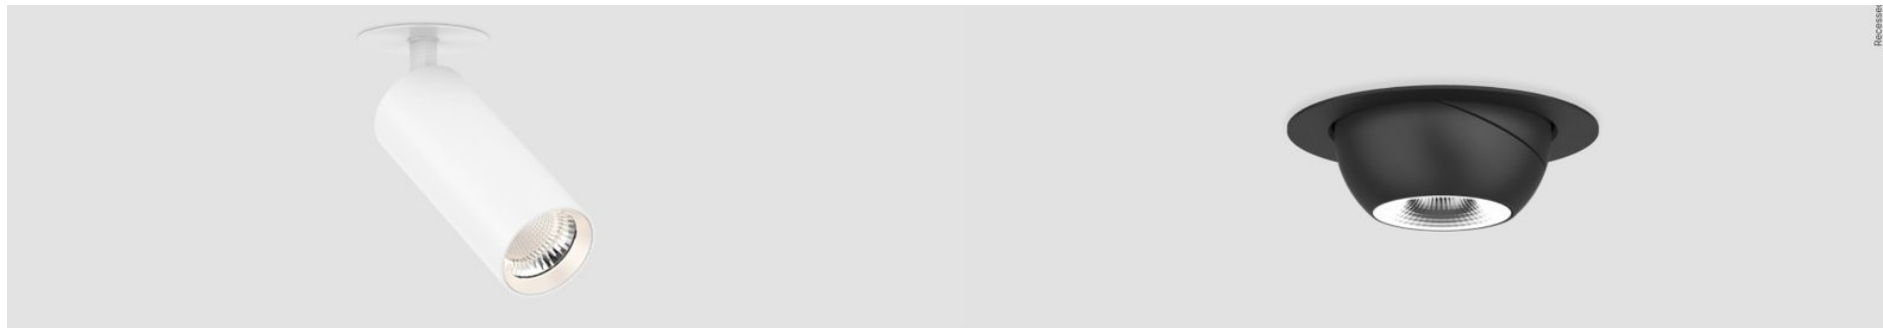

DL338 Downlight



DL338 is a DIY modular series with an exquisite appearance and anti-glare UGR19 design, 6 kinds of installation ways, 3 reflectors and 3 front ring colors can be exchangeable. It adopts brand Bridgelux COB led chip with 120lm/W light efficiency. Four size options: Ø55mm, Ø65mm, Ø85mm, Ø100mm. It can do triac dim, DALI dim, CCT interchangeable and wattage adjustable.

Materials of Housing : Aluminium


Materials of Optics : Aluminium+transparent tempered glass



Code	Watt	Size(Ax8mm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL338-55-6W	6W	Ø55x215	90-95	750lm	0.51	12PCS
DL338-55-10W	10W	Ø55x215	90-95	1200lm	0.51	12PCS
DL338-65-10W	10W	Ø65x235	90-95	1200lm	0.62	12PCS
DL338-65-15W	15W	Ø65x235	90-95	1750lm	0.62	12PCS
DL338-85-20W	20W	Ø85x274	90-95	2550lm	1.08	12PCS
DL338-85-25W	25W	Ø85x274	90-95	3150lm	1.08	12PCS
DL338-100-30W	30W	Ø100x288	90-95	3650lm	1.17	12PCS
DL338-100-35W	35W	Ø100x288	90-95	4100lm	1.17	12PCS



DL322B Downlight



DL322B adopts high lumen COB chip. The type B is recessed installation. ADC12 aluminum lamp body provides excellent heat dissipation. 340degree rotatory and lighting direction is 40 degree adjustable.


Materials of Housing : Die-casting Aluminium

Materials of Optics : PC




Code	Watt	Size(Ax8mm)	Cut-out(mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL322B-12W	12W	Ø172x100	Ø150-160	1400lm	1.13	12PCS
DL322B-16W	16W	Ø172x100	Ø150-160	1800lm	1.13	12PCS
DL322B-20W	20W	Ø172x100	Ø150-160	2100lm	1.13	12PCS



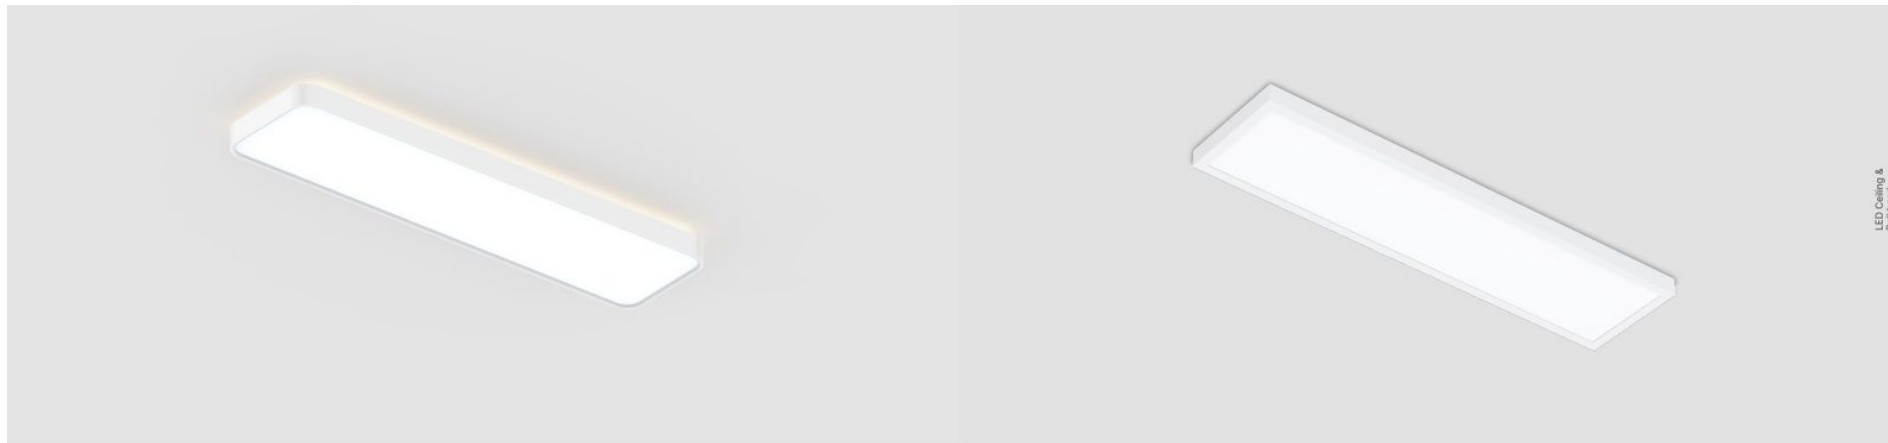

LED Ceiling & Bulkhead

AL194 ^{NEW} Ceiling light



AL194 is a rectangular led ceiling light, adopting high lumen SMD LED, white and black finish can be provided, DALI dim and interchangeable CCT function are available. Installation way: surface mounted and pendant.

Materials of Housing : Aluminium
Materials of Optics : PS



Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
AL194-36W	36W	1200x300x72	5200lm	4.50	2PCS
AL194-42W	42W	1200x300x72	6100lm	4.50	2PCS
AL194-50W	50W	1200x300x72	7300lm	4.50	2PCS

CCT — 3000K — 4000K — 5700K


Finish — White — Black

Installation accessories



ACC-AL194-WT/BK-0200
ACC-AL194-WT/BK-DA-0200

CK32 ^{NEW} Ceiling light



CK32 is an integral surface mounted panel, with high-quality SPCC and aluminum structure. It reached high lumen efficiency 120lm/W. Multiple size in 25121. Function is available with triac dim, 0/1-10V, DALI dim.

Materials of Housing : SPCC+Aluminium
Materials of Optics : PMMA+PS



Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
CK32-25121-30W	30W	1210x250x48	3600lm	3.30	4PCS
CK32-25151-50W	50W	1510x250x48	6000lm	3.60	4PCS
CK32-1841231-22W	22W	1231x184x48	3080lm	2.65	5PCS
CK32-1841531-42W	42W	1531x184x48	5880lm	3.45	5PCS


CCT — 2700K — 3000K — 6500K

Finish — White

Installation accessories




Suspension kit
(Customized length)

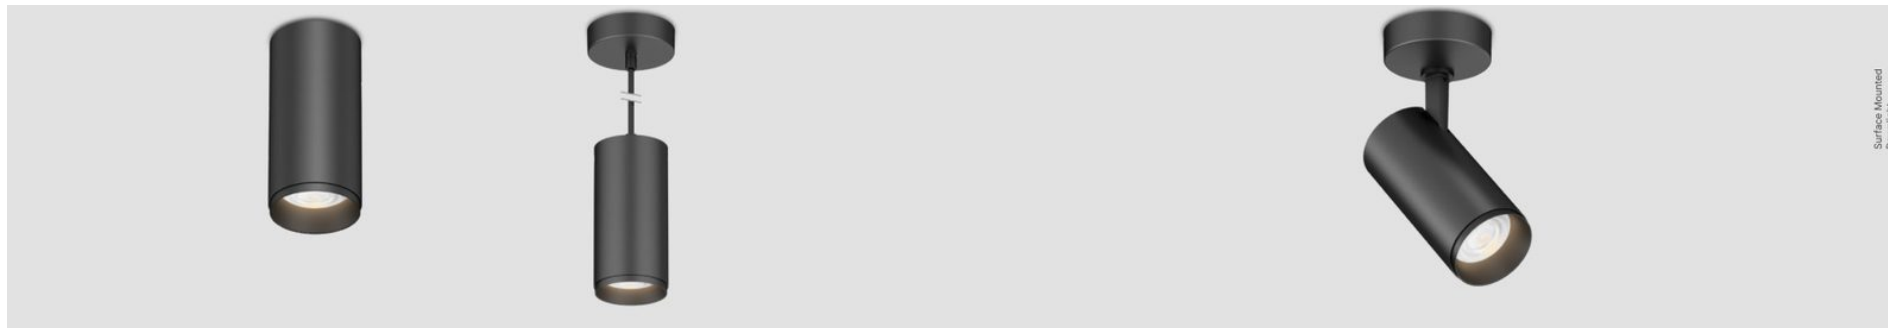

Surface Mounted Downlight

DL228A Downlight



DL228A adopt high lumen COB chip with uniform light effect and enhanced glare control. It offers a wide choice of beam angles 24°/36°/60° for optional. PD228 is suspended version.

Materials of Housing : Aluminium

Materials of Optics : PMMA




Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL228A-10W	10W	Ø65x157	1100lm	0.45	12PCS
DL228A-15W	15W	Ø65x157 (Non-dim) Ø85x178 (Triac-dim)	1650lm	0.45	12PCS
DL228A-20W	20W	Ø85x178	2250lm	0.67	12PCS
DL228A-25W	25W	Ø85x178	2700lm	0.67	12PCS
DL228A-30W	30W	Ø100x211	3050lm	1.00	12PCS
DL228A-40W	40W	Ø100x211	4200lm	1.00	12PCS
PD228-10W	10W	Ø65x157	1100lm	0.55	12PCS
PD228-15W	15W	Ø65x157 (Non-dim) Ø85x178 (Triac-dim)	1650lm	0.55	12PCS
PD228-20W	20W	Ø85x178	2250lm	0.80	12PCS
PD228-25W	25W	Ø85x178	2700lm	0.80	12PCS
PD228-30W	30W	Ø100x211	3050lm	1.15	12PCS
PD228-40W	40W	Ø100x211	4200lm	1.15	12PCS

CCT — 2700K — 3000K — 4000K Finish — White — Black

Interchangeable lens options — 24°/30°/45° for 10W/15W — 24°/36°/60° for 15W/20W/25W/30W/40W

DL228B

Downlight



DL228B surface mounted downlight with adjustable lighting orientation, 350° rotate and 90° tilt, it offers a wide choice of beam angles 24°/36°/60° for optional. Driver built-in easy for installation.

Materials of Housing : Aluminium

Materials of Optics : PMMA



Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
DL228B-10W	10W	Ø65x218	1100lm	0.55	12PCS
DL228B-15W	15W	Ø65x218 (Non-dim) Ø85x241 (Triac-dim)	1650lm	0.55	12PCS
DL228B-20W	20W	Ø85x241	2250lm	0.82	12PCS
DL228B-25W	25W	Ø85x241	2700lm	0.82	12PCS
DL228B-30W	30W	Ø100x274	3050lm	1.15	12PCS
DL228B-40W	40W	Ø100x274	4200lm	1.15	12PCS

CCT — 2700K — 3000K — 4000K Finish — White — Black

Interchangeable lens options — 24°/30°/45° for 10W/15W — 24°/36°/60° for 15W/20W/25W/30W/40W



TL90 Track light



TL90 is a high-end track light with professional optical design. It adopts COB light source, special deep reflector design achieves anti-glare effect (Type A UGR<10, Type B UGR<17). Module design provides an easily replacement with different optic parts: reflector+tempered glass with circle lighting spot, reflector+special PC lens with oval lighting spot. Compact structure with big power 40W/50W which meets a high brightness demand. Horizontally 358 degree, vertically 180 degree rotary. DALI dim available.

Materials of Housing : Die-casting Aluminium


Materials of Optics : Glass+Aluminium/ PC+Aluminium




Code	Watt	Size(Ax BxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
TL90-70-15W	15W	Ø70x214x107	1250lm	0.54	6PCS
TL90A-90-30W-A3	20W/25W/30W	Ø90x295x15	20W:2100lm/25W:2400lm/30W:2750lm	1.20	6PCS
TL90A-110-40W-A3	30W/35W/40W	Ø110x294.8x126	30W:3200lm/35W:3600lm/40W:3800lm	1.25	6PCS
TL90A-125-50W-A3	40W/45W/50W	Ø125x315.4x143	40W:4000lm/45W:4400lm/50W:4700lm	1.56	6PCS
TL90A-110-30W-DA	30W	Ø110x294.8x126	2600lm	1.25	6PCS
TL90A-125-40W-DA	40W	Ø125x315.4x143	3500lm	1.56	6PCS
TL90B-90-30W-A3	20W/25W/30W	Ø90x280	20W:2300lm/25W:2850lm/30W:3100lm	1.20	6PCS
TL90B-110-40W-A3	30W/35W/40W	Ø110x269.8	30W:3300lm/35W:3700lm/40W:4000lm	1.25	6PCS
TL90B-125-50W-A3	40W/45W/50W	Ø125x287.4	40W:4000lm/45W:4600lm/50W:5000lm	1.56	6PCS
TL90B-110-30W-DA	30W	Ø110x269.8	2900lm	1.25	6PCS
TL90B-125-40W-DA	40W	Ø125x287.4	3800lm	1.56	6PCS


CCT — 2700K — 3000K — 4000K — Finish — White — Black — Silver

INTERCHANGEABLE REFLECTOR AND DIFFUSER

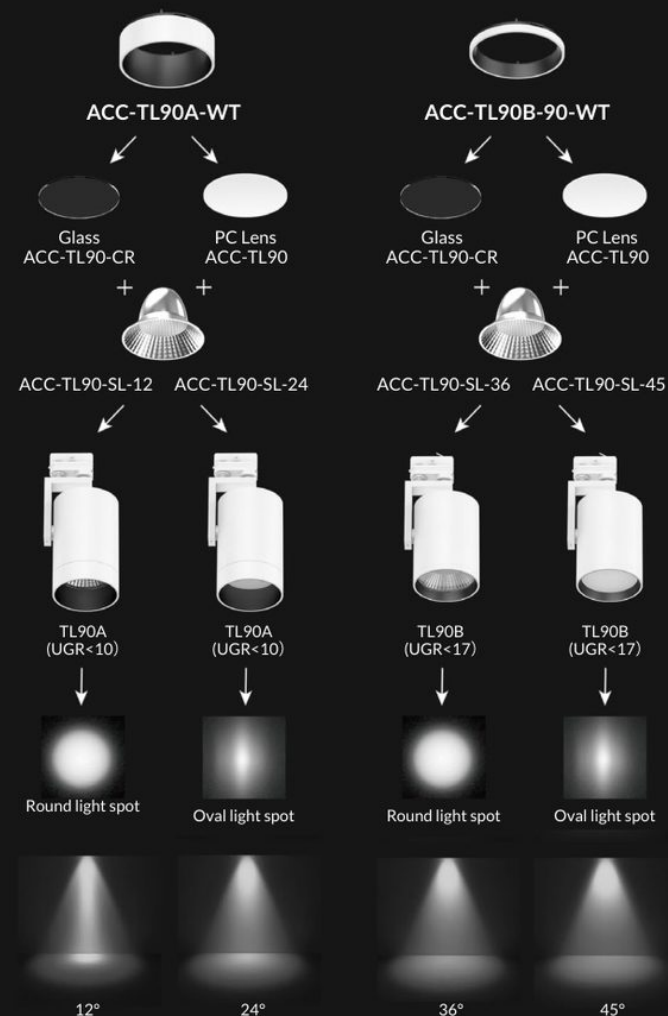

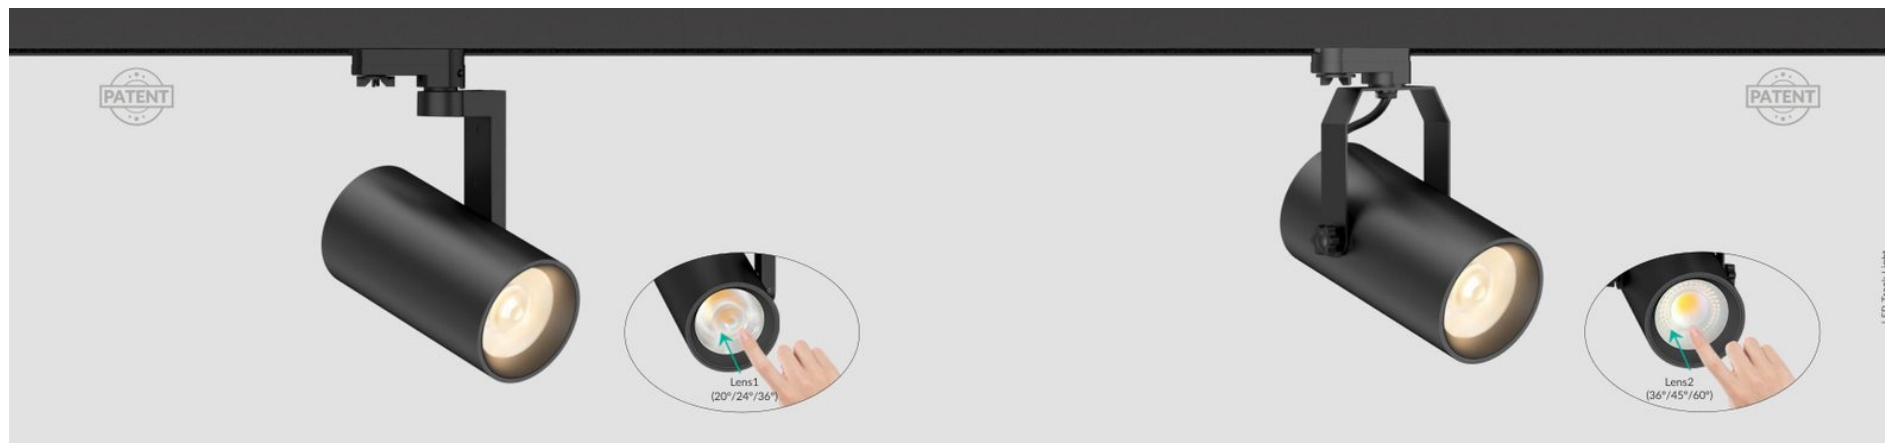

TL69A Track light



TL69 series track light with focus adjustable design, special lens can have a fast beam angle change (Just press the lens). Adopt high lumen Citizen light source, two bracket design options, changeable lighting orientation with 350° in horizontal direction and 300° in vertical direction.

Materials of Housing : PC/Aluminium

Materials of Optics : PMMA



Code	Watt	Size(Ax BxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
TL69A-25W	25W	Ø96x298x120	2950lm	1.20	12PCS
TL69A-35W	35W	Ø96x298x120	3950lm	1.20	12PCS

CCT — 2700K — 3000K — 4000K — Finish — White — Black

TL69B Track light



TL69B track light is with special design with lens changeable 36°~60° by press. Adopt high lumen Citizen light source effected 115lm/w. Black and white finish color for option.


Materials of Housing : PC/Aluminium

Materials of Optics : PMMA




Code	Watt	Size(Ax BxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
TL69B-25W	25W	Ø96x298x132	2950lm	1.20	12PCS
TL69B-35W	35W	Ø96x298x132	3950lm	1.20	12PCS

CCT — 2700K — 3000K — 4000K — Finish — White — Black

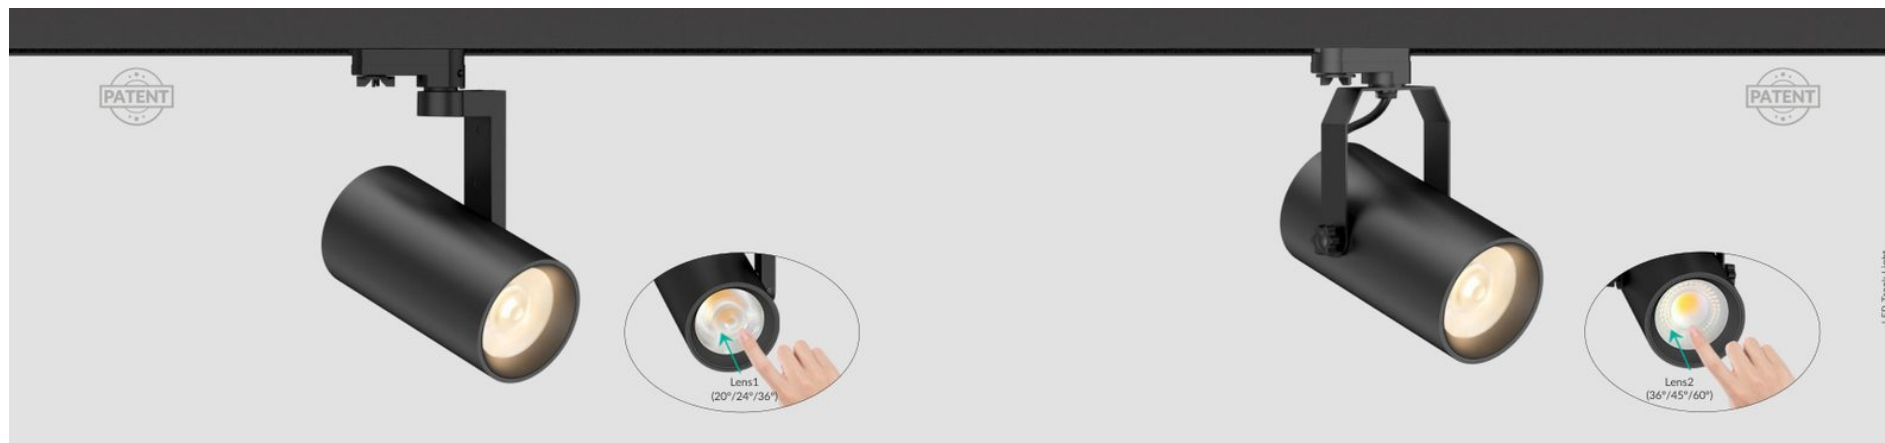

TL69A Track light



TL69 series track light with focus adjustable design, special lens can have a fast beam angle change (Just press the lens). Adopt high lumen Citizen light source, two bracket design options, changeable lighting orientation with 350° in horizontal direction and 300° in vertical direction.

Materials of Housing : PC/Aluminium

Materials of Optics : PMMA



Code	Watt	Size(Ax BxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
TL69A-25W	25W	Ø96x298x120	2950lm	1.20	12PCS
TL69A-35W	35W	Ø96x298x120	3950lm	1.20	12PCS

CCT — 2700K — 3000K — 4000K — Finish — White — Black

TL69B Track light



TL69B track light is with special design with lens changeable 36°~60° by press. Adopt high lumen Citizen light source effected 115lm/w. Black and white finish color for option.


Materials of Housing : PC/Aluminium

Materials of Optics : PMMA




Code	Watt	Size(Ax BxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
TL69B-25W	25W	Ø96x298x132	2950lm	1.20	12PCS
TL69B-35W	35W	Ø96x298x132	3950lm	1.20	12PCS

CCT — 2700K — 3000K — 4000K — Finish — White — Black

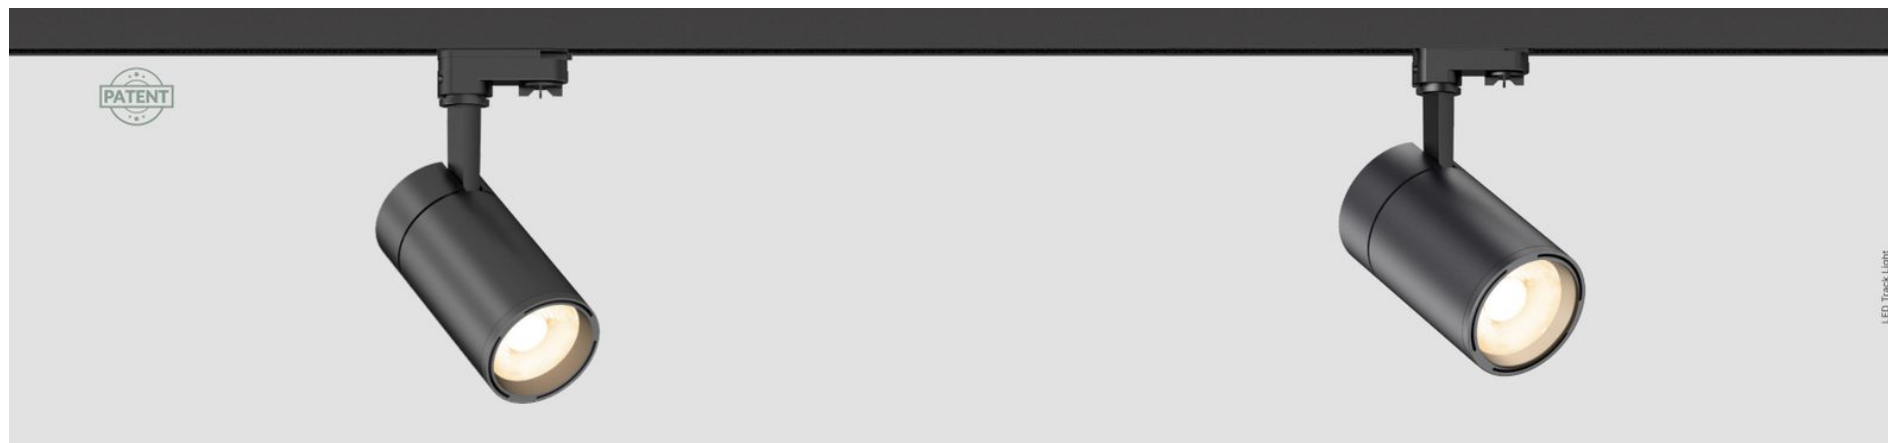

TL57A Track light



TL57A led track light with built-in driver, it adopts brand Citizen COB chip. Secondary optics with lens and reflector make more uniform light.

Materials of Housing : Aluminium
Materials of Optics : PC



Code	Watt	Size(AxBxCxDmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
TL57A-10W-D	10W	Ø65x127x223x84.5	1050lm	0.51	12PCS
TL57A-25W-D	25W	Ø80x157x254x84.5	2500lm	0.81	12PCS
TL57A-35W-D	35W	Ø100x167x259x84.5	3450lm	1.03	12PCS
TL57A-15W	15W	Ø65x127x223x84.5	1600lm	0.51	12PCS
TL57A-25W	25W	Ø80x157x254x84.5	2700lm	0.81	12PCS
TL57A-35W	35W	Ø100x167x259x84.5	3800lm	1.03	12PCS

CCT — 2700K — 3000K — 4000K — Finish — White — Black — Silver

TL58A Track light




TL58A LED track light with internal driver adopts CITIZEN chips with high quality LED source, CRI80/90/97 optional. Secondary optics with lens make more uniform light.

Materials of Housing : Aluminium
Materials of Optics : PC



Code	Watt	Size(AxBxCxDmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
TL58A-15W	15W	Ø65x131x227x131	1650lm	0.52	12PCS
TL58A-25W	25W	Ø80x152.5x249x152.5	2750lm	0.82	12PCS
TL58A-35W	35W	Ø100x167x259x167	3850lm	1.10	12PCS

CCT — 2700K — 3000K — 4000K — Finish — White — Black — Silver

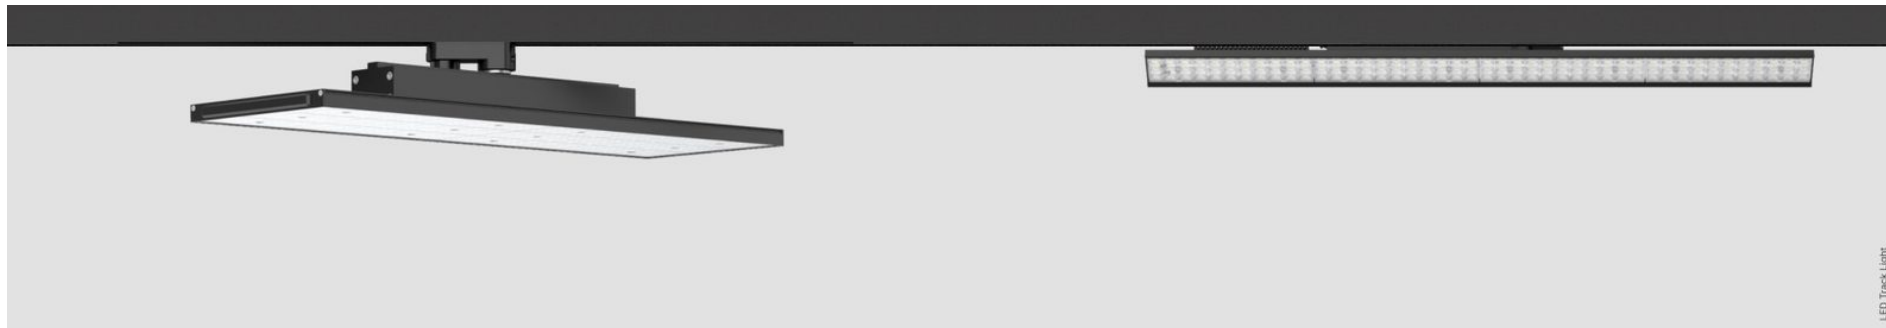

LED Track Light

TL111 Track light



TL111 LED track light with Osram brand driver is specifically designed for supermarket aisles. Type A with an adapter at the side while type B with adapter at the back and can do 350 degree rotary. European standard three-circuit track system is suitable. High lumen efficiency 130-140lm/W is available.

Materials of Housing : Aluminium
Materials of Optics : PMMA



Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
TL111A-50W	50W	670x190x80	7040lm	2.50	6PCS
TL111A-60W	60W	670x190x80	8250lm	2.50	6PCS
TL111A-80W	80W	670x190x80	10480lm	2.50	6PCS
TL111B-50W	50W	582x190x116	7040lm	2.50	6PCS
TL111B-60W	60W	582x190x116	8250lm	2.50	6PCS
TL111B-80W	80W	582x190x116	10480lm	2.50	6PCS

CCT — 3000K — 4000K — 5700K

Finish — White — Black

TL112 Track light



TL112 a new seamless linear track lighting system, which has thin body, light weight and compact structure, suitable for European standard three-circuit track system. Multiple PMMA lens optics 30°, 60°, 90°, double asymmetric 20° for options.

Materials of Housing : Aluminium
Materials of Optics : PMMA



Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
TL112-40W	40W	1152x80x85	5100lm	2.17	6PCS
TL112-60W	60W	1152x80x85	7150lm	2.17	6PCS

CCT — 3000K — 4000K — 5700K

Finish — White — Black

Magnetic Track Light


10 TECHNICAL DATASHEETS





NEW

DC-TL142-3710-18W




Power 10W/14W/18W
 Light flux 1000lm/1410lm/1820lm
 Beam angle 110°
 Color rendering 90
 Color temp. 3000K/4000K

Finishes




NEW

DC-TL142-3710-18W(Pill)




Power 10W/14W/18W
 Light flux 1000lm/1410lm/1820lm
 Beam angle 110°
 Color rendering 90
 Color temp. 2700K/3000K/4000K

Finishes

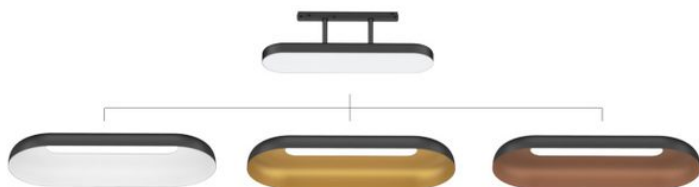

NEW

DC-TL142-12-18W




Power 10W/14W/18W
 Light flux 1050lm/1480lm/1900lm
 Beam angle 110°
 Color rendering 90
 Color temp. 3000K/4000K

Finishes

LED Track light
8.48V



PL-DD Panel light



PL-DD small round & square panel with complete diameter options. Optics with 2835SMD LED chip and PMMA LGP offer a great light transmittance and light output. External driver available with on/ off, triac, DALI and 0-10V.

Materials of Housing : Aluminium

Materials of Optics : PS(Diffuser)+PMMA(LGP)




Code	Watt	Size(AxBxCmm)	Cut-out(±5mm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PL1212-7W-DD	7W	120x120x21	105x105	580lm	0.24	36PCS
PL1515-9W-DD	9W	146x146x21	127x127	810lm	0.28	24PCS
PL1717-12W-DD	12W	171x171x21	155x155	1070lm	0.34	20PCS
PL2222-18W-DD	18W	224x224x21	205x205	1580lm	0.52	12PCS
PL3030-24W-DD	24W	300x300x21	277x277	2500lm	0.88	12PCS
PL1221-7W-DD	7W	Ø120x21	Ø108-113	580lm	0.20	36PCS
PL1521-9W-DD	9W	Ø145x21	Ø127-133	810lm	0.24	24PCS
PL1721-12W-DD	12W	Ø170x21	Ø157-162	1050lm	0.29	20PCS
PL2021-15W-DD	15W	Ø200*21	Ø177-182	1470lm	0.35	12PCS
PL2221-18W-DD	18W	Ø224x21	Ø205-212	1680lm	0.42	12PCS
PL2421-22W-DD	22W	Ø238*21	Ø224-228	2150lm	0.50	12PCS
PL3021-24W-DD	24W	Ø300x21	Ø282-288	2500lm	0.71	12PCS

CCT — 3000K — 4000K — 5700K

Finish — White

PL-W Panel light



PL-W round pendant panel light with side-lighting design. Optics with high quality diffuser and 3T PMMA LGP. 300mm, 400mm, 500mm, 600mm and 780mm diameter for options. Various installation ways with suspended, surface mounted and recessed. External driver available with on/ off, triac, DALI and 0-10V.

Materials of Housing : Aluminium

Materials of Optics : PMMA (LGP)



Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
PL3012-18W-W	18W	Ø300x12	1560lm	2.50	5PCS
PL4012-25W-W	25W	Ø400x12	2070lm	3.10	4PCS
PL4012-35W-W	35W	Ø400x12	2900lm	3.10	4PCS
PL5012-30W-W	30W	Ø500x12	2520lm	4.20	4PCS
PL5012-35W-W	35W	Ø500x12	2900lm	4.20	4PCS
PL6012-35W-W	35W	Ø600x12	3040lm	4.34	2PCS
PL6012-45W-W	45W	Ø600x12	3600lm	4.34	2PCS
PL8012-60W-W	60W	Ø780x20	5430lm	6.10	2PCS
PL8012-80W-W	80W	Ø780x20	7460lm	6.90	2PCS

CCT — 3000K — 4000K — 5700K

Finish — White



NEW
DC-PD142-50117-11W



Power 11W(9W/6.5W optional)
Light flux 920lm/760lm/550lm
Beam angle 24°/36°/50°
Color rendering 90
Color temp. 3000K/4000K

Finishes




NEW
DC-PD142-50117-11W (Bowl)



Power 11W(9W/6.5W optional)
Light flux 710lm/590lm/450lm
Beam angle 100°
Color rendering 90
Color temp. 3000K/4000K

Finishes

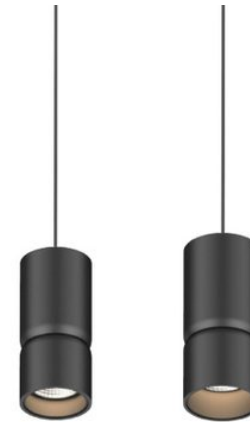

NEW
DC-PD142-4054-7W



Power 7W(6W/4.5W optional)
Light flux 690lm/610lm/470lm
Beam angle 36°/45°/60°
Color rendering 90
Color temp. 3000K/4000K

Finishes



NEW
DC-PD142-5067-9W



Power 9W(7W/5.5W optional)
Light flux 820lm/650lm/520lm
Beam angle 24°/36°/50°
Color rendering 90
Color temp. 3000K/4000K


Finishes



Glass

Cage

NEW
DC-PD142-5046-7W




Power 7W(6W/4.5W optional)
Light flux 360lm / 330lm / 260lm
Beam angle 300° / 70°
Color rendering 90
Color temp. 3000K/4000K

Finishes



LED Track light
5, 48V

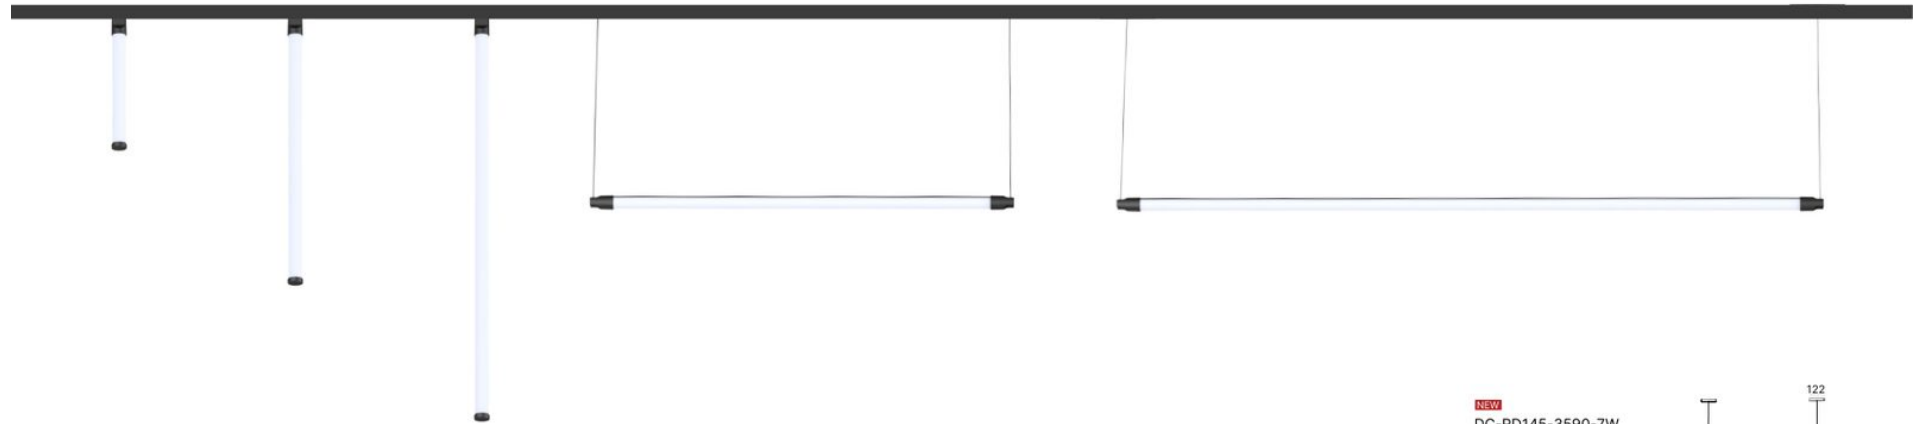

NEW
DC-PD145-3030-5W




Power 5W (4W/3.5W)
Light flux 320-500lm
Beam angle 360°/160°
Color rendering 80
Color temp. 3000K/4000K

Finishes



NEW
DC-PD145-3060-7W



Power 7W (6W/5W)
Light flux 410-700lm
Beam angle 360°/160°
Color rendering 80
Color temp. 3000K/4000K

Finishes



NEW
DC-PD145-3090-10W




Power 10W (8.5W/6.5W)
Light flux 590-1000lm
Beam angle 360°/160°
Color rendering 80
Color temp. 3000K/4000K

Finishes



NEW
DC-PD145-35120-15W




Power 15W (11W/9W)
Light flux 1260-2250lm
Beam angle 360°/160°
Color rendering 80
Color temp. 3000K/4000K

Finishes



NEW
DC-PD145-3590-7W




Power 7W (6W/5W)
Light flux 630-1050lm
Beam angle 360°/160°
Color rendering 80
Color temp. 3000K/4000K

Finishes



NEW
DC-PD145-35120-10W




Power 10W (8.5W/6.5W)
Light flux 910-2250lm
Beam angle 360°/160°
Color rendering 80
Color temp. 3000K/4000K

Finishes



LED Track light
5.25V

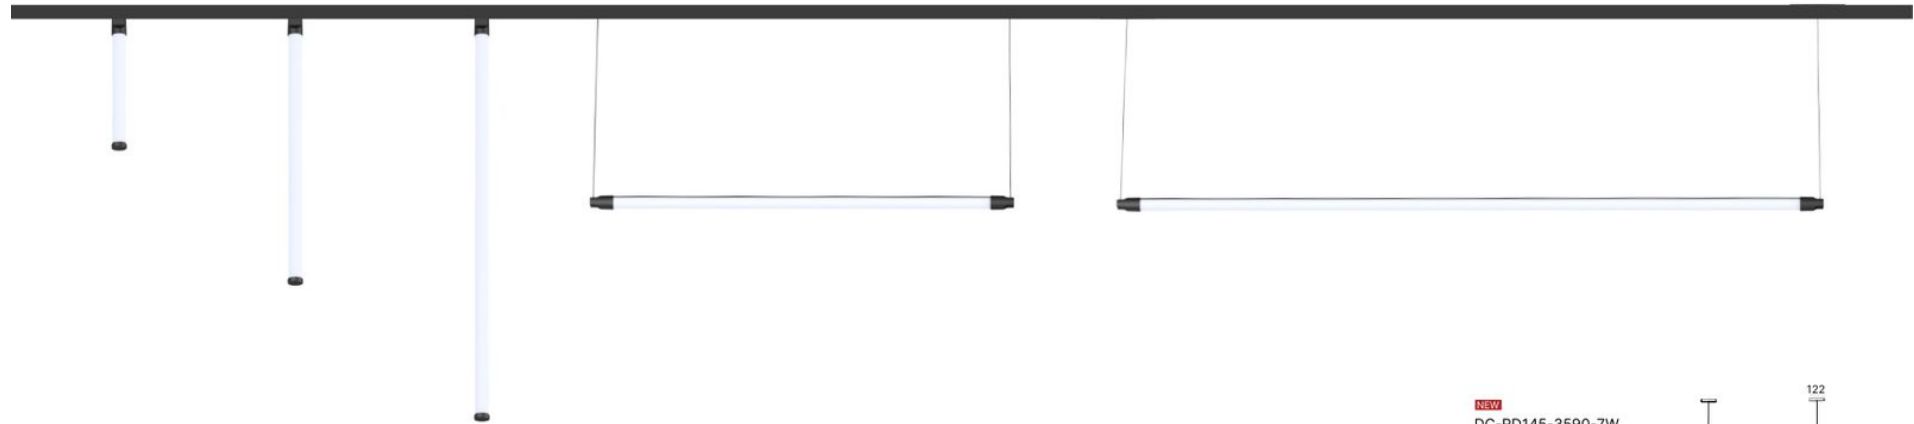

NEW
DC-PD145-3030-5W



Power 5W (4W/3.5W)
Light flux 320-500lm
Beam angle 360°/160°
Color rendering 80
Color temp. 3000K/4000K

Finishes



NEW
DC-PD145-3060-7W



Power 7W (6W/5W)
Light flux 410-700lm
Beam angle 360°/160°
Color rendering 80
Color temp. 3000K/4000K

Finishes



NEW
DC-PD145-3090-10W



Power 10W (8.5W/6.5W)
Light flux 590-1000lm
Beam angle 360°/160°
Color rendering 80
Color temp. 3000K/4000K

Finishes



NEW
DC-PD145-35120-15W




Power 15W (11W/9W)
Light flux 1260-2250lm
Beam angle 360°/160°
Color rendering 80
Color temp. 3000K/4000K

Finishes



NEW
DC-PD145-3590-7W




Power 7W (6W/5W)
Light flux 630-1050lm
Beam angle 360°/160°
Color rendering 80
Color temp. 3000K/4000K

Finishes



NEW
DC-PD145-35120-10W



Power 10W (8.5W/6.5W)
Light flux 910-2250lm
Beam angle 360°/160°
Color rendering 80
Color temp. 3000K/4000K

Finishes



LED Track light
5.25V



NEW
DC-PD142-50117-11W



Power 11W(9W/6.5W optional)
Light flux 920lm/760lm/550lm
Beam angle 24°/36°/50°
Color rendering 90
Color temp. 3000K/4000K

Finishes




NEW
DC-PD142-50117-11W (Bowl)



Power 11W(9W/6.5W optional)
Light flux 710lm/590lm/450lm
Beam angle 100°
Color rendering 90
Color temp. 3000K/4000K

Finishes

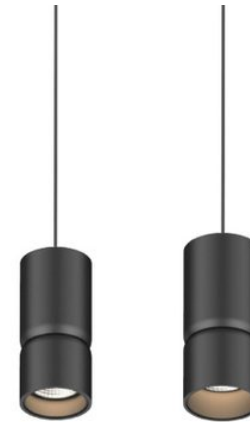

NEW
DC-PD142-4054-7W



Power 7W(6W/4.5W optional)
Light flux 690lm/610lm/470lm
Beam angle 36°/45°/60°
Color rendering 90
Color temp. 3000K/4000K

Finishes



NEW
DC-PD142-5067-9W



Power 9W(7W/5.5W optional)
Light flux 820lm/650lm/520lm
Beam angle 24°/36°/50°
Color rendering 90
Color temp. 3000K/4000K


Finishes



Glass

Cage

NEW
DC-PD142-5046-7W



Power 7W(6W/4.5W optional)
Light flux 360lm / 330lm / 260lm
Beam angle 300° / 70°
Color rendering 90
Color temp. 3000K/4000K

Finishes



LED Track light
5, 48V

CK8(SM) NEW Backlit panel light



CK8(SM) is a back-lit panel light that supports ceiling installation. Its major advantage lies in its frameless design, which creates a larger illuminated surface. The rounded edges around the panel, with their smooth lines, high-quality texture, and simple design, provide users with an ultimate aesthetic experience. It adopts high-brightness SMD2835 led chip, combined with optical-grade lenses to ensure a uniform and full light output.

Materials of Housing : Aluminium(frame), SPCC(back plate)

Materials of Optics : PMMA(Lens)+PS(Diffuser)



Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
CK8-6060-36W(SM)	36W	595x595x63	4500lm	2.95	4PCS
CK8-30120-36W(SM)	36W	295x1195x63	4300lm	3.17	4PCS

CCT — 3000K — 4000K — 5700K

Finish — White

CK32 NEW Backlit panel light



CK32 is an integral surface mounted panel, with high-quality SPCC and aluminum structure. It reached high lumen efficiency 120lm/W. Multiple size in 4545, 6060, 6262, 30120, 30150. Function is available with triac dim, 0/1-10V, DALI dim.

Materials of Housing : SPCC+Aluminium

Materials of Optics : PMMA+PS




Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
CK32-4545-25W	25W	450x450x48	3000lm	2.20	6PCS
CK32-6060-36W	36W	604x604x48	4320lm	2.80	5PCS
CK32-6262-36W	36W	629x629x48	4320lm	3.20	5PCS
CK32-30120-42W	42W	1204x304x48	4320lm	2.95	5PCS
CK32-30150-42W	42W	1550x295x48	5040lm	3.80	4PCS


CCT — 2700K — 3000K — 6500K

Finish — White

Installation accessories — Suspension kit (Customized length)

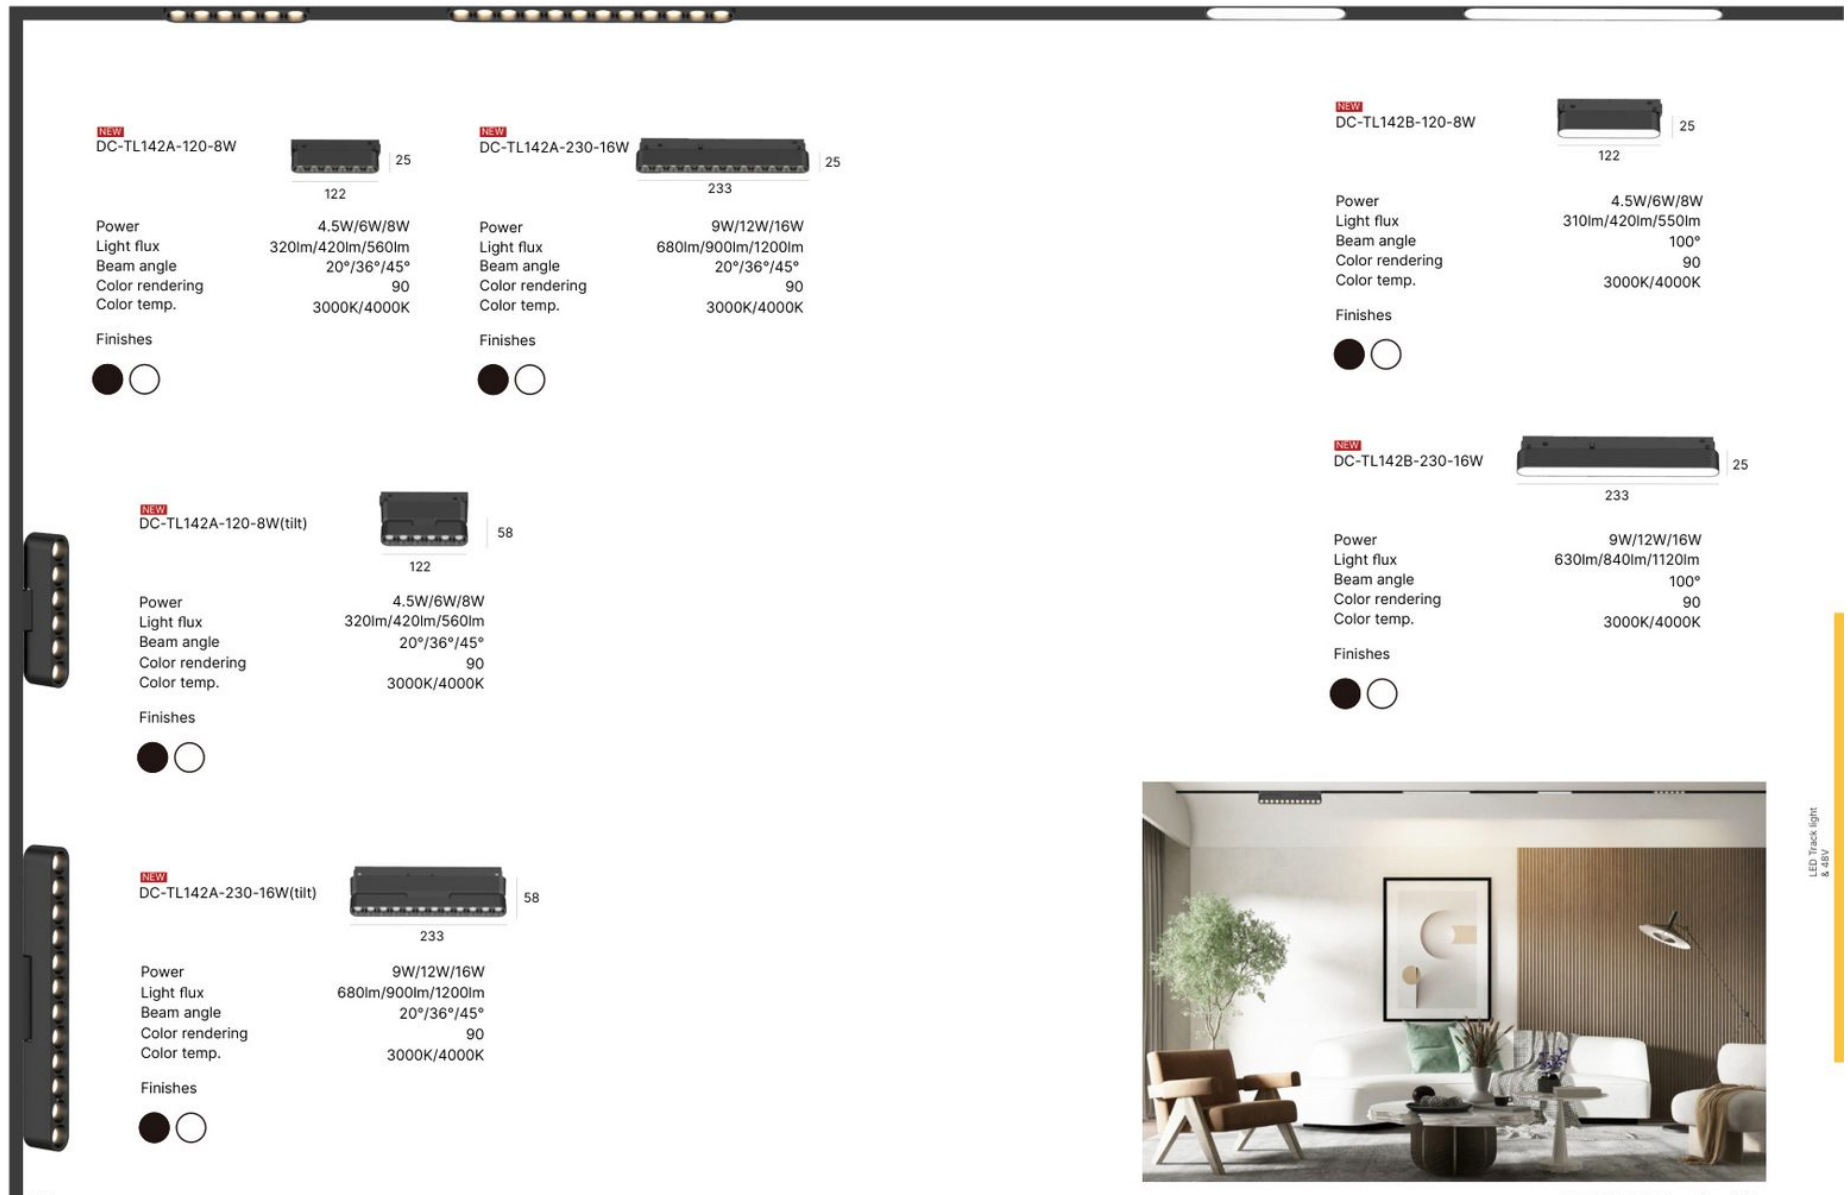

NEW
DC-TL142A-120-8W




122 25

Power 4.5W/6W/8W
Light flux 320lm/420lm/560lm
Beam angle 20°/36°/45°
Color rendering 90
Color temp. 3000K/4000K

Finishes  

NEW
DC-TL142A-230-16W



233 25

Power 9W/12W/16W
Light flux 680lm/900lm/1200lm
Beam angle 20°/36°/45°
Color rendering 90
Color temp. 3000K/4000K

Finishes  

NEW
DC-TL142B-120-8W



122 25

Power 4.5W/6W/8W
Light flux 310lm/420lm/550lm
Beam angle 100°
Color rendering 90
Color temp. 3000K/4000K

Finishes  

NEW
DC-TL142B-230-16W



233 25

Power 9W/12W/16W
Light flux 630lm/840lm/1120lm
Beam angle 100°
Color rendering 90
Color temp. 3000K/4000K

Finishes  

NEW
DC-TL142A-120-8W(tilt)



122 58

Power 4.5W/6W/8W
Light flux 320lm/420lm/560lm
Beam angle 20°/36°/45°
Color rendering 90
Color temp. 3000K/4000K

Finishes  

NEW
DC-TL142A-230-16W(tilt)




233 58


Power 9W/12W/16W
Light flux 680lm/900lm/1200lm
Beam angle 20°/36°/45°
Color rendering 90
Color temp. 3000K/4000K

Finishes  




LED Track light
5, 48V

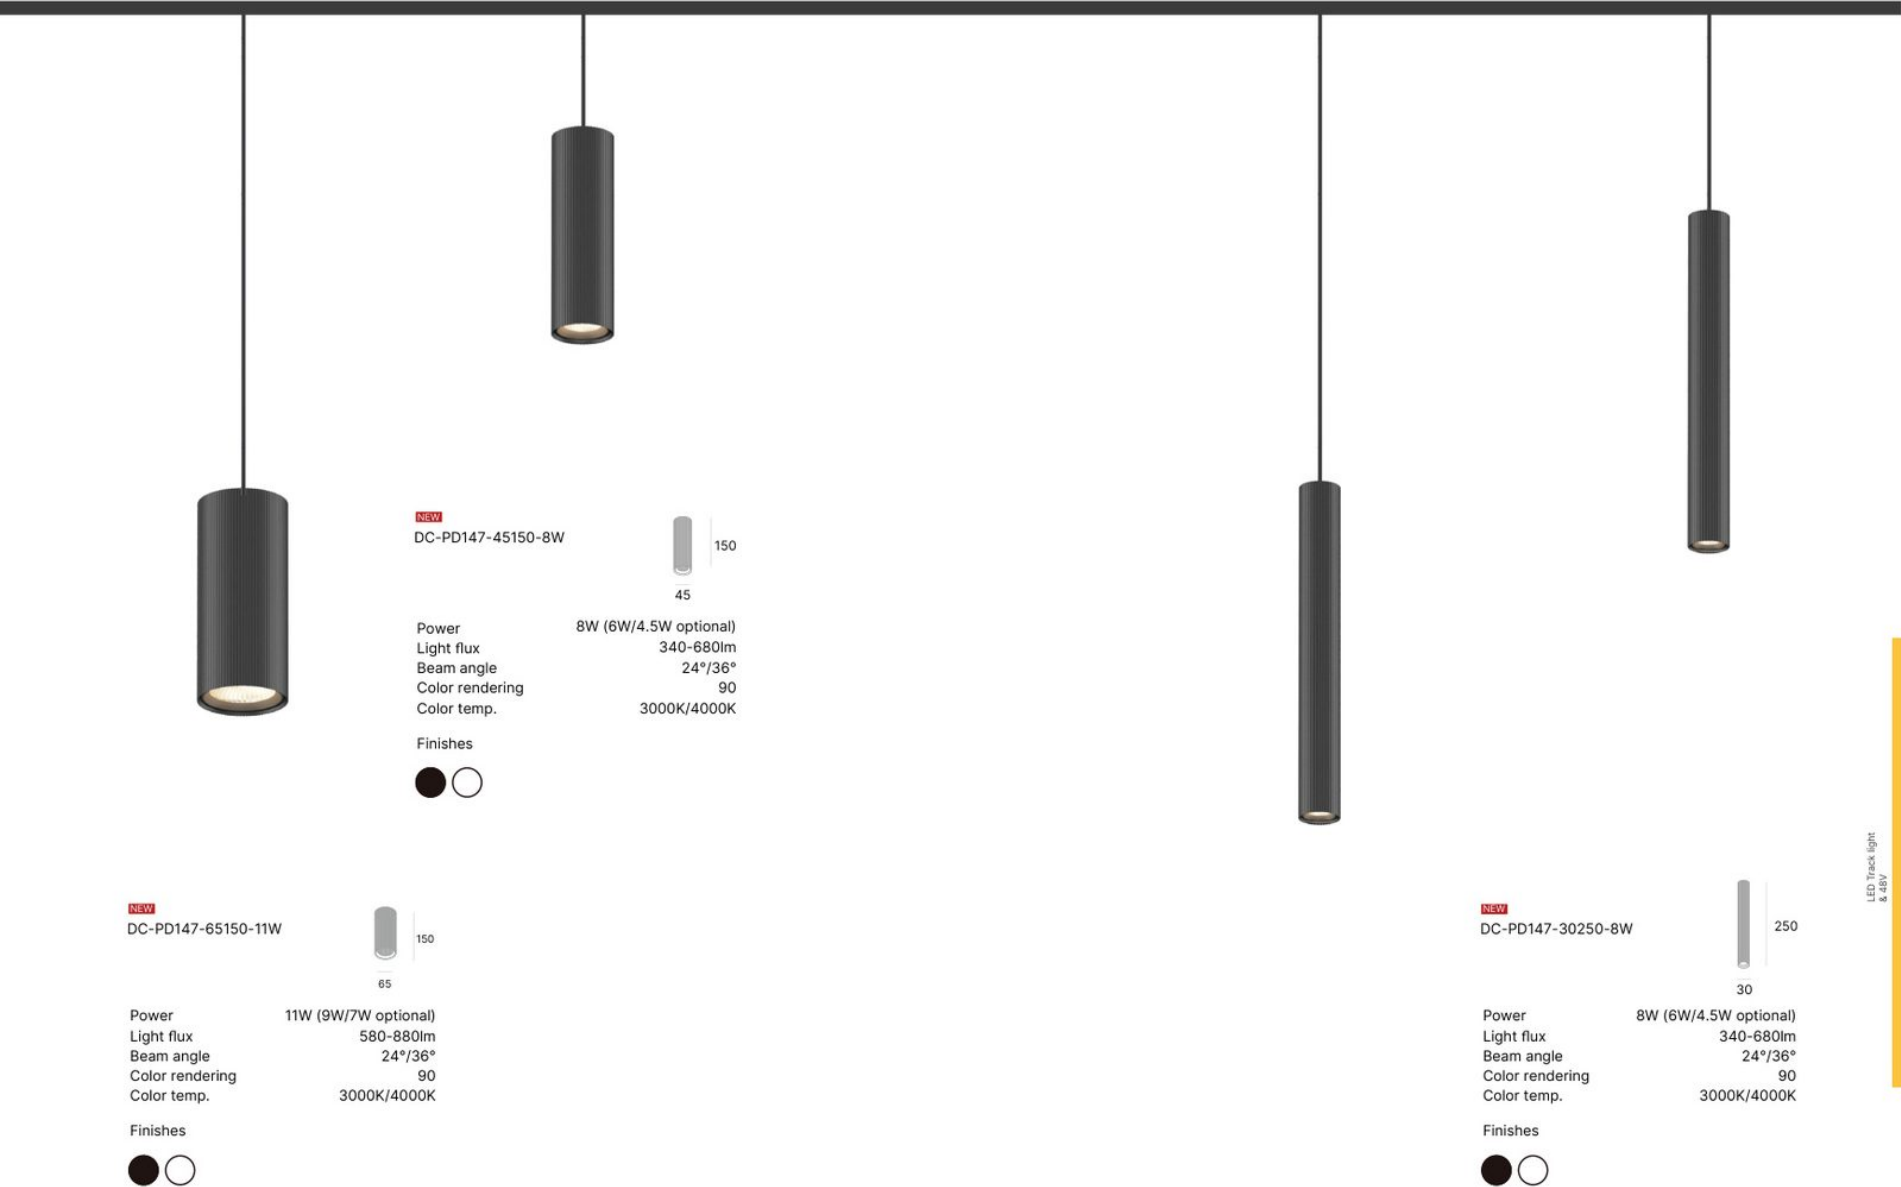

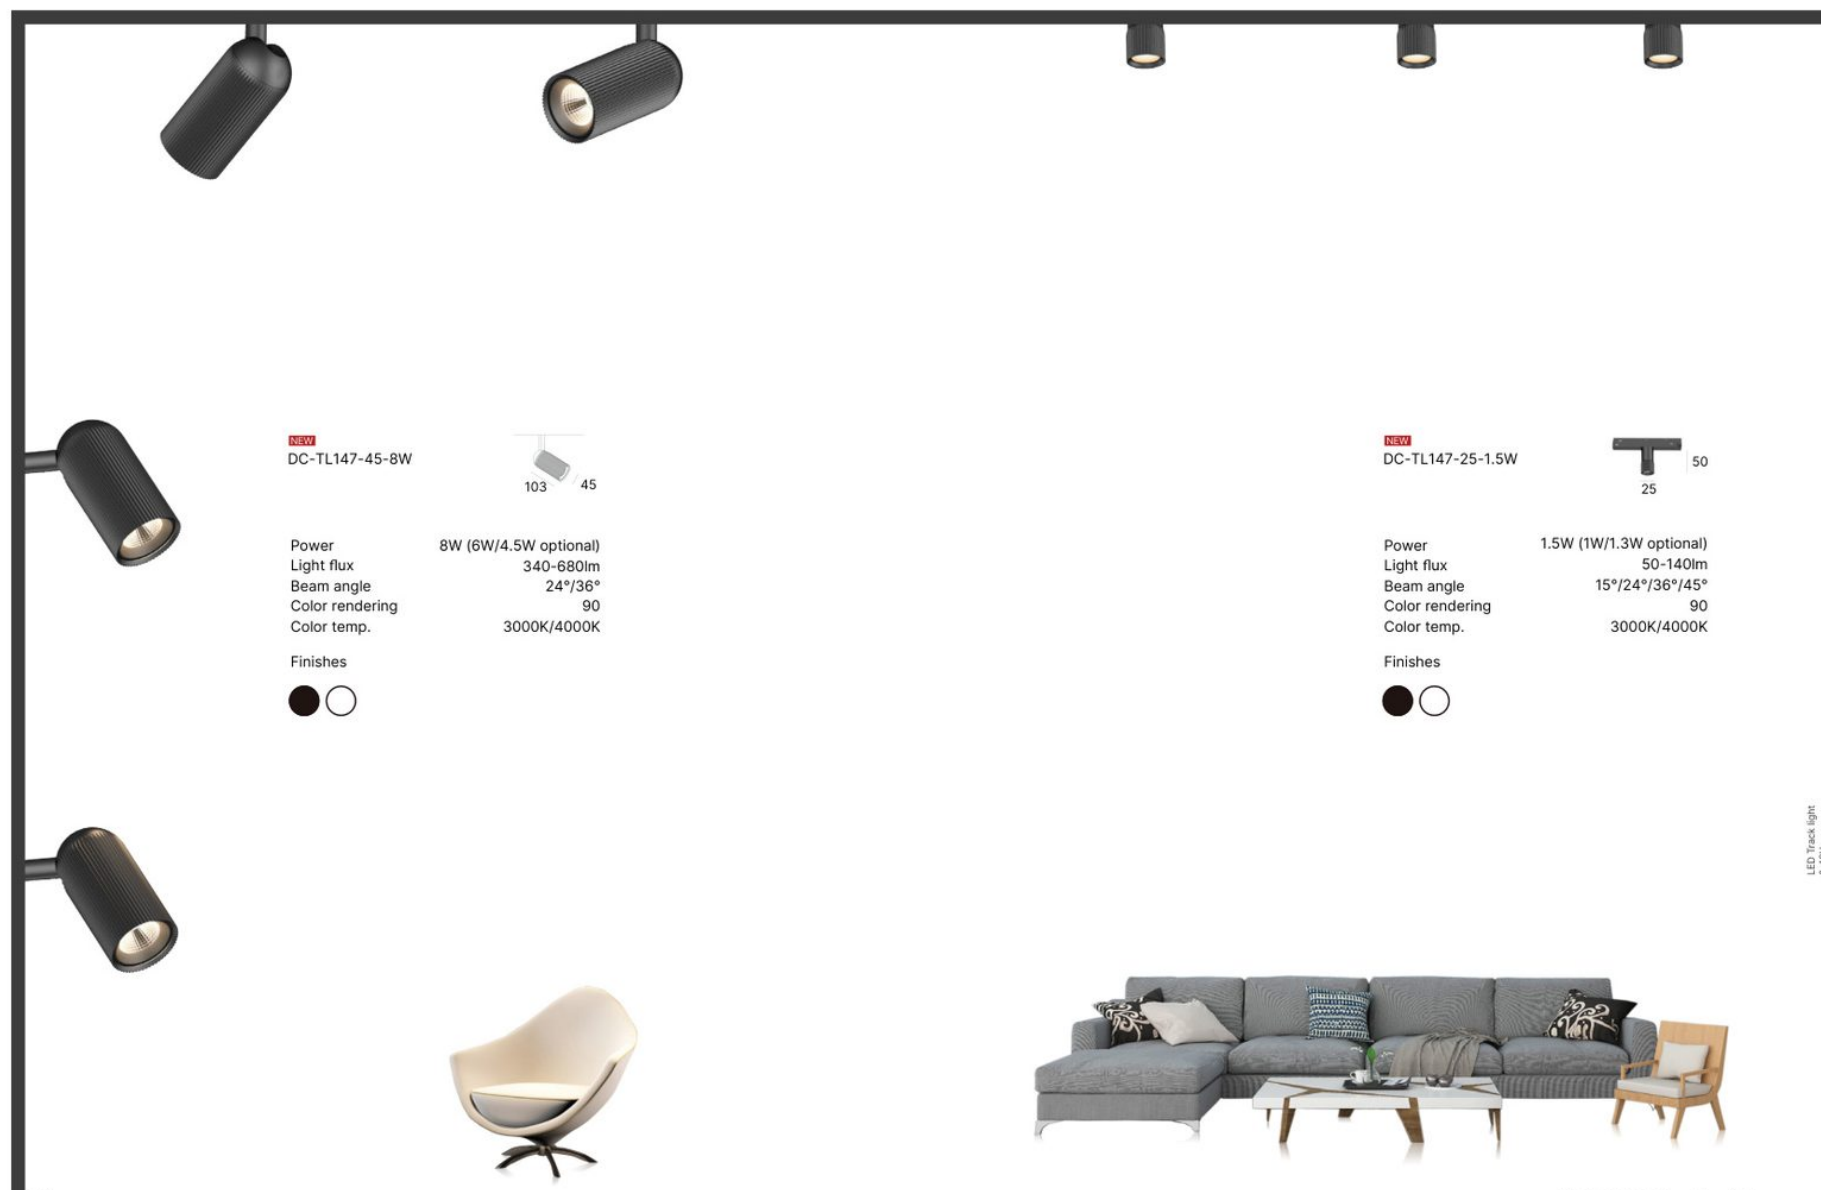


Wall Light

10 TECHNICAL DATASHEETS

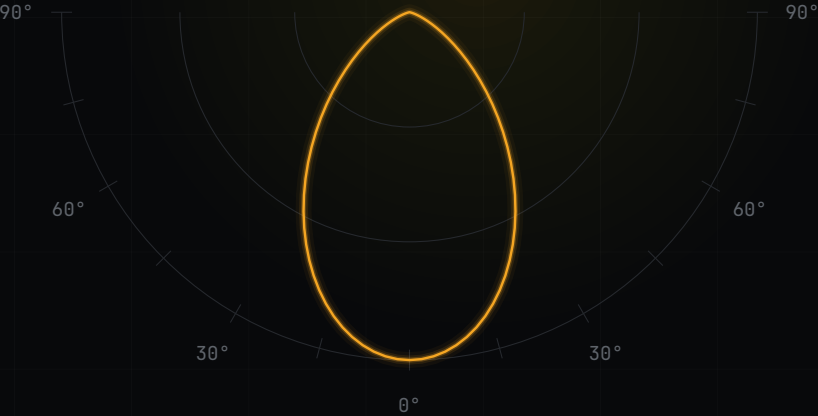


WL146

WALL LIGHT | LED SMD | Internal driver
Aluminium | PMMA




WL146-180-8W



WL146-240-10W



WL146-360-16W



WL146-600-20W

Code	Voltage	Watt	Lumen(±5%)	Class
WL146-180-8W	AC220-240V	8W	1000lm	I
WL146-240-10W	AC220-240V	10W	1200lm	I
WL146-360-16W	AC220-240V	16W	1900lm	I
WL146-600-20W	AC220-240V	20W	2300lm	I

Beam Angle

40°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



Certification

SAA RoHS CE

WL102

WALL LIGHT | LED SMD | Internal driver
Aluminium+PC | PC



WL102-8W



Code	Voltage	Watt	Lumen(±5%)	Class
WL102-8W	AC220-240V	4.8+3.2W	770lm	I



Beam Angle

120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear




Certification

SAA RoHS CE


Interior Mirror
& Wall Light

WL126

WALL LIGHT | LED SMD | Internal driver
Aluminium | PC



WL126A-3W



WL126B-3W

Beam Angle
60°

Light Source		
CRI≥80	SDCM<6	
2700K	3000K	4000K


Gear		
ON/OFF	Flicker Free	PF≥0.4

Certification		
SAA	RoHS	CE

Code	Voltage	Watt	Lumen(±5%)	Class
WL126A-3W	AC220-240V	3W	98lm(BK)/155lm(WH)	I
WL126B-3W	AC220-240V	3W	90lm(BK)/155lm(WH)	I

WL141

WALL LIGHT | LED SMD | Internal driver
Aluminium | PC

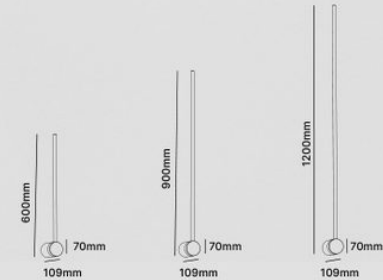

Code	Voltage	Watt	Lumen(±5%)	Class
WL141A-12W	AC220-240V	12W	1190lm	I
WL141A-15W	AC220-240V	15W	1550lm	I
WL141A-20W	AC220-240V	20W	2100lm	I
WL141B-12W	AC220-240V	12W	1170lm	I
WL141B-15W	AC220-240V	15W	1550lm	I
WL141B-20W	AC220-240V	20W	2100lm	I



Beam Angle
120°

Light Source		
CRI≥80	CRI≥90	SDCM<6
2700K	3000K	4000K

Gear		
ON/OFF	Flicker Free	PF≥0.85 PF≥0.9


Certification		
SAA	RoHS	CE

Interior Mirror
& Wall Light



WL02

WALL LIGHT

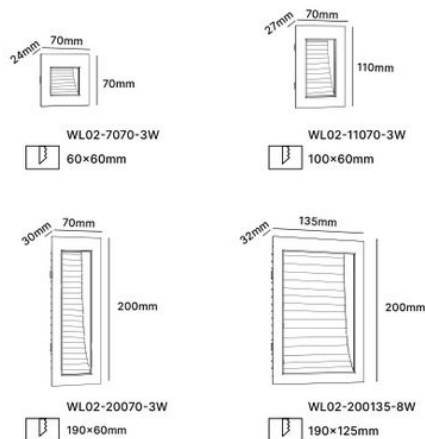LED SMD | External driver
Aluminium ADC12 | Glass

Beam Angle

A-30°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF PF≥0.5


Certification

SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
WL02-7070-3W	AC100-240V	3W	220lm	II
WL02-11070-3W	AC100-240V	3W	220lm	II
WL02-20070-3W	AC100-240V	3W	220lm	II
WL02-200135-8W	AC100-240V	8W	580lm	II

WL161

WALL LIGHT

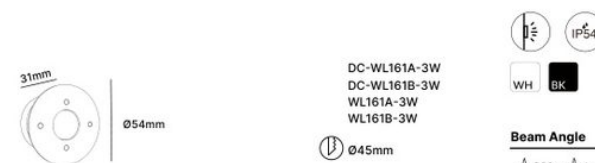LED SMD | Internal driver
Aluminium | PC

Ø45mm



Beam Angle

A-30° A-Asymmetric 30°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K


Gear

ON/OFF PF≥0.5

Certification

SAA RoHS CE

Accessories



Code	Voltage	Watt	Lumen(±5%)	Class
DC-WL161A-3W	DC12V	3W	220lm	III
DC-WL161B-3W	DC12V	3W	200lm	III
WL161A-3W	AC220-240V	3W	220lm	II
WL161B-3W	AC220-240V	3W	200lm	II

Interior Mirror
& Wall Light



WL175B Overbed Light



WL175B cornice luminaire gives a downward, angled light output. It has three cable entry holes on backward and knock hole in end cap which supports more possibility for different application cable connection.

Materials of Housing : Aluminium

Materials of Optics : PC

Painting : Detergent resistant powder coating/
anti-microbial painting



Application


hospital, health care center, aging care center.

Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
WL175B-680-34W	34W	680x117.9x160.3	4000lm	3.20	2PCS
WL175B-680-50W	50W	680x117.9x160.3	6000lm	3.20	2PCS
WL175B-980-50W	50W	980x117.9x160.3	6000lm	4.46	1PCS
WL175B-980-60W	60W	980x117.9x160.3	8000lm	4.46	1PCS
WL175B-1280-50W	50W	1280x117.9x160.3	6000lm	6.20	1PCS
WL175B-1280-60W	60W	1280x117.9x160.3	8000lm	6.20	1PCS

CCT — 2700K — 3000K — 4000K

Finish —  White  Black

WL175C Overbed Light



WL175C cornice luminaire gives a downward, angled light output. It has three cable entry holes on backward and knock hole in end cap which supports more possibility for different application cable connection.

Materials of Housing : Aluminium

Materials of Optics : PC

Painting : Detergent resistant powder coating/
anti-microbial painting




Application

hospital, health care center, aging care center.

Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
WL175C-680-34W	34W	680x117.9x160.3	4000lm	3.00	2PCS
WL175C-680-50W	50W	680x117.9x160.3	6000lm	3.00	2PCS
WL175C-980-50W	50W	980x117.9x160.3	6000lm	4.26	1PCS
WL175C-980-60W	60W	980x117.9x160.3	8000lm	4.26	1PCS
WL175C-1280-50W	50W	1280x117.9x160.3	6000lm	6.00	1PCS
WL175C-1280-60W	60W	1280x117.9x160.3	8000lm	6.00	1PCS


CCT — 2700K — 3000K — 4000K

Finish —  White  Black



WL106

WALL LIGHT | LED SMD | Internal driver
Aluminium+PC | PC



WL106-8W



Beam Angle

160°

Light Source

CRI≥80 SDCM<6
2700K 3000K 4000K

Gear



Certification

SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
WL106-8W	AC220-240V	2×4W	730lm	I

WL101

WALL LIGHT | LED SMD | Internal driver
Aluminium+SPCC | PC



WL101-8W



Beam Angle

90°

Light Source

CRI≥80 SDCM<6
2700K 3000K 4000K

Gear



Certification


SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
WL101-8W	AC220-240V	2×4W	700lm	I


Interior Mirror
& Wall Light

WL146

WALL LIGHT | LED SMD | Internal driver
Aluminium | PMMA




WL146-180-8W



WL146-240-10W



WL146-360-16W



WL146-600-20W

Code	Voltage	Watt	Lumen(±5%)	Class
WL146-180-8W	AC220-240V	8W	1000lm	I
WL146-240-10W	AC220-240V	10W	1200lm	I
WL146-360-16W	AC220-240V	16W	1900lm	I
WL146-600-20W	AC220-240V	20W	2300lm	I

Beam Angle

40°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF DIM Flicker Free PF≥0.9

Certification

SAA RoHS CE

WL102

WALL LIGHT | LED SMD | Internal driver
Aluminium+PC | PC



WL102-8W



Code	Voltage	Watt	Lumen(±5%)	Class
WL102-8W	AC220-240V	4.8+3.2W	770lm	I



Beam Angle

120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF DIM Flicker Free PF≥0.9

Certification


SAA RoHS CE

Interior Mirror
& Wall Light

WL134

WALL LIGHT

LED SMD | Internal driver
Aluminium | PC/PC+PMMA



WL134A-4W

WL134B-4W



Beam Angle

A20° A40°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



Code	Voltage	Watt	Lumen(±5%)	Class
WL134A-4W	AC220-240V	4W	510lm	I
WL134B-4W	AC220-240V	4W	450lm	I


Certification

SAA RoHS CE

WL100

NEW WALL LIGHT

LED COB | Internal driver
Aluminium | PC

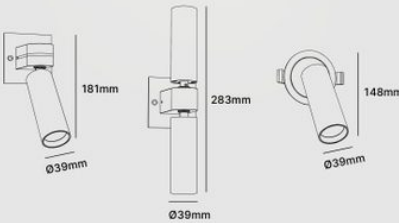

WL100A-5W-D

WL100B-10W-D

WL100C-5W-D



Beam Angle

A24° A36° A60°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear




Code	Voltage	Watt	Lumen(±5%)	Class
WL100A-5W-D	AC220-240V	5W	600lm	I
WL100B-10W-D	AC220-240V	10W	1100lm	I
WL100C-5W-D	AC220-240V	5W	600lm	I

Certification


SAA RoHS CE

Interior Mirror
& Wall Light

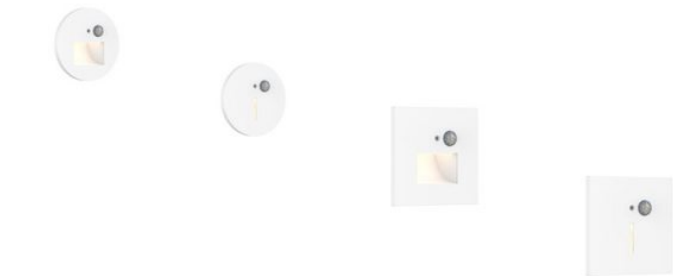


WL124

WALL LIGHT | LED SMD | Internal driver
PC | PC



WL124A-1W
WL124A-2W



WL124B-1W
WL124B-2W

Beam Angle

80° 90°

Light Source

CRI=90 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF  PF≥0.35  

Certification

SAA RoHS CE

Accessories



Code	Voltage	Watt	Lumen(±5%)	Class
WL124A-1W	AC200-240V	1W	40lm	II
WL124A-2W	AC200-240V	2W	80lm	II
WL124B-1W	AC200-240V	1W	40lm	II
WL124B-2W	AC200-240V	2W	80lm	II



Interior Mirror & Wall Light



WL175C

NEW
WALL LIGHT

LED SMD | Internal driver
Aluminium | PC



WL175C-680-34W
WL175C-680-50W



WH

Beam Angle

90° 60°

Light Source

CRI≥90 SDCM<6

2700K 3000K 4000K

Gear

ON/OFF DALI Flicker Free PF≥0.95

Certification

SAA RoHS CE



WL175C-980-50W
WL175C-980-60W



WL175C-1280-50W
WL175C-1280-60W


Code	Voltage	Watt	Lumen(±5%)	Class
WL175C-680-34W	AC220-240V	34W	4000lm	I
WL175C-680-50W	AC220-240V	50W	6000lm	I
WL175C-980-50W	AC220-240V	50W	6000lm	I
WL175C-980-60W	AC220-240V	60W	8000lm	I
WL175C-1280-50W	AC220-240V	50W	6000lm	I
WL175C-1280-60W	AC220-240V	60W	8000lm	I



WL170

NEW
WALL LIGHT

LED SMD | Internal driver
Aluminium | PC



WL170-1200-20W



WH BK

Beam Angle

100°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear


ON/OFF DIM Flicker Free PF≥0.9

Certification

SAA RoHS CE



WL170-1500-25W



WL170-1800-28W


Code	Voltage	Watt	Lumen(±5%)	Class
WL170-1200-20W	AC220-240V	20W	2400lm	I
WL170-1500-25W	AC220-240V	25W	3000lm	I
WL170-1800-28W	AC220-240V	28W	3360lm	I

Interior Mirror
& Wall Light



WL95

WALL LIGHT

LED SMD | Internal driver
Aluminium | PCWL95-8W-C2
WL95-8W-P2

Code	Voltage	Watt	Lumen(±5%)	Class
WL95-8W-C2	AC220-240V	8W	435lm	I
WL95-8W-P2	AC220-240V	8W	425lm	I



Beam Angle

★360°

Light Source

CRI≥80 SDCM<6


2700K 3000K 4000K

Gear



Certification

SAA RoHS CE



WL99

WALL LIGHT

LED SMD | Internal driver
Aluminium | PCWL99-10W
WL99-10W-D

Code	Voltage	Watt	Lumen(±5%)	Class
WL99-10W	AC100-240V	10W	750lm	I
WL99-10W-D	AC100-240V	10W	700lm	I

Beam Angle

★120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



Certification

SAA RoHS CE

Lawn & Landscape Light

9 TECHNICAL DATASHEETS




WL154

NEW
WALL LIGHT | LED COB | Internal driver
Aluminium | PMMA



WL154-8W



WL154-16W

Code	Voltage	Watt	Lumen(±5%)	Class
WL154-8W	AC220-240V	8W	1050lm	II
WL154-16W	AC220-240V	16W	1990lm	II



WL154

NL154A/B
P672

NL154C
P673



Beam Angle

36° 60°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



Certification

SAA RoHS CE

SOL01

SOLAR WALL LIGHT | LED SMO | Internal driver
PC | PC



SOL01-1.2W



Beam Angle

200°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



Certification



SAA RoHS CE

Exterior Wall
& Bollard



NL14

SPIKE LIGHT

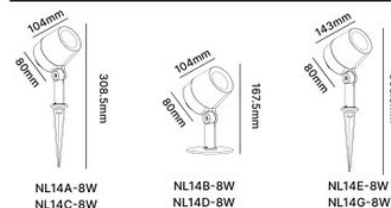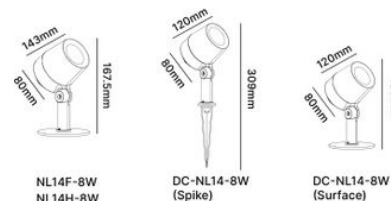LED COB | Internal driver
Aluminium | AluminiumNL14A-8W
NL14C-8WNL14B-8W
NL14D-8WNL14E-8W
NL14G-8WNL14F-8W
NL14H-8WDC-NL14-8W
(Spike)DC-NL14-8W
(Surface)

Code	Voltage	Watt	Lumen(±5%)	Class
NL14A-8W	AC220-240V	8W	910lm	I
NL14B-8W	AC220-240V	8W	910lm	I
NL14C-8W	AC/DC12V	8W	850lm	III
NL14D-8W	AC/DC12V	8W	850lm	III
NL14E-8W	AC220-240V	8W	910lm	I
NL14F-8W	AC220-240V	8W	910lm	I
NL14G-8W	AC/DC12V	8W	850lm	III
NL14H-8W	AC/DC12V	8W	850lm	III
DC-NL14-8W(Surface)	AC/DC12V	8W	950lm	III
DC-NL14-8W(Spike)	AC/DC12V	8W	950lm	III



Beam Angle

$\angle 15^\circ$
 $\angle 24^\circ$
 $\angle 45^\circ$
 $\angle 50^\circ$

Light Source

CRI≥80 SDCM<6

2700K
3000K
4000K


Gear

☐ ON/OFF
 ☐ Flicker Free
 PF≥0.9

Certification

SAA RoHS CE

Accessories



NL06

SPIKE LIGHT

LED SMD | Internal driver
Aluminium | PCNL06A-6W
NL06A-8WNL06B-6W
NL06B-8W

Beam Angle

$\angle 45^\circ$
 $\angle 60^\circ$

Light Source

CRI≥80 SDCM<6

2700K
3000K
4000K

Gear

☐ ON/OFF
 ☐ Flicker Free
 PF≥0.9

Certification

SAA RoHS CE




WL154

NEW
WALL LIGHT | LED COB | Internal driver
Aluminium | PMMA



WL154-8W



WL154-16W

Code	Voltage	Watt	Lumen(±5%)	Class
WL154-8W	AC220-240V	8W	1050lm	II
WL154-16W	AC220-240V	16W	1990lm	II



WL154

NL154A/B
P672

NL154C
P673



Beam Angle

36° 60°

Light Source

CRI≥80 SDCM<6
2700K 3000K 4000K

Gear



Certification

SAA RoHS CE

SOL01

PATENT
SOLAR WALL LIGHT | LED SMO | Internal driver
PC | PC



SOL01-1.2W



Beam Angle

200°

Light Source

CRI≥80 SDCM<6
2700K 3000K 4000K

Gear



Certification


SAA RoHS CE

WL154

NEW
WALL LIGHT | LED COB | Internal driver
Aluminium | PMMA



WL154-8W



WL154-16W

Code	Voltage	Watt	Lumen(±5%)	Class
WL154-8W	AC220-240V	8W	1050lm	II
WL154-16W	AC220-240V	16W	1990lm	II



WL154

NL154A/B
P672

NL154C
P673



Beam Angle

36° 60°

Light Source

CRI≥80 SDCM<6
2700K 3000K 4000K

Gear




Certification

SAA RoHS CE

SOL01

SOLAR WALL LIGHT | LED SMO | Internal driver
PC | PC



SOL01-1.2W



Beam Angle

200°

Light Source

CRI≥80 SDCM<6
2700K 3000K 4000K

Gear



Certification

SAA RoHS CE


Code	Voltage	Watt	Lumen(±5%)	Class
SOL01-1.2W	DC3V	1.2W	110lm	III



NL18

NEW
SPIKE LIGHT

LED COB | Internal driver
Aluminium | PC



DC-NL18-5W



Beam Angle
24° 36° 50° 60°

Light Source
CRI≥80 SDCM<6
2700K 3000K 4000K

Gear
ON/OFF Touch Free

Code	Voltage	Watt	Lumen(±5%)	Class
DC-NL18-5W	DC24V	5W	550lm	III

Certification
SAA RoHS CE



NL16

NEW
SPIKE LIGHT

LED SMD | Internal driver
Aluminium | PC



DC-NL16-8W
DC-NL16-12W



Beam Angle
60°x100°

Light Source
CRI≥80 SDCM<6
2700K 3000K 4000K

Gear
ON/OFF Touch Free

Code	Voltage	Watt	Lumen(±5%)	Class
DC-NL16-8W	DC24V	8W	1000lm	III
DC-NL16-12W	DC24V	12W	1500lm	III


Certification
SAA RoHS CE

Exterior Wall & Bolland



WL108

WALL LIGHT

LED SMD | Internal driver
Die-casting Aluminium | PC

WL108-10W

WL108-20W

Code	Voltage	Watt	Lumen(±5%)	Class
WL108-10W	AC200-240V	10W	1050lm	I
WL108-20W	AC200-240V	20W	2150lm	I



Beam Angle


★120°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear




Certification


SAA RoHS CE

WL90A/B

WALL LIGHT

LED SMD | Internal driver
Die-casting Aluminium | PC

WL90A-8W



WL90B-8W



Beam Angle

★320° ★360°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



Certification

SAA RoHS CE

Accessories

- ACC-WL90-BK
- ACC-WL/NL90B-BK-8W-D
ACC-WL/NL90B-BK-8W-P2
- ACC-WL/NL90A-BK-8W-D
ACC-WL/NL90A-BK-8W-P2



WL90A/B


NL90A/B
P686



NL18

NEW
SPIKE LIGHT

LED COB | Internal driver
Aluminium | PC



DC-NL18-5W



Beam Angle

24° 36° 50° 60°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



Code	Voltage	Watt	Lumen(±5%)	Class
DC-NL18-5W	DC24V	5W	550lm	III

Certification

SAA RoHS CE



NL16

NEW
SPIKE LIGHT

LED SMD | Internal driver
Aluminium | PC



DC-NL16-8W
DC-NL16-12W



Beam Angle

60°x100°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear




Code	Voltage	Watt	Lumen(±5%)	Class
DC-NL16-8W	DC24V	8W	1000lm	III
DC-NL16-12W	DC24V	12W	1500lm	III

Certification

SAA RoHS CE

NL90A/B

BOLLARD

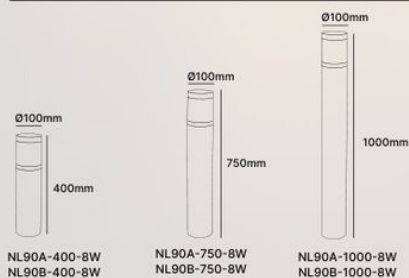LED SMD | Internal driver
Aluminium/ PC | PC

NL90A-400-8W
NL90B-400-8W

NL90A-750-8W
NL90B-750-8W

NL90A-1000-8W
NL90B-1000-8W

Code	Voltage	Watt	Lumen(±5%)	Class
NL90A-400-8W	AC220-240V	8W	700lm	I
NL90A-750-8W	AC220-240V	8W	700lm	I
NL90A-1000-8W	AC220-240V	8W	700lm	I
NL90B-400-8W	AC220-240V	8W	600lm	I
NL90B-750-8W	AC220-240V	8W	600lm	I
NL90B-1000-8W	AC220-240V	8W	600lm	I



WL90A/B
P649



NL90A/B



Beam Angle

320° 360°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



Certification

SAA RoHS CE


Accessories



ACC-NL90-
400/750/1000-BK

NL08

BOLLARD

LED SMD | Internal driver
Aluminium | PC

NL08A-10W

NL08B-10W



Beam Angle

50°

Light Source

CRI≥80 SDCM<6

2700K 3000K 4000K

Gear



Certification

SAA RoHS CE

Accessories



ACC-NL08B-00



ACC-NL08A-00

ACC-NL08-00



NL14

SPIKE LIGHT

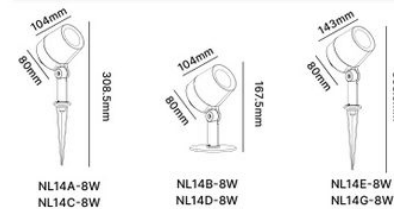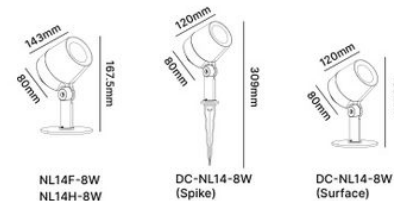LED COB | Internal driver
Aluminium | AluminiumNL14A-8W
NL14C-8WNL14B-8W
NL14D-8WNL14E-8W
NL14G-8WNL14F-8W
NL14H-8WDC-NL14-8W
(Spike)DC-NL14-8W
(Surface)

Code	Voltage	Watt	Lumen(±5%)	Class
NL14A-8W	AC220-240V	8W	910lm	I
NL14B-8W	AC220-240V	8W	910lm	I
NL14C-8W	AC/DC12V	8W	850lm	III
NL14D-8W	AC/DC12V	8W	850lm	III
NL14E-8W	AC220-240V	8W	910lm	I
NL14F-8W	AC220-240V	8W	910lm	I
NL14G-8W	AC/DC12V	8W	850lm	III
NL14H-8W	AC/DC12V	8W	850lm	III
DC-NL14-8W(Surface)	AC/DC12V	8W	950lm	III
DC-NL14-8W(Spike)	AC/DC12V	8W	950lm	III



Beam Angle

$\angle 15^\circ$
 $\angle 24^\circ$
 $\angle 45^\circ$
 $\angle 50^\circ$

Light Source

CRI≥80 SDCM<6

2700K
3000K
4000K

Gear

ON/OFF PF≥0.9

Certification

SAA RoHS CE

Accessories



NL06

SPIKE LIGHT

LED SMD | Internal driver
Aluminium | PCNL06A-6W
NL06A-8WNL06B-6W
NL06B-8W

Beam Angle

$\angle 45^\circ$
 $\angle 60^\circ$

Light Source

CRI≥80 SDCM<6

2700K
3000K
4000K

Gear

ON/OFF PF≥0.9


Certification

SAA RoHS CE



Flood Light

1 TECHNICAL DATASHEET

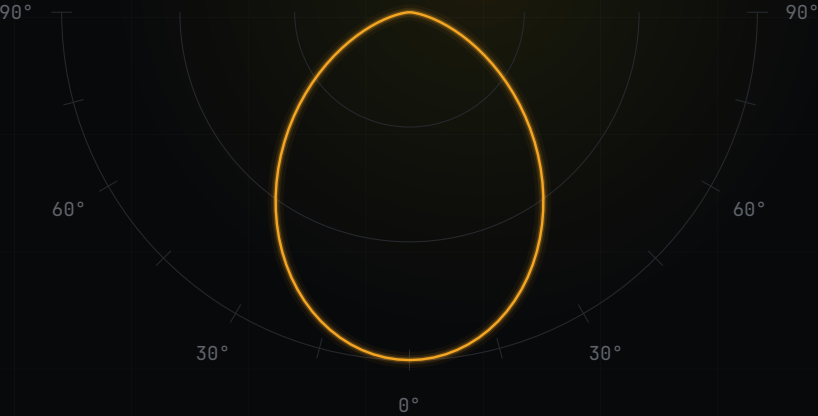




FL14

NEW
WALL LIGHT

LED SMD | Internal driver
Aluminium | PC+PMMA



FL14-10W




FL14-30W

Beam Angle

120°

Light Source

CRI≥80 SDCM<6
2700K 3000K 4000K



FL14-50W

Gear



Certification

SAA RoHS CE

Code	Voltage	Watt	Lumen(±5%)	Class
FL14-10W	AC220-240V	10W	1050lm	I
FL14-30W	AC220-240V	30W	3150lm	I
FL14-50W	AC220-240V	50W	5250lm	I



Built for specification-grade projects

06

01

Manufacturing strength

Own Jiangmen factory — tooling, SMT, aging and QC under one roof.

02

Specification quality

Architectural optics and finishes for Gulf and premium interiors.

03

Certified & tender-ready

CE · RoHS · CB · SASO documentation for consultants and procurement.

04

Factory economics

Direct factory-to-project supply for pricing and lead-time control.

05

Regional presence

Kuwait, UAE, China and Egypt — coordinated multi-country delivery.

06

OEM / ODM

Custom finishes, private label and project optics available.

01
02
03
04
05
06
07

Start your next project.

Share the space and schedule — we will return fixtures, quantities and certifications.

REQUEST A QUOTE

OFFICES

- KUWAIT • OPERATIONAL
Al-Burhan Regional Co.
+965 999 35 529 • info@alburhan-regional.com
- UNITED ARAB EMIRATES • OPERATIONAL
Al-Burhan Hegazi
+971 56 6032 765 • info@alburhan-regional.com
- CHINA • FACTORY
Jiangmen Bohan Lighting Co., Ltd
+86 137 2600 6786 • al@alburhanlighting.com *
- EGYPT • OPENING 2025
Al-Burhan Egypt
via Kuwait HQ • info@alburhan-regional.com

* Factory entity — Jiangmen Bohan Lighting Co., Ltd operates its own domain.
mslighting.alburhan-regional.com • alburhan-regional.com